



Overview

## HP ProDesk 400 G3 Desktop Mini Business PC

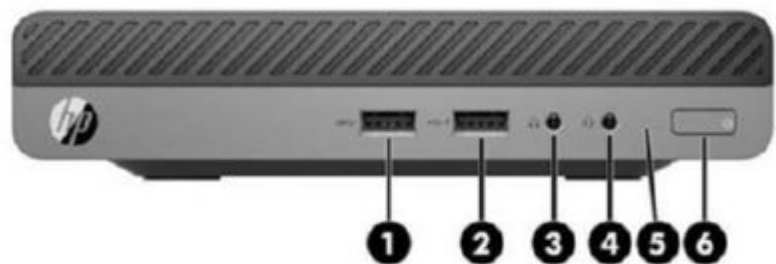

- |                                |   |
|--------------------------------|---|
| 1. USB 3.1 Gen 1 port          | 4. Universal Audio Jack with CTIA headset support |
| 2. USB 3.1 Gen 1 charging port | 5. Hard drive activity light                      |
| 3. Headphone connector         | 6. Dual-state power button                        |

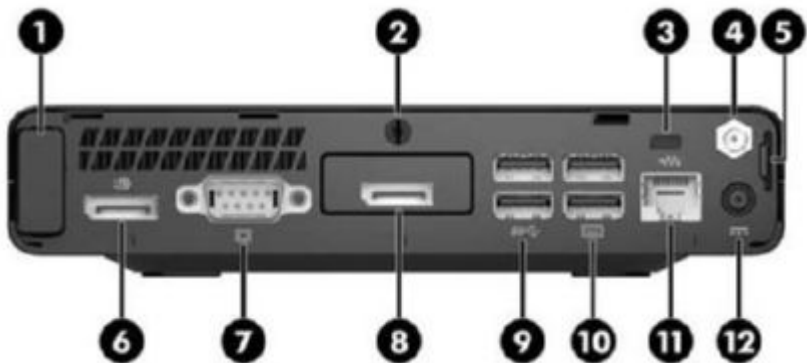


- |                                 |  |
|---------------------------------|--|
| 1. Antenna cover                | 7. Serial port   |
| 2. Cover lock switch            | 8. Choice of port (DisplayPort, HDMI, VGA or Serial)   |
| 3. Cable lock slot              | 9. (2) USB 3.1 Gen 1 ports (black)   |
| 4. External antenna connector   | 10. (2) USB 2.0 ports (black), allows for wake from S4/S5 with keyboard/mouse when connected and enabled in BIOS |
| 5. Padlock loop                 | 11. RJ-45 network jack   |
| 6. Dual-Mode DisplayPort (DP++) | 12. Power connector  |

Not Shown

- Slots (1) internal M.2 2280 connector for optional wireless NIC  
(1) internal M.2 SSD storage (2230 or 2280 connector)
- Bays (1) 2.5" internal storage drive bay
- VESA Support for VESA 100 mounting system on bottom of PC chassis


## Overview

### HP ProDesk 400 G4 Small Form Factor Business PC

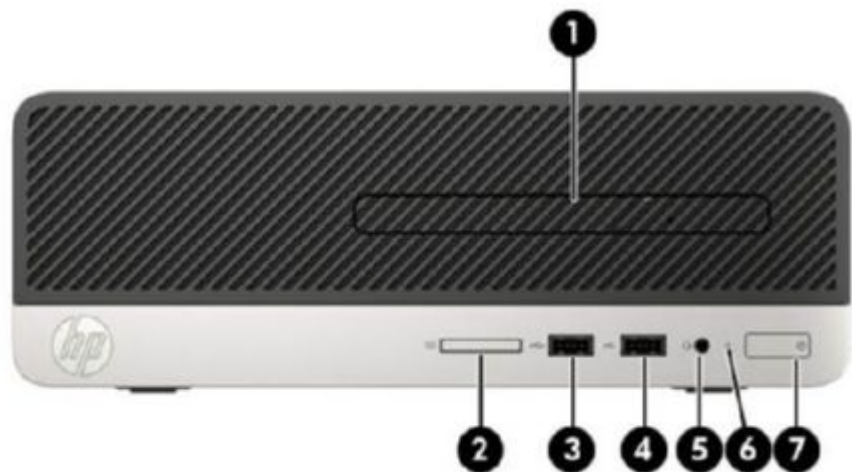

- |                                  |   |
|----------------------------------|---|
| 1. Slim Optical Drive (optional) | 5. Universal Audio Jack with CTIA headset support |
| 2. SD card 3.0 reader (optional) | 6. Hard drive activity light                      |
| 3. USB 3.1 Gen 1 port            | 7. Dual-state power button                        |
| 4. USB 3.1 Gen 1 port            |   |

### HP ProDesk 400 G4 Small Form Factor Business PC

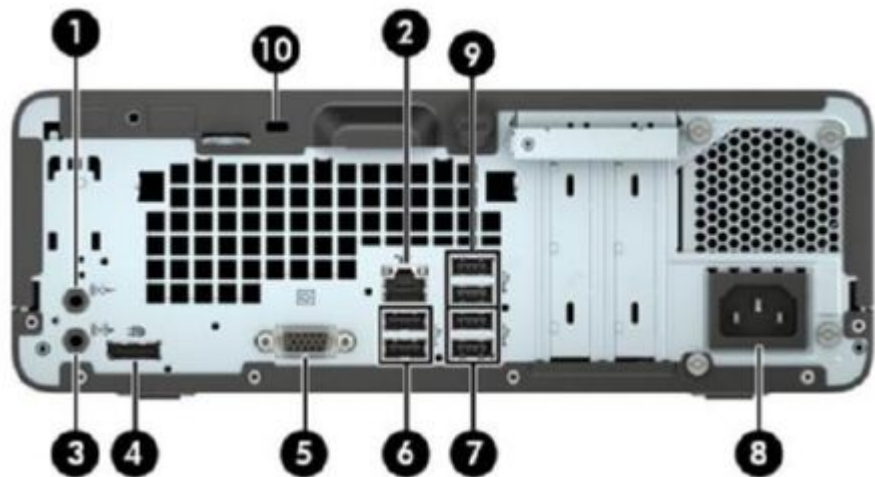

- |   |   |
|---|---|
| 1. Audio-in connector                     | 6. (2) USB 2.0 ports (black), allows for wake from S4/S5 with keyboard/mouse when connected and enabled in BIOS |
| 2. RJ-45 (network) jack                   | 7. (2) USB 3.1 Gen 1 ports  |
| 3. Audio-out connector                    | 8. Power cord connector   |
| 4. Dual-Mode DisplayPort (DP++) connector | 9. (2) USB 2.0 ports  |

### Overview

5. VGA monitor connector

10. Cable lock slot


**NOTE:** The serial port is no longer standard to the chassis. A serial port and PS/2 port PCIe combination are available.

#### Not Shown

Slots (2) PCI Express x16 graphics connector; one wired as an x4  
(1) internal M.2 PCIe x1 connector for optional wireless NIC

Bays (1) 3.5" internal storage drive bay or 2.5" internal storage drive bay  
(1) 9.5mm slim optical drive bay

### HP ProDesk 400 G4 and 480 G4\* Microtower Business PC

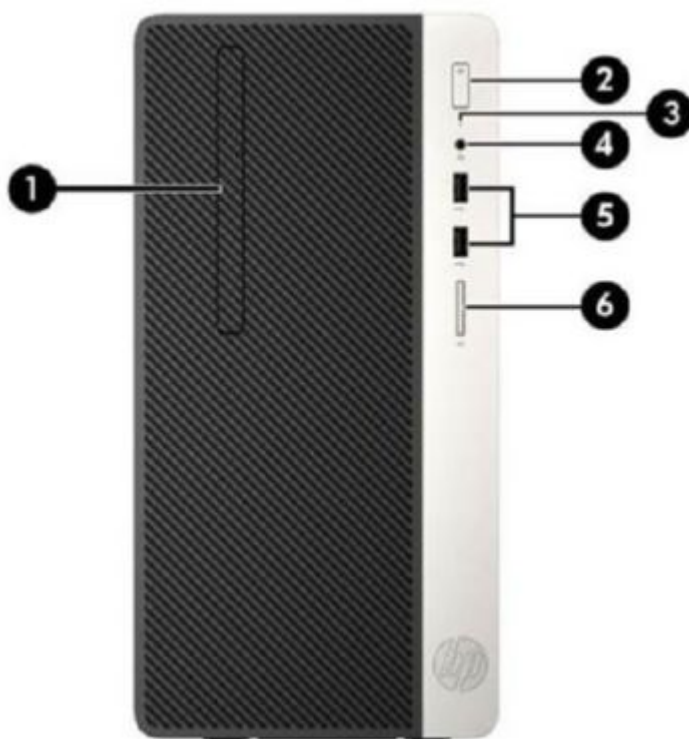

1. Slim Optical Drive (optional)

2. Dual-state power button

3. Hard drive activity light

4. Universal Audio Jack with CTIA headset support


5. (2) USB 3.1 Gen 1 ports

6. SD card 3.0 reader (optional)

\*480 G3 model not available in all regions.

Overview

## HP ProDesk 400 G4 and 480 G4\* Microtower Business PC

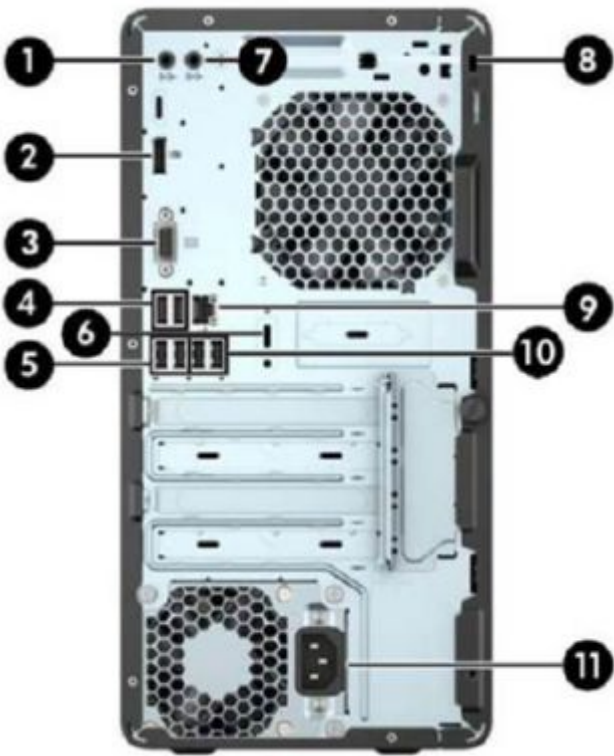

- |   |                          |
|---|--------------------------|
| 1. Audio-out connector  | 7. Audio-in connector    |
| 2. Dual-Mode DisplayPort (DP++) connector   | 8. Cable lock slot       |
| 3. VGA monitor connector  | 9. RJ-45 (network) jack  |
| 4. (2) USB 2.0 ports (black), allows for wake from S4/S5 with keyboard/mouse when connected and enabled in BIOS | 10. (2) USB 2.0 ports    |
| 5. (2) USB 3.1 Gen 1 ports  | 11. Power cord connector |
| 6. Optional serial port   |                          |

**NOTE:** The serial port is no longer standard to the chassis and a serial port and second serial port and PS/2 port combination are available from HP.

\*480 G3 model not available in all regions.

Not Shown

- Slots
- (2) PCI Express x1 graphics connectors; one wired as an x4
  - (1) PCI Express x1 accessory connector
  - (1) internal M.2 PCIe x1 connector for optional wireless NIC

**NOTE:** 480 MT model will offer (1) PCI connector instead of (1) PCI Express x1 accessory connectors

- Bays
- (1) 3.5" internal storage drive bay or 2.5" internal storage drive bay
  - (1) 3.5" internal storage drive bay
  - (1) 9.5mm internal optical drive bay

## AT A GLANCE

### Overview

- Choice of four form factors: Desktop Mini, Small Form Factor, Microtower and All-in-One (touch and non-touch configurations available) (AiO available 2H 2017)
- New commercial design on 400 G4 MT, 400 G4 SFF and 400 G3 DM
- HP-developed and engineered UEFI BIOS supporting security, manageability and software image stability
- H270 chipset supporting both Intel®7<sup>th</sup> generation Core processors and Intel® 6<sup>th</sup> generation Core processors
- Integrated Intel® HD Graphics; optional discrete graphics option available for MT and SFF form factors
- Processor support up to 65W for MT/SFF and up to 35W for Desktop Mini
- Realtek RTL8111 HSH GbE LOM Network Connection (standard)
- DDR4 Synchronous Dynamic Random Access Memory (SDRAM)
- Standard and high efficiency energy saving power supply options
- ENERGY STAR certified models available
- EPEAT® Gold registered in the United States. Registration may vary by country. See <http://www.epeat.net> for registration status in your country.
- Arsenic-free
- Dust filter available for all platforms

**NOTE:** See important legal disclosures for all listed specs in their respective features sections.

## OPERATING SYSTEMS

### Preinstalled

Windows 10 Pro 64<sup>1</sup>

Windows 10 Pro 64 (National Academic License)<sup>3</sup>

Windows 10 Home 64<sup>1</sup>

Windows 10 Home Single Language 64<sup>1</sup>

Windows 7 Professional 64 (available through downgrade rights from Windows 10 Pro)<sup>2, 4</sup>

Windows 7 Professional 32 (available through downgrade rights from Windows 10 Pro)<sup>2, 4</sup>

### Pre-installed (other)

FreeDOS 2.0

NeoKylin Linux® 64

### Web-supported only

Windows 10 Enterprise 64<sup>1</sup>

Windows 7 Enterprise 64<sup>4</sup>

1. Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

2. This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 10 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

3. Some devices for academic use will automatically be updated to Windows 10 Pro Education with the Windows 10 Anniversary Update. Features vary; see <https://aka.ms/ProEducation> for Windows 10 Pro Education feature information.

4. Only available with 6<sup>th</sup> generation (Intel) processors.

### Overview

## CHIPSET

Intel® H270

## PROCESSORS\*, \*\*

\*NOTE: Your product does not support Windows 8 or Windows 7. In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>

\*\*NOTE: Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing system required. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

Intel® 7th Generation Core i7 Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<u>Intel® Core i7-7700 Processor</u> 65W Up to 4.2 GHz Max. Turbo Frequency (3.6 GHz base frequency) 8 MB cache, 4 cores, 8 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Core i7-7700T Processor</u> 35W Up to 3.8 GHz Max. Turbo Frequency (2.9 GHz base frequency) 8 MB cache, 4 cores, 8 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			

Intel® 7th Generation Core i5 Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<u>Intel® Core i5-7500 Processor</u> 65W Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Core i5-7500T Processor</u> 35W Up to 3.3 GHz Max. Turbo Frequency (2.7 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			
<u>Intel® Core i5-7600 Processor</u> 65W Up to 4.1 GHz Max. Turbo Frequency (3.5 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Core i5-7600T Processor</u> 35W Up to 3.7 GHz Max. Turbo Frequency (2.8 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			

Intel® 7th Generation Core i3 Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
--	-----------	------------	-----------	-----------



### Overview

<u>Intel® Core i3-7100 Processor</u> 51W 3.9 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Core i3-7100T Processor</u> 35W 3.4 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			
<u>Intel® Core i3-7300 Processor</u> 51W 4.0 GHz base frequency 4 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Core i3-7300T Processor</u> 35W 3.5 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			
<u>Intel® Core i3-7320 Processor</u> 51W 4.1GHz base frequency 4 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X

### Intel® 7th Generation Pentium® Processors

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<u>Intel® Pentium® G4560 Processor</u> 54W 3.5 GHz Base Frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 610 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Pentium® G4560T Processor</u> 35W 2.9 GHz Base Frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 610 Supports DDR4 memory up to 2400 MT/s data rate	X			
<u>Intel® Pentium® G4600 Processor</u> 51W 3.6 GHz Base Frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
<u>Intel® Pentium® G4600T Processor</u> 35W 3.0 GHz Base Frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate	X			

### Overview

<a href="#">Intel® Pentium® G4620 Processor</a> 51W 3.7 GHz Base Frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 630 Supports DDR4 memory up to 2400 MT/s data rate		X	X	X
--	--	---	---	---

Intel® 7th Generation Celeron® Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Celeron® G3930 Processor</a> 51W 2.9 GHz Base Frequency 2 MB cache, 2 cores, 2 threads Intel® HD Graphics 610 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Celeron® G3930T Processor</a> 35W 2.7 GHz Base Frequency 2 MB cache, 2 cores, 2 threads Intel® HD Graphics 610 Supports DDR4 memory up to 2133 MT/s data rate	X			
<a href="#">Intel® Celeron® G3950 Processor</a> 51W 3.0 GHz Base Frequency 2 MB cache, 2 cores, 2 threads Intel® HD Graphics 610 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X

Intel® 6th Generation Core i7 Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Core i7-6700 Processor</a> 65W Up to 4.0 GHz Max. Turbo Frequency (3.4 GHz base frequency) 8 MB cache, 4 cores, 8 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Core i7-6700T Processor</a> 35W Up to 3.6 GHz Max. Turbo Frequency (2.8 GHz base frequency) 8 MB cache, 4 cores, 8 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate	X			

Intel® 6th Generation Core i5 Processors	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Core i5-6500 Processor</a> 65W Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Core i5-6600T Processor</a> 35W Up to 3.5 GHz Max. Turbo Frequency (2.7 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate	X			



### Overview

<a href="#">Intel® Core i5-6500T Processor</a> 35W Up to 3.1 GHz Max. Turbo Frequency (2.5 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate	X			
--	---	--	--	--

### Intel® 6th Generation Core i3 Processors

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Core i3-6100 Processor</a> 51W 3.7 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Core i3-6100T Processor</a> 35W 3.2 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate	X			

### Intel® 6th Generation Pentium® Processors

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Pentium® G4500 Processor</a> 51W 3.5 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel® HD Graphics 530 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Pentium® G4400 Processor</a> 54W 3.3 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel® HD Graphics 510 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X
<a href="#">Intel® Pentium® G4400T Processor</a> 35W 2.9 GHz Base Frequency 3 MB cache, 2 cores, 2 threads Intel® HD Graphics 510 Supports DDR4 memory up to 2133 MT/s data rate	X			

### Intel® 6th Generation Celeron® Processors

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
<a href="#">Intel® Celeron® G3900 Processor</a> 51W 2.8 GHz Base Frequency 2 MB cache, 2 cores, 2 threads Intel® HD Graphics 510 Supports DDR4 memory up to 2133 MT/s data rate		X	X	X

Overview

<u>Intel® Celeron® G3900T Processor</u> 35W 2.6 GHz Base Frequency 2 MB cache, 2 cores, 2 threads Intel® HD Graphics 510 Supports DDR4 memory up to 2133 MT/s data rate	X			
--	---	--	--	--

Standard Features and Configurable Components

MEMORY\*

Form Factor	Type	Maximum
400 G3 DM	DDR4-2400 (Transfer rates up to 2400 MT/s)	32 GB
400 G4 SFF	DDR4-2400 (Transfer rates up to 2400 MT/s)	32 GB
400 G4 MT	DDR4-2400 (Transfer rates up to 2400 MT/s)	32 GB
480 G4 MT	DDR4-2400 (Transfer rates up to 2400 MT/s)	32 GB

Both slots are customer accessible / upgradeable.

- 2,048 MB (2048 MB x 1)
- 4,096 MB (4096 MB x 1)
- 8,192 MB (8192 MB x 1)
- 16,384 MB (16,384 MB x 1)

\* Full availability of 4 GB or more of memory requires a 64-bit operating system. With Windows 32-bit operating systems, dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirement

Memory modules support data transfer rates up to 2400 MT/s; actual data rate is determined by the system's configured specifications for supported memory data rate.

STORAGE\*

2.5 inch 7.2k RPM Hard Disk Drives

	400 G3 DM	400 G4 SFF	400 G4
1TB SATA	X	X	X
500GB SATA	X	X	X

3.5" SATA 7.2k RPM Hard Disk Drives

	400 G3 DM	400 G4 SFF	400 G4
500GB 7200RPM 3.5in		X	X
1TB 7200RPM 3.5in		X	X
2TB 7200RPM 3.5in		X	X

2.5 inch Solid State Hybrid Drives (SSHD)

	400 G3 DM	400 G4 SFF	400 G4
1TB 5400RPM 2.5in 8GB Hybrid	X	X	X
500GB 5400RPM 2.5in 8GB Hybrid	X	X	X

3.5 inch Solid State Hybrid Drives (SSHD)

	400 G3 DM	400 G4 SFF	400 G4
1TB 7200RPM 3.5in SSHD (SSHD)		X	X

2.5 inch Self-encrypting Drives (SED HDD)

	400 G3 DM	400 G4 SFF	400 G4
500GB 7200RPM 2.5in SED OPAL2	X	X	X

2.5 inch Self-encrypting Drives (SED SSD)

	400 G3 DM	400 G4 SFF	400 G4
256GB TLC SED SSD Opal 2 Drive	X	X	X
512GB TLC SED SSD Opal 2 Drive	X	X	X

PCIe NVMe SSD Drives

	400 G3 DM	400 G4 SFF	400 G4
HP 256GB Turbo Drive G2 PCIe TLC SSD Drive	X	X	X



Standard Features and Configurable Components

HP 512GB Turbo Drive G2 PCIe TLC SSD Drive	X	X	X
HP 1TB Turbo Drive G2 PCIe TLC SSD Drive	X	X	X

2.5 SATA SSD Drives

	400 G3 DM	400 G4 SFF	400 G4 MT
HP SATA 128GB SSD Drive	X	X	X
HP SATA 256GB SSD Drive	X	X	X
HP 256GB TLC SSD Drive	X	X	X
HP 512GB TLC SSD Drive	X	X	X

\*For storage drives, GB = 1 billion bytes, TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30GB of system d software.

Optical Disc Drives

	400 G3 DM	400 G4 SFF	400 G4 MT
HP 9.5mm G3 800/600/400 SFF G4 400 Microtower DVD-Writer*		X	X
HP 9.5mm G3 800/600/400 SFF G4 400 Microtower DVD-ROM		X	X

\*HD-DVD discs cannot be played on this drive. No support for DVD-RAM. Actual speeds may vary. Don't copy copyright discs can store more data than single layer discs. Discs burned with this drive may not be compatible with many existin players.

Media Card Reader

	400 G3 DM	400 G4 SFF	400 G4 MT
(Optional)* SD4 with 5-in-1 Interface from SD option to PCA is USB (Supports SD, SDXC, SDHC, UHS-I, UHS-II)		X	X

\*Card sold separately

GRAPHICS

System Integrated Graphics

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Intel® HD Graphics 530 (integrated on 6 <sup>th</sup> gen Core i7/i5/i3 processors)	X	X	X	X
Intel® HD Graphics 630 (integrated on 7 <sup>th</sup> gen Core i7/i5/i3 processors and Pentium G4620, 4600, 4600T )	X	X	X	X
Intel® HD Graphics 610 (integrated on Pentium G4560, G4560T, Celeron G3950, G3930, G3930T)	X	X	X	X

Optional Discrete Graphics Solutions

(optional and RX 460 device must be configured at purchase)

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
AMD Radeon R7 450 4GB FH PCIe x16*			X	X
AMD Radeon RX 460 2GB FH PCIe x16*			X	X
NVIDIA® GeForce® GT730 1GB PCIe x8 HDMI		X	X	X
NVIDIA® GeForce® GT730 2GB PCIe x8 DP		X	X	X

\*Requires 310W chassis

2<sup>nd</sup> Graphics Cards

400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
-----------	------------	-----------	-----------



Standard Features and Configurable Components

AMD Radeon R7 450 4GB FH PCIe x16 G5 2nd**			X	X
NVIDIA® GeForce® GT730 1GB PCIe x8 HDMI 2nd***		X	X	X
NVIDIA® GeForce® GT730 2GB PCIe x8 DP 2nd****		X	X	X

\*\*Available only with AMD Radeon R7 450.  
\*\*\*Available only with NVIDIA® GeForce® GT730 1GB.  
\*\*\*\*Available only with NVIDIA® GeForce® GT730 2GB

AUDIO/MULTIMEDIA

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Conexant CX20632 Audio Codec	X	X	X	X
Headset* front connector (3.5mm)	X	X	X	X
Headphone front connector (3.5mm)	X			
Line-out and Line-In rear connectors* (3.5mm)		X	X	X
Multi-streaming capable**	X	X	X	X
Internal speaker (standard)	X	X	X	X

\*The DM, SFF, MT front headset connector supports CTIA style headsets. Headset connectors are retaskable to function as a Line-In, Microphone-In, Line-out or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally.  
\*\*Multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the separate connectors or internal speakers. This allows for different audio applications to use separate audio ports on the system. For example, the front connector could be used with a headset for a communications application while the rear connector is being used with external speakers and a multimedia application.

NETWORKING/COMMUNICATIONS\*

Ethernet (RJ-45) Integrated

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Realtek RTL8111 HSH GbE LOM Network Connection (standard)	X	X	X	X

Ethernet (RJ-45) Optional

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Intel® Ethernet I210-T1 PCIe x1 Gb Network Interface Card (optional)		X	X	X

Wireless LAN

(optional and all except for 7265 for SFF/TWR must be bought at purchase)

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Intel® 7265 802.11AC 2x2 Wi-Fi +Bluetooth® M.2 Combo Card non-VPro	X	X	X	X
Intel® 3168 802.11AC 2x2 Wi-Fi +Bluetooth® M.2 Combo Card non-VPro	X	X	X	X
Intel® 7260 802.11 a,b,g,n 2x2 M.2 Bluetooth® Disabled NIC**	X			

\* Wireless access point and Internet service required and not included. Availability of public wireless access points limited.  
\*\*Wake on Lan feature is not available.

SLOTS

### Standard Features and Configurable Components

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Turbo Drive (M.2 PCIe)	1 ea. M.2 PCIe x1-2230 (for WLAN)  1 ea. M.2 PCIe x4-2280/2230 (for storage)	1 ea. M.2 PCIe x1-2230 (for WLAN)	1 ea. M.2 PCIe x1-2230 (for WLAN)	1 ea. M.2 PCIe x1-2230 (for WLAN)
PCI Express x1 (v3.0)	N/A	N/A	1 ea. 4.2" full height 6.6" length 10W max. power	N/A
PCI Express x16 (v3.0) (wired as a x4)	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 35W max. power
PCI Express x16 (v3.0)	N/A	1 ea. 2.5" low profile 6.6" length 35W max. power	1 ea. 4.2" full height 6.6" length 75W max. power	1 ea. 4.2" full height 6.6" length 75W max. power
PCI	N/A	N/A	N/A	1 ea. 4.2" full height 6.6" length

## PORTS

### I/O Ports - Standard

	400 G3 DM	400 G4 SFF	400 G4 MT
USB 2.0	2 (rear)	4 (rear)	4 (rear)
USB 3.1 Gen1	2 (front) including 1 fast charging 2 (rear)	2 (front); 2 (rear)	2 (front); 2 (rear)
USB Type-C 3.0 port	N/A	N/A	N/A
PS/2	N/A	Optional (see I/O Ports Optional below)	Optional (see I/O Ports Optional below)
Video	1* DisplayPort  1* port (choice of DisplayPort, HDMI or VGA)	1 DisplayPort ; 1 VGA	1 DisplayPort 1 VGA
Audio	Front: 1 Headset 1 Headphone	Front: 1 Headset; Rear: 1 Audio-out 1 Audio-in	Front: 1 Headset; Rear: 1 Audio-out 1 Audio-in
Network Interface	RJ-45	RJ-45	RJ-45

### I/O Ports - Optional

	400 G3 DM	400 G4 SFF	400 G4 MT
Serial (RS-232)	1 standard; 1 optional*	N/A	1 (optional) (rear)
Serial (RS-232) and PS/2 combination	N/A	1 (optional)	1 (optional)



### Standard Features and Configurable Components

\*Replaces 1 of the optional video ports

#### I/O Ports — Internal ports

	400 G3 DM	400 G4 SFF	400 G4 MT	
DM SATA storage connector	1	N/A	N/A	
Internal SATA storage connector(s)	N/A	2	3	

### BAYS

	400 G3 DM	400 G4 SFF	400 G4 MT
5.25" Half Height ODD	N/A	N/A	N/A
9mm Slim ODD	N/A	1 ea.	1 ea.
Secure Digital (SD) 3 Reader	N/A	1 ea.	1 ea.
2.5" internal storage drive	1 ea.	1 ea.*	1 ea.*
3.5" internal storage drive	N/A	1 ea.*	2 ea.*

\*SFF can be configured with either (1) 3.5" or (1) 2.5" internal storage drive; MT can be configured with either (2) 3.5" or (1) storage drive.

### KEYBOARDS AND POINTING DEVICES

#### Keyboards

	400 G3 DM	400 G4 SFF
HP Conferencing Keyboard	X	X
HP USB PS/2 Washable Keyboard*	X	X
HP USB Business Slim CCID SmartCard Keyboard	X	X
HP USB Business Slim Keyboard	X	X
HP PS/2 Business Slim Keyboard		X
HP USB Business Slim Keyboard (China only)	X	X
HP USB Business Slim Grey Keyboard	X	X

#### Mice

	400 G3 DM	400 G4 SFF
HP PS/2 Mouse*		X
HP USB 1000dpi Laser Mouse	X	X
HP Grey V2 Mouse	X	X
HP USB Mouse	X	X
HP USB PS/2 Washable Mouse*	X	X
HP USB Mouse (China only)	X	X
HP USB Hardened Mouse	X	X

#### Combo

	400 G3 DM	400 G4 SFF
HP Wireless Business Slim Keyboard and Mouse*	X	X
HP USB Keyboard and Mouse (China only)	X	X

#### Other

	400 G3 DM	400 G4 SFF
HP Mouse Pad	X	X

\*Note Optional HP Internal Serial/PS/2 Ports is required to support this device.

### Standard Features and Configurable Components

## ADAPTERS AND CABLES

	400 G3 DM	400 G4 SFF
HP DisplayPort Cable	X	X
HP DisplayPort to DVI-D Adapter	X	X
HP DisplayPort to HDMI 4K Adapter	X	X
HP DisplayPort to VGA Adapter	X	X
HP DVI Cable	X	X
HP 700mm DisplayPort Cable Kit	X	
HP USB to Serial Port Adapter	X	

## I/O Devices

Optional Ports (only one can be chosen) must be configured at purchase except for PCIe x1 card

	DM	SFF	MT
HP DisplayPort Port	X	X	X
HP HDMI Port	X		
HP VGA Port	X	X	X
HP Internal Serial Port	X		X
HP Internal Serial/PS/2 Ports		X	X
HP PCIe x1 Parallel Port Card		X	X

## DUST FILTERS

	DM	SFF	MT
G3 600 SFF/ G4 SFF Dust Filter		X	
HP G3 Mini Dust Filter	X		
G4 400 MT Dust Filter			X

## Desktop Mini Accessories (optional)

	DM	SFF	MT
HP Desktop Mini DVD-Writer ODD Expansion Module	X		
HP Desktop Mini 500GB HDD/ I/O Expansion Module	X		
HP Desktop Mini I/O Expansion Module	X		
HP Desktop Mini Security/Dual VESA Sleeve	X		
HP DM VESA Power Supply Holder	X		
HP DM VESA Quick Deploy Adhesive	X		
HP Desktop Mini Vertical Chassis Stand	X		
HP Desktop Mini Port Cover Kit	X		
HP Quick Release Bracket	X		
HP DM Antenna/Wiring WLAN Kit	X		

## SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

## Standard Features and Configurable Components

### BIOS

HP BIOSphere Gen3<sup>1</sup>  
HP DriveLock | HP Automatic DriveLock  
BIOS Update via Network  
Master Boot Record Security  
Power On Authentication  
Secure Erase<sup>2</sup>  
Absolute Persistence Module<sup>3</sup>  
Pre-boot Authentication  
HP LAN-WLAN Protection  
HP Wireless Wakeup

### Multi Media

CyberLink Power Media Player (select models only)  
CyberLink Power2Go (select models only)

### Communication / Connectivity

Native Miracast Support<sup>4</sup>

### HP Value Add Software

HP ePrint Driver + JetAdvantage<sup>5</sup>  
HP Hotkey Support - CMIT  
HP Recovery Manager  
HP Recovery Disc Creator (Windows 7 only)  
HP Jumpstart  
HP Support Assistant  
HP Noise Cancellation Software  
HP Velocity  
HP Notifications

### 3rd Party

Foxit PhantomPDF Express for HP (Windows 7 only)

### Microsoft Products

Buy Office  
Bing Search  
Skype<sup>6</sup>

### Manageability

HP Driver Packs<sup>7</sup>  
HP SoftPaq Download Manager (SDM)  
HP System Software Manager (SSM)<sup>7</sup>  
HP BIOS Config Utility (BCU)<sup>8</sup>  
HP Client Catalog<sup>7</sup>  
HP Manageability & Integration Kit (MIK)<sup>7</sup>  
LANDESK Management<sup>8</sup>

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>

### Client Security Software

HP Client Security

- HP Security Manager (including Credential Manager and Password Manager)
- HP Drive Lock
- HP Password Manager
- Absolute Persistence Module
- Power On Authentication

Microsoft Security Essentials<sup>9</sup> (Windows 7 only)

### Standard Features and Configurable Components

Microsoft Defender  
HP WorkWise (requires Bluetooth®)<sup>10</sup>

#### Standard

Trusted Platform Module (TPM) 2.0 (Infineon SLB9670). Common Criteria EAL4+ Certified.

Downgradeable to TPM 1.2. Convertible to FIPS 140-2 Certified mode. (TPM 2.0 is not available for Win 7 32-bit.)

Restrictions apply; contact your account manager for more details.

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1 HP BIOSphere Gen 3 requires Intel® or AMD 7th generation processors.

2 For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

3 Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

4 Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>

5 Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see [www.hp.com/go/eprintcenter](http://www.hp.com/go/eprintcenter)). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

6 Skype is not offered in China.

7 Not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>

8 Subscription required.

9 Opt in and internet connection required for updates.

10 HP WorkWise smartphone app will soon be available as a free download on the App Store and Google Play. Requires Windows 10 Build 1607 or higher).

### HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP Pro 400 G3/G4 Business PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 14 languages.
- Update your BIOS via the cloud or standardize on a BIOS version hosted on Enterprise network.
- Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification 2.5
- Absolute Persistence agent - For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within Windows (HPBIOSUPDREC), HP Client Manager, and fail-safe recovery. In addition, the HP BIOS Configuration Utility enables replication of BIOS settings within Windows while the Replicated Setup feature provides the same capability within F10 setup. The BIOS Configuration Utility is available from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Standard Features and Configurable Components

Additional HP BIOS Features:

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Pro models use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 0.5W in S5 (when turned off). When S5 Max Power Savings feature is enabled below features are turned off:

- Power to slots
- Wake events other than power buttons (such as Wake on LAN)
- USB charging ports

HARDWARE SECURITY

- SATA 0,1 port disablement (via BIOS)
- Serial, USB enable/disable (via BIOS)
- Solenoid Lock / Hood Sensor (MT/SFF only)
- Hood Sensor for DM (integrated in the PCA, can be enabled/disabled through BIOS)
- Support for chassis padlocks and cable lock devices

POWER SUPPLY

	400 G3 DM	400 G4 SFF	400 G4 MT	
Standard Efficiency	65W 89% average efficiency at 115Vac & 230Vac			
80 PLUS Bronze	N/A	180W active PFC 82/85/82% efficient at 20/50/100% load(115V)	180W active PFC 82/85/82% efficient at 20/50/100% load(115V) 310W active PFC 82/85/82% efficient at 20/50/100% load(115V)	180W active PFC 82/85/82% efficient at 20/50/100% load(115V) 310W active PFC 82/85/82% efficient at 20/50/100% load(115V)
Operating Voltage Range	90 - 264VAC	90 - 264VAC	90 - 264VAC	90 - 264VAC
Rated Voltage Range	100 - 240VAC	100 - 240VAC	100 - 240VAC	100 - 240VAC
Rated Line Frequency	50 - 60HZ	50 - 60HZ	50 - 60HZ	50 - 60HZ
Operating Line Frequency	47 - 63HZ	47 - 63HZ	47 - 63HZ	47 - 63HZ
Rated Input Current	65W/1.6A90W/1.4A	180W/2.3A	180W/2.3A 310W/4A	180W/2.3A 310W/4A

### Standard Features and Configurable Components

Rated Input Current with Energy Efficient* Power Supply	90W/1.4A	180W/2.3A	180W/2.3A 310W/4A	180W/2.3A 310W/4A
DC Output	+19.5V	+12V	+12V	+12V
Current Leakage (NFPA 99: 2102)	Less than 500 micro amps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.  Less than 100 micro amps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.	Less than 500 micro amps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.  Less than 100 micro amps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.	Less than 500 micro amps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.  Less than 100 micro amps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.	Less than 500 micro amps of leakage current at 120 Vac with the ground wire disconnected, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.  Less than 100 micro amps of leakage current at 120 Vac with the ground wire intact with normal polarity, as required for Non-patient Electrical Appliances and Equipment used in a patient care facility or that contact patients in normal use. Per section 10.3.5.1.
Power Supply Fan	N/A	70mm variable speed	70mm variable speed	70mm variable speed
Power cord length	6.0 ft. (1.83 m) (Power cord only)	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)	6.0 ft. (1.83 m)
External Power Adapter				
Dimensions	55x30x114mm (60W)	N/A	N/A	N/A
Total Cord Length	6 ft	N/A	N/A	N/A

\*High efficiency power supply is a requirement for ENERGY STAR® certification in conjunction with a select range of process

## WEIGHTS & DIMENSIONS

(Configured with 2TB HDD, Wi-Fi card, graphics card)


	400 G3 DM	400 G4 SFF	400 G4 MT
<b>Chassis (W x H x D)</b> not including bezel	6.97 x 1.35 x 6.88 in 177 x 34.2 x 174.7 mm	10.6 x 3.7 x 11.7 in 270 x 95 x 296 mm	6.69 x 13.3 x 10.79 in 170 x 338 x 274 mm
<b>System Volume</b>	64 cu in 1.06 L	463 cu in 7.6 L	960 cu in 15.74 L
<b>System Weight*</b>	2.67 lb 1.21 kg	10.14 lb 4.6 kg	12.06 lb 5.47 kg
<b>Max Supported Weight</b> (desktop orientation)	N/A	77 lb 35 kg	77 lb 35 kg
<b>Packaging (H x W x D)</b>	5.7 x 9.1 x 19.6 in 144.8 x 231.1 x 497.8 mm	19.65 x 15.71 x 9.06 in 499 x 399 x 230 mm	19.65 x 15.35 x 11.73 in 499 x 390 x 298 mm



Standard Features and Configurable Components



Shipping Weight	6.1 lb 2.8 kg	15.59 lb. 7.08 kg	20.26 lb. 9.2 kg
Palletization Profile	20-units per layer 4 layer max 80-units per pallet Footprint-39.21 x 46.61 in (996 x 1184 mm)	6-units per layer 10 layer max 60 per pallet 47.24 x 39.37 x 94.49 in (including pallet)	6-units per layer 7 layer max 42 per pallet 47.24 x 39.37 x 86.85 in (including pallet)
	Dependent on 40-Ft Stnd. Sea Container or 40-Ft High-cube Sea Container is used)		

Desktop Mini Dimensions

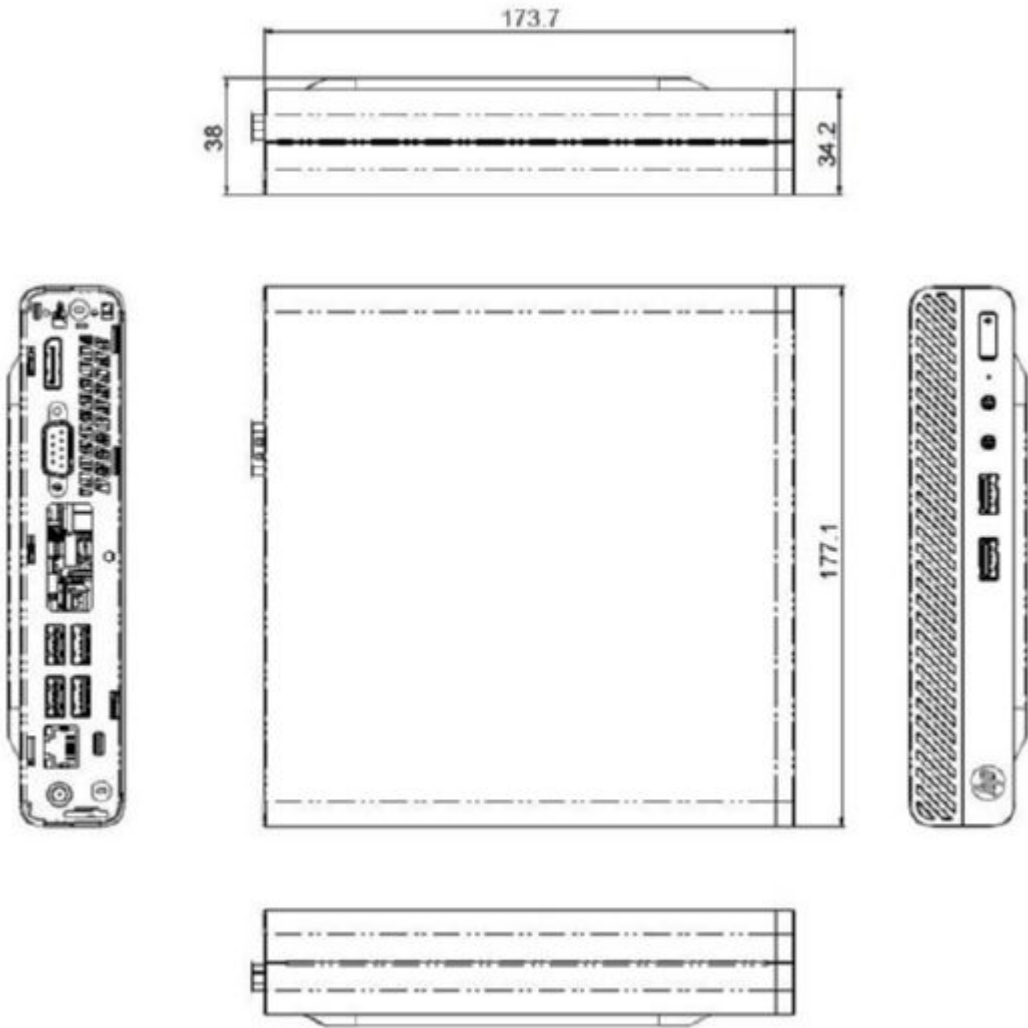


## Standard Features and Configurable Components

### Small Form Factor Dimensions

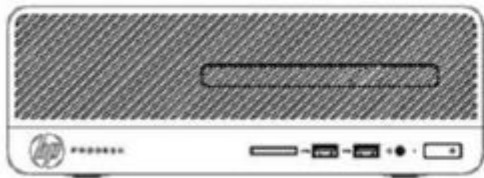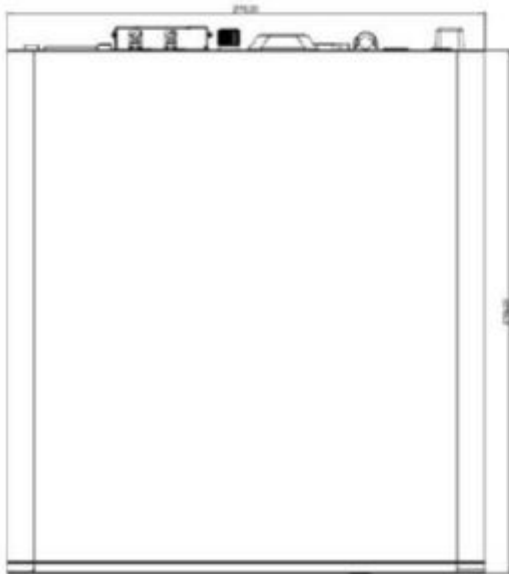

### Microtower Dimensions

Standard Features and Configurable Components

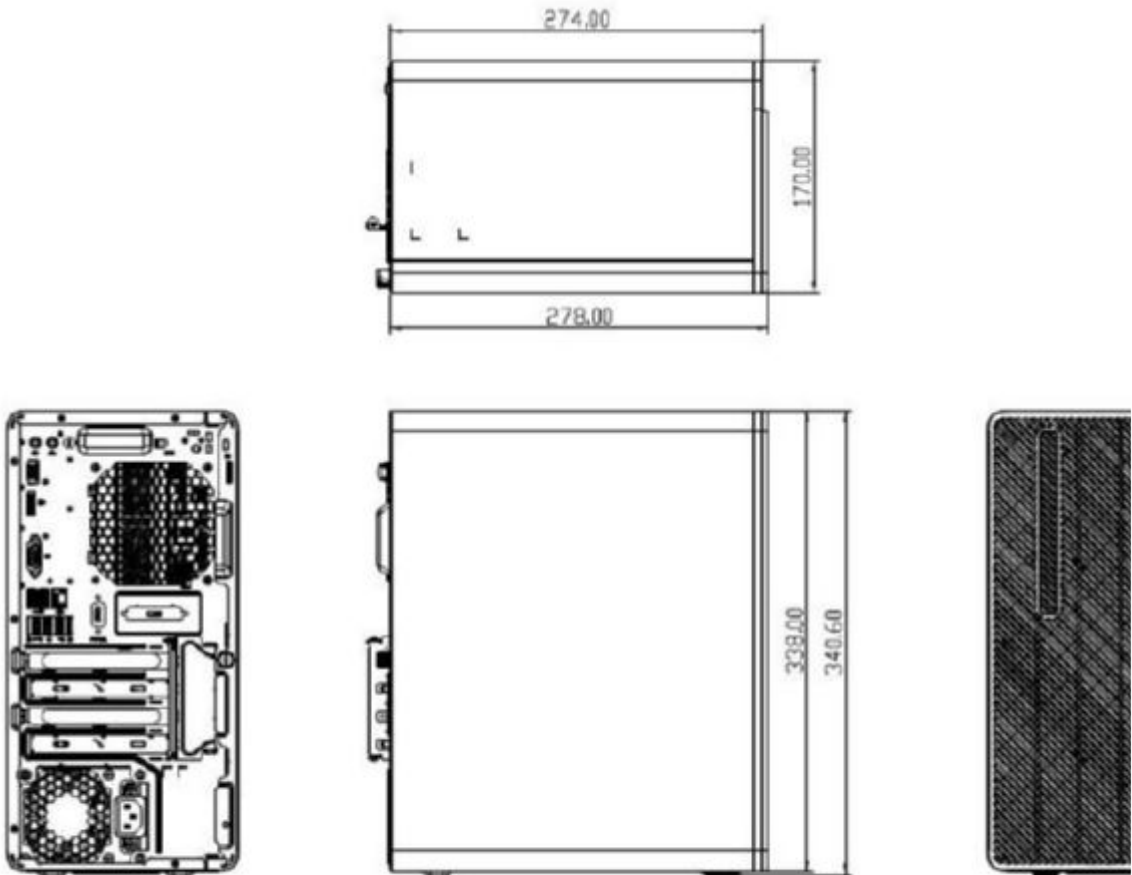

ENVIRONMENTAL & INDUSTRY

- ENERGY STAR® certified models available
- EPEAT® registered where applicable/supported. See <http://www.epeat.net> for registration status by country.
- TAA compliant models available

UNIT ENVIRONMENT AND OPERATING CONDITIONS

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 5000m Non-operating: 50000ft (15240 m)

\*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

SERVICE AND SUPPORT

On-site Warranty 1: Three-year (3-3-3) limited warranty delivers three years of on-site, next business day 2 service for parts and labor and complimentary limited technical support.3 Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing an optional HP Care Pack.4 To choose the right level of service for your HP product, visit HP Care Pack Central: [www.hp.com/go/cpc](http://www.hp.com/go/cpc)

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured and third-party HP qualified hardware and software.

NOTE 4: Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit [www.hp.com/go/cpc](http://www.hp.com/go/cpc). HP services are governed by the applicable HP terms and conditions of service provided or

## Technical Specifications – Environmental

indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

### Technical Specifications – Graphics

#### GRAPHICS

Intel® HD Graphics (integrated)					
DisplayPort	Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel)				
Memory	The BIOS has options for selecting the dedicated memory size of 128MB, 256MB or 512MB  Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.				
Maximum Graphics Memory	Microsoft Windows 7	Windows 8.1	Windows 10		
	Up to 1.7GB	Up to 1.8GB	>4 GB		
	Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.				
Maximum Color Depth	32 bits/pixel				
Graphics/Video API Support	<p>6th Generation Core processors:</p> <ul style="list-style-type: none"><li>• Next Generation Intel® Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience<ul style="list-style-type: none"><li>o Encode/transcode HD content</li><li>o Playback of high definition content including Blu-ray Disc</li><li>o Superior image quality with sharper, more colorful images</li></ul></li><li>• DirectX Video Acceleration (DXVA) support for accelerating video processing<ul style="list-style-type: none"><li>o Full AVC/VC1/MPEG2/HEVC HW Decode</li></ul></li><li>• Advanced Scheduler 2.0, 1.0</li><li>• Windows 7, Windows 8.1, Windows 10, Linux OS Support</li><li>• DirectX 12.1</li><li>• OpenGL 4.4</li><li>• Open CL 1.2 (Intel® HD Graphics 510)</li><li>• Open CL 1.2/2.0 (Intel® HD Graphics 530)</li></ul>				
<b>Supported Display Resolutions and Refresh Rates</b> Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. For All in One platforms, resolutions higher than the integrated panel resolution are not supported on the integrated panel.					



### Technical Specifications – Graphics

720 x 400	70	X	X	X	IBM VGA
800 x 600	60, 75, 85	X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85	X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85	X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85	X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85	X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85	X	X	X	VESA DMT
1280 x 960	60, 75, 85	X	X	X	VESA DMT
1280 x 1024	60, 75, 85	X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB	X	X	X	VESA DMT
1440 x 900	60, 60RB	X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85	X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75	X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60	X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85	X*	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85	X*	X	X	VESA DMT, 1.92M3
1920 x 1440	60, 75, 85		X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60,75		X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	CVT 3.69M9-R
2560 x 1600	60, 60RB		X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	50		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	60		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24		X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25		X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	30		X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	50		X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60		X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	SMPTE 274M
1920 x 1080	30		X	X	SMPTE 274M
1920 x 1080	24		X	X	SMPTE 274M
1280 x 720	60		X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	SMPTE 296M
720 x 480	60		X	X	MHL (CEA-770.2)
720 x 576	50		X	X	ITU-R BT.1358
640 x 480	60		X	X	CEA (VESA DMT)
* 60Hz refresh rate only on VGA					

Technical Specifications – Graphics

AMD Radeon R7 450 4GB PCIe x16 Graphics Card

- Memory4GB 128-bit wide frame buffer operating at 1125MHz.
- Controller Clock SpeedAMD® Radeon R9 350 GPU operating at 925 MHz
- Multi-display SupportA maximum of 4 displays are supported by the card. A maximum of 2 legacy displays (Native VGA, DVI, or displays connected with passive DisplayPort adapters are considered as legacy)
- Graphics /API supportDIRECTX 12, Open GL 4.3, Open CL1.2, UVD 3
- Output Connectors1 x Dual-Link DVI-I, 1x DisplayPort ; 1x HDMI; Includes DVI to VGA adapter

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rate*	VGA (DVI-VGA adapter)	DVI-D	DisplayPort	HDMI	Standard
640 x 480	60, 75, 85	X	X	X	X	VESA DMT, CVT 0.31M3
720 x 400	70	X	X	X	X	IBM VGA
800 x 600	60, 75, 85	X	X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85	X	X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85	X	X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85	X	X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85	X	X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85	X	X	X	X	VESA DMT
1280 x 960	60, 75, 85	X	X	X	X	VESA DMT
1280 x 1024	60, 75, 85	X	X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB	X	X	X	X	VESA DMT
1440 x 900	60, 60RB	X	X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85	X	X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75	X	X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60	X	X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85	X	X	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85	X	X	X	X	VESA DMT, 1.92M3

### Technical Specifications – Graphics

1920 x 1440	60, 75, 85	X	X	X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60,75	X	X	X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	X	CVT 3.69M9-R
2560 x 1600	60, 60RB		X	X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	50			X		CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	60			X		CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	30			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	50			X		CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60			X		CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	X	SMPTE 274M
1920 x 1080	30		X	X	X	SMPTE 274M
1920 x 1080	24		X	X	X	SMPTE 274M
1280 x 720	60		X	X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	X	SMPTE 296M
720 x 480	60		X	X	X	MHL (CEA-770.2)

### AMD Radeon RX 460 4GB FH PCIe x16 Graphics Card

<b>Memory</b>	2GB 128-bit wide frame buffer operating at 1750MHz.
<b>Controller Clock Speed</b>	AMD® Radeon RX 360 GPU operating at up to 1.2GHz
<b>Multi-display Support</b>	A maximum of 4 displays are supported by the card.
<b>Graphics /API support</b>	DIRECTX 12, Open GL 4.5, Open CL 2.0, AMD Video Coding Engine (VCE) 3.4 and AMD Universal Video Decoder( UVD)

### Technical Specifications – Graphics

#### Output Connectors

1 x Dual-Link DVI-D, 1x DisplayPort ; 1x HDMI

#### Supported Display Resolutions and Refresh Rates

**Note:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rate*		DVI-D	DisplayPort	HDMI	Standard
640 x 480	60, 75, 85		X	X	X	VESA DMT, CVT 0.31M3
720 x 400	70		X	X	X	IBM VGA
800 x 600	60, 75, 85		X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85		X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85		X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85		X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85		X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85		X	X	X	VESA DMT
1280 x 960	60, 75, 85		X	X	X	VESA DMT
1280 x 1024	60, 75, 85		X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB		X	X	X	VESA DMT
1440 x 900	60, 60RB		X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85		X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75		X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60		X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85		X	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85		X	X	X	VESA DMT, 1.92M3
1920 x 1440	60, 75, 85		X	X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60, 75		X	X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	X	CVT 3.69M9-R
2560 x 1600	60, 60 RB		X	X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	50			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M

Technical Specifications – Graphics

3840 x 2160	60			X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	30			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	50			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60			X	X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	X	SMPTE 274M
1920 x 1080	30		X	X	X	SMPTE 274M
1920 x 1080	24		X	X	X	SMPTE 274M
1280 x 720	60		X	X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	X	SMPTE 296M
720 x 480	60		X	X	X	MHL (CEA-770.2)

NVIDIA® GeForce® GT 730 1GB PCIe x8 HDMI Graphics Card

Memory	1GB GDDR5 64-bit wide frame buffer operating at 2.5GHz.
Controller Clock Speed	NVIDIA® Kepler GPU operating at 901 MHz
Multi-display Support	A maximum of 2 displays are supported by the card
Graphics /API support	Supports Microsoft DirectX 12, OpenGL 4.4 and OpenCL 2 API, Shade Model 5 and DirectCompute 11
Output Connectors	1 x Dual-Link DVI-I; 1x HDMI; Includes DVI to VGA adapter

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Refresh Rate*	VGA (DVI- VGA adapter)	DVI-D	HDMI	Standard
640 x 480	60, 75, 85	X	X	X	VESA DMT, CVT 0.31M3
720 x 400	70	X	X	X	IBM VGA
800 x 600	60, 75, 85	X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85	X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85	X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85	X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85	X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85	X	X	X	VESA DMT

### Technical Specifications – Graphics

1280 x 960	60, 75, 85	X	X	X	VESA DMT
1280 x 1024	60, 75, 85	X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB	X	X	X	VESA DMT
1440 x 900	60, 60RB	X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85	X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75	X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60	X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85	X	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85	X	X	X	VESA DMT, 1.92M3
1920 x 1440	60, 75, 85	X	X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60,75	X	X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	CVT 3.69M9-R
2560 x 1600	60, 60RB		X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	50				CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	60				CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	30			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	50				CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60				CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	SMPTE 274M
1920 x 1080	30		X	X	SMPTE 274M
1920 x 1080	24		X	X	SMPTE 274M
1280 x 720	60		X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	SMPTE 296M
720 x 480	60		X	X	MHL (CEA-770.2)

\* >60 refresh rates only for analog (VGA) signaling

### NVIDIA® GeForce® GT 730 2GB DP PCIe x8 Graphics Card

<b>Introduction</b>	Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x8 graphics add-in card based on the NVIDIA® Kepler Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing.
<b>Memory</b>	2GB GDDR5 64-bit wide frame buffer operating at 900 MHz
<b>Controller Clock Speed</b>	NVIDIA® Kepler GPU operating at 902 MHz



### Technical Specifications – Graphics

<b>Multi-display Support</b>		A maximum of 4 displays are supported by the card.			
<b>Graphics /API support</b>		Supports Microsoft DirectX 12, OpenGL 4.4 and OpenCL 2 APIs, Shade Model 5, UVD 4.2, VCE 2.0, and DirectCompute 11			
<b>Output Connectors</b>		1 x Dual-Link DVI-I, 1x DisplayPort ; Includes DVI to VGA adapter Display Port output is multi-mode capable, support Audio, HBR2 and MST			
Resolution	Refresh Rate*	VGA (DVI- VGA adapter)	DVI- D	DisplayPort	Standard
640 x 480	60, 75, 85	X	X	X	VESA DMT, CVT 0.31M3
720 x 400	70	X	X	X	IBM VGA
800 x 600	60, 75, 85	X	X	X	VESA DMT, CVT0.48M3
1024 x 768	60, 75, 85	X	X	X	VESA DMT, CVT 0.79M3
1152 x 864	60, 75, 85	X	X	X	VESA DMT, CVT 0.83MA
1280 x 720	60, 75, 85	X	X	X	VESA DMT, CVT 0.92M9, CEA-770.3
1280 x 768	60, 60RB, 75, 85	X	X	X	VESA DMT, CVT 0.98M9/0.98M9-R
1280 x 800	60, 75, 85	X	X	X	VESA DMT
1280 x 960	60, 75, 85	X	X	X	VESA DMT
1280 x 1024	60, 75, 85	X	X	X	VESA DMT, CVT 1.31M4
1366 x 768	60, 60RB	X	X	X	VESA DMT
1440 x 900	60, 60RB	X	X	X	VESA DMT
1600 x 900	60, 60RB, 75, 85	X	X	X	VESA DMT
1680 x 1050	60, 60RB, 75	X	X	X	VESA DMT, CVT 1.76MA/1.76MA-R
1920 x 1080	60	X	X	X	VESA DMT, CVT 2.07M9, SMPTE 274M
1920 x 1200	60, 60RB, 75, 85	X	X	X	DMT, CVT 2.30MA/2.30MA-R
1600 x 1200	60, 75, 85	X	X	X	VESA DMT, 1.92M3
1920 x 1440	60, 75, 85	X	X	X	VESA DMT, CVT 2.76M3
2048 x 1536	60,75	X	X	X	CVT 3.15M3
2560 x 1440	59.951		X	X	CVT 3.69M9-R
2560 x 1600	60, 60RB		X	X	VESA DMT, CVT 4.10MA/4.10MA-R
3840 x 2160	24			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	25			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	30		X	X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
3840 x 2160	60			X	CVT-RBv1/v2 (8.29M9-R), SMPTE 274M
4096 x 2160	24			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	25			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M

Technical Specifications – Graphics

4096 x 2160	30			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
4096 x 2160	60			X	CVT-RBv1/v2 (8.85M-R), SMPTE 274M
1920 x 1080	60		X	X	VESA (SMPTE 274M)
1920 x 1080	50		X	X	SMPTE 274M
1920 x 1080	30		X	X	SMPTE 274M
1920 x 1080	24		X	X	SMPTE 274M
1280 x 720	60		X	X	VESA (CEA-770.3)
1280 x 720	50		X	X	SMPTE 296M
720 x 480	60		X	X	MHL (CEA-770.2)
720 x 576	50		X	X	ITU-R BT.1358
640 x 480	60		X	X	CEA (VESA DMT)
* >60 refresh rates only for analog (VGA) signaling					

Technical Specifications – Hard Disk and Solid State Storage

HARD DISK AND SOLID STORAGE

**NOTE:** For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.

HP 1 TB 7.2K SATA 6.0Gb/s 2.5" Hard Disk Drive		
Capacity	1,000,204,886,016 bytes	
Rotational Speed	7,200 rpm	
Interface	SATA 6 Gb/s	
Buffer Size	32 MB	
Logical Blocks	1,953,525,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	12 ms
	Full-Stroke:	25 ms
Height (nominal)	0.374 in/9.5 mm	
Width (nominal)	Media diameter: 2.5 in/63.5 mm	
	Physical size: 2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.		

Technical Specifications – Hard Disk and Solid State Storage

HP 500 GB 7.2K SATA 6.0Gb/s 2.5" Hard Disk Drive*		
Capacity	500,107,862,016 bytes	
Rotational Speed	7,200 rpm	
Interface	SATA 6 Gb/s	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track:	2.0 ms
	Average:	12 ms
	Full-Stroke:	25 ms
Height (nominal)	0.267 in/6.8 mm	
Width (nominal)	Media diameter: 2.5 in/63.5 mm	
	Physical size: 2.75 in/70 mm	
Operating Temperature	41° to 131° F (5° to 55° C)	
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.		

500GB* 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive		
Formatted Capacity	500,107,862,016 bytes	
Spindle Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	16 MB	
Logical Blocks	976,773,168	
Seek Time (average)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.		

Technical Specifications – Hard Disk and Solid State Storage

HP 1 TB* 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive*		
Formatted Capacity	1,000,204,886,016 bytes	
Rotational Speed	7,200 rpm	
Interface	Serial ATA 3.0 (6.0 Gb/s)	
Buffer Size	32 MB	
Logical Blocks	1,953,525,168	
Seek Time (average)	Single Track:	2.0 ms
	Average:	11 ms
	Full-Stroke:	21 ms
Height (nominal)	1 in/2.54 cm	
Width (nominal)	Media diameter: 3.5 in/8.89 cm	
	Physical size: 4 in/10.2 cm	
Operating Temperature	41° to 131° F (5° to 55° C)	
* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.		

HP 2 TB* 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive*		
Formatted Capacity	2 TB	
Rotational Speed	7,200 rpm	
Interface	SATA 6Gb/s NCQ	
Cache, Multisegmented (MB)	64 MB	
Seek Time (average)	Read	<8.5 ms
	Write	<9.5 ms
Height	1.028 in/26.11 mm	
Width	4.0 in/101.6 mm	
Depth	5.787 in/146.99 mm	
Weight	1.38 lb/626 g	
Operating Temperature	32° to 140° F (0° to 60° C)	
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		

Technical Specifications – Hard Disk and Solid State Storage

HP 1 TB* SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)*		
Formatted Capacity	1 TB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	SATA 6 Gb/s	
Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
Height	0.374 +/- .008 in (9.5 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	
Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)	
Weight	0.254 lb/115 g (max)	
Operating Temperature	32° to 140° F (0° to 60° C)	
* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		

HP 500 GB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD)*		
Formatted Capacity	500 GB	
Spindle Speed	5,400 rpm +/- 0.2%	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	SATA 6 Gb/s	
Cache Buffer	64 MB	
NAND Flash Commercial Multilevel Cell (cMLC)	8 GB	
Number of Sectors	976,773,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	12 ms
Height	0.268 +/- .008 in (6.8 +/- 0.2 mm)	
Width	2.750 +/- 0.010 in (69.85 +/- 0.25 mm)	

Technical Specifications – Hard Disk and Solid State Storage

Length	3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm)
Weight	0.209 lb/95 g (max)
Operating Temperature	41° to 131° F (5° to 55° C)
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.	

HP 1-TB SATA 6G 3.5" 8GB Solid State Hybrid Drive (SSHD)*		
Formatted Capacity	1 TB	
Spindle Speed	7,200 rpm	
Drive Type	Solid State Hybrid Drive (SSHD) technology with NAND Flash	
Interface	Serial ATA (SATA)	
Cache Buffer	64 MB	
NAND Flash Multilevel Cell (MLC)	8 GB	
Number of Sectors	1,953,525,168	
Seek Time (typical reads)	Single Track:	2.0 ms
	Average:	11 ms
Height	0.783 in / 2.01 cm	
Width	4 in / 10.2 cm	
Length	5.79 in / 14.7 cm	
Weight	0.88 lb/400 g	
Operating Temperature	41° to 131° F (5° to 55° C)	
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		

Technical Specifications – Hard Disk and Solid State Storage

500 GB* SATA 2.5" Self-Encrypting (SED) Opal 2 Solid State Drive*		
Unformatted Capacity	500GB	
Architecture	Self-Encrypting (SED) Solid State Drive with 25nm MLC NAND Flash and SATA interface	
Interface	Serial ATA 2.0 (3.0 Gb/s)	
NAND Flash	25nm MLC NAND Flash	
Height	.275 in/7mm	
Width	2.75 in/69.85 mm	
Length	3.95 in/100.5 mm	
Weight	0.161 lb (73 g)	
Bandwidth Performance	Sustained Sequential 128k Read:	Up to 450 MB/s
	Sustained Sequential 128k Write:	Up to 260 MB/s
	Random 4k Read:	Up to 46K IOPs
	Random 4k Write:	Up to 56K IOPs
Latency	Read:	55 µs
	Write:	55 µs
Power	SATA power consumption:	160 mW (active average); <85 mW (idle average)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	
	Operating Temperature:	32° to 158° F (0° to 70° C)
Environmental (all conditions, non-condensing)	Relative Humidity:	5% to 95%
	Shock:	1,500 G/1 ms
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		



Technical Specifications – Hard Disk and Solid State Storage

256 GB SATA 2.5" TLC SED SSD Opal 2 Drive*		
Unformatted Capacity	256 GB 500,118,192 (User Addressable Sectors)	
Architecture	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Trusted Computing Group (TCG) OPAL 2.0 compliant encrypted solid state drive	
Interface	Serial ATA (6.0 Gb/s)	
Form Factor	2.5 inch	
Height	6.80 mm ± 0.20	
Width	69.85 mm ± 0.25	
Length	100.20 mm ± 0.25	
Typical Weight	37.4 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 520 MB/s
	Sustained Sequential Write:	Up to 460 MB/s
Power	Power consumption:	Active: 3.891W; Idle: 0.085W
Mean Time Between Failure (MTBF)	1,500,000 hours	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		



Technical Specifications – Hard Disk and Solid State Storage

512 GB SATA 2.5" TLC SED SSD Opal 2 Drive*		
Unformatted Capacity	512 GB 1,000,215,216 (User Addressable Sectors)	
Architecture	Self-Encrypting (SED) Solid State Drive with NAND Flash and SATA interface. Trusted Computing Group (TCG) OPAL 2.0 compliant encrypted solid state drive	
Interface	Serial ATA (6.0 Gb/s)	
Form Factor	2.5 inch	
Height	7 mm ± 0.20	
Width	69.85 mm ± 0.25	
Length	100.20 mm ± 0.25	
Typical Weight	37.4 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 515 MB/s
	Sustained Sequential Write:	Up to 490 MB/s
Power	Power consumption:	Maximum active power: ≤4,400mW Average power: 70mW Slumber low power mode: 42mW - 52mW
Mean Time Between Failure (MTBF)	Up to 1,750,000 hours	
Environmental (all conditions, non-condensing)	Operating Temperature:	0°C to 70°C (32°F to 158°F)
	Non-operating temperature and storage	-55°C to +85°C (-67°F to 185°F)
	Operating and non-operating shock	1,500 G/0.5 ms
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8.1/10) of system disk is reserved for the system recovery software.		

Technical Specifications – Hard Disk and Solid State Storage

256GB Turbo Drive G2 TLC Solid State Drive		
Unformatted Capacity	256 GB	
Architecture	Solid State Drive with TLC NAND Flash and PCIE interface. Complies with NVMe Standard Power Saving Modes: L1 substates support Multi Queue support	
Interface	PCI-E Gen3 x 4	
Form Factor	M.2 2280	
Height	3.73 mm	
Width	22.00 ± 0.15 mm	
Length	80.00 ± 0.15 mm	
Weight	Up to 8 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 2600 MB/s
	Sustained Sequential Write:	Up to 1000 MB/s
Power	Power consumption:	Active: Typical 6.1W; Idle: Typical 80mW L1.2: Typical 5mW
Mean Time Between Failure (MTBF)	1,500,000 hours	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms



Technical Specifications – Hard Disk and Solid State Storage

512GB Turbo Drive G2 TLC Solid State Drive		
Unformatted Capacity	512 GB	
Architecture	Solid State Drive with TLC NAND Flash and PCIE interface. Complies with NVMe Standard Power Saving Modes: L1 substates support Multi Queue support	
Interface	PCI-E Gen3 x 4	
Form Factor	M.2 2280	
Height	3.73 mm	
Width	22.00 ± 0.15 mm	
Length	80.00 ± 0.15 mm	
Weight	Up to 8 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 2600 MB/s
	Sustained Sequential Write:	Up to 1200 MB/s
Power	Power consumption:	Active: Typical 6.1W; Idle: Typical 80mW L1.2: Typical 5mW
Mean Time Between Failure (MTBF)	1,500,000 hours	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms

Technical Specifications – Hard Disk and Solid State Storage

1TB Turbo Drive G2 TLC Solid State Drive		
Unformatted Capacity	1 TB	
Architecture	Solid State Drive with TLC NAND Flash and PCIE interface. Complies with NVMe Standard Power Saving Modes: L1 substates support Multi Queue support	
Interface	PCI-E Gen3 x 4	
Form Factor	M.2 2280	
Height	3.73 mm	
Width	22.00 ± 0.15 mm	
Length	80.00 ± 0.15 mm	
Weight	Up to 8 g	
Bandwidth Performance	Sustained Sequential Read:	Up to 2600 MB/s
	Sustained Sequential Write:	Up to 1400 MB/s
Power	Power consumption:	Active: Typical 6.1W; Idle: Typical 80mW L1.2: Typical 5mW
Mean Time Between Failure (MTBF)	1,500,000 hours	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms



Technical Specifications – Hard Disk and Solid State Storage

128GB SATA 2.5" Value (Non-SED) Solid State Drive		
Unformatted Capacity	128 GB	
Architecture	TLC NAND Flash	
Interface	SATA 3.2 (6.0 Gb/s)	
Form Factor	2.5 inch	
Dimensions (W x H x D)	6.98 x 0.7 x 10.05 cm	
Weight	31g	
Bandwidth Performance	Sustained Sequential Read:	Up to 510 MB/s
	Sustained Sequential Write:	Up to 330 MB/s
	Random Read:	Up to 38K IOPs
	Random Write:	Up to 70K IOPs
Power	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	50mW (active); 20mW (idle)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms
NOTE: "For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software."		

Technical Specifications – Hard Disk and Solid State Storage

256GB SATA 2.5" Value (Non-SED) Solid State Drive		
Unformatted Capacity	256 GB	
Architecture	TLC NAND Flash	
Interface	SATA 3.2 (6.0 Gb/s)	
Form Factor	2.5 inch	
Dimensions (W x H x D)	6.98 x 0.7 x 10.05 cm	
Weight	31g	
Bandwidth Performance	Sustained Sequential Read:	Up to 510 MB/s
	Sustained Sequential Write:	Up to 330 MB/s
	Random Read:	Up to 38K IOPs
	Random Write:	Up to 70K IOPs
Power	DC power requirement:	5 VDC 5%-100 mV ripple p-p
	Total power consumption:	50mW (active); 20mW (idle)
Useful Drive Life	72TB written, up to 40GB/day for 5 years	
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock:	1,500 G/0.5 ms
NOTE: "For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software."		

Technical Specifications – Hard Disk and Solid State Storage

256GB SATA 2.5" TLC Solid State Drive		
Formatted Capacity	256 GB	
Architecture	Solid State Drive with SATA interface; ATA 8 Compliant and SATA 2.6 compliant	
Interface	Serial ATA 3 (6.0 Gb/s)	
Form Factor	2.5 inch	
Height	7 mm ± 0.20	
Width	69.85 mm ± 0.25	
Length	100.2 mm ± 0.25	
Weight (typical)	36.5 g (+2)	
Data Transfer Rate (128k Sequential )	Sequential Read	Up to 500 MB/s
	Sequential Write	Up to 455 MB/s
Power Watts	Power consumption (avg):	Read: 95 mW Write: 95 mW Standby: 70 mW DEVSLP: <7 mW
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock (2 m Sec half-sine):	1500 G peak 0.5ms (operating)

512 GB SATA 2.5" TLC Solid State Drive*	
Formatted Capacity	512 GB
Architecture	Solid State Drive with SATA interface; ATA 8 Compliant and SATA 2.6 compliant
Interface	Serial ATA 3 (6.0 Gb/s)
Form Factor	2.5 inch
Height	7 mm ± 0.20
Width	69.85 mm ± 0.25
Length	100.2 mm ± 0.25
Weight (typical)	36.5 g (+2)



Technical Specifications – Hard Disk and Solid State Storage

Data Transfer Rate (128k Sequential )	Sequential Read	Up to 500 MB/s
	Sequential Write	Up to 455 MB/s
Power Watts	Power consumption (avg):	Read: 95 mW Write: 95 mW Standby: 70 mW DEVSLP: <7 mW
Environmental (all conditions, non-condensing)	Operating Temperature:	32° to 158° F (0° to 70° C)
	Relative Humidity:	5% to 95%
	Shock (2 m Sec half-sine):	1500 G peak 0.5ms (operating)
*NOTE: For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.		

### Technical Specifications - Removable Storage

#### OPTICAL DRIVES

HP 9.5mm G3 800/600/400 SFF G4 400 SFF/MT DVD-Writer		
Height	12.7mm height	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	0.42 lb (190 g)	
Write speeds	DVD-R DL	Up to 6X
	DVD+R	Up to 8X
	DVD+RW	Up to 8X
	DVD+R DL	Up to 6X
	DVD-R	Up to 8X
	DVD-RW	Up to 6X
	CD-R	Up to 24X
	CD-RW	Up to 24X
Read speeds	DVD-RW, DVD+RW	Up to 8X
	DVD-R DL, DVD+R DL	Up to 8X
	DVD+R, DVD-R	Up to 8X
	DVD-ROM DL, DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
Access time (typical reads, including settling)	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
	Stop Time	6 seconds (typical)
	Source	Slimline SATA DC power receptacle
Power	DC Power Requirement	5 VDC $\pm$ 5%-100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum)
	Temperature	41° to 122° F (5° to 50° C)
Environmental conditions (operating - non-condensing)	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)

Technical Specifications - Removable Storage

HP 9.5mm G3 800/600/400 SFF G4 400 SFF/MT DVD-ROM		
Height	12.7mm	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Dimensions (W x H x D)	5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel	
Weight (max)	Up to 0.37 lb (170 g) without bezel	
Read speeds	DVD+R/-R/+RW/ -RW/+R DL /-R DL	Up to 8X
	DVD-ROM	Up to 8X
	CD-ROM, CD-R	Up to 24X
	CD-RW	Up to 24X
Access time (typical reads, including settling)	Random	DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical)
	Full Stroke	DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical)
Power	Source	Slimline SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature (operating)	84° F (29° C)

System Memory Support

The HP ProDesk 400 Business PC supports the 6<sup>th</sup> & 7<sup>th</sup> generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). The 6<sup>th</sup> generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR4 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR4 unbuffered dual in-line memory modules (DIMM) or DDR4 unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 2400 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR4 system memory I/O voltage of 1.2V


Platform Memory Support

- The Microtower (MT) and Small Form Factor (SFF) platform supports up to two (2) industry-standard DDR4-SDRAM DIMMs.
- The DM platform supports up to two (2) industry-standard DDR4-SDRAM SO-DIMMs.

**CAUTION:** You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

**NOTE:** For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Networking

Realtek RTL8111HSH-CG GbE		
10/100/1000 NIC	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	Power Management	ACPI compliant - multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot
<div><div></div><div>DA - 15827 Worldwide QuickSpecs — Version 1 — 1.26.2017</div><div>Page 52</div></div>		

Technical Specifications – Networking

		Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	Interface	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
	NIC Device Driver Name	PCIe GBE Ethernet Family Controller

Intel® Ethernet I210-T1 Gigabit Network Adapter	
Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel® I210 Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3AB 802.3u 802.3x flow control
Bus architecture	PCI-E 2.1
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV-c, TUVus Mark Canada and United States, TUV-GS Mark for European Union
Power requirement	Aux 3.3 V, 3.0 Watts in 1000 base-T and 1.0 Watts in 100 Base-T
Boot ROM support	Yes 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps
Network transfer rate	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI bus)

### Technical Specifications – Networking

<b>Environmental</b>	Operating Temperature:	32° to 132° F (0° to 55° C )
	Operating Humidity:	85% at 131° F (55° C)
<b>Management</b>	WOL, PXE, DMI, WFM 2.0	

### Intel® 7265 802.11ac 2x2 DualBand Combo PCIe x1 Card

	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	<b>Interoperability</b>	Wi-Fi certified
	<b>Frequency Band</b>	802.11b/g/n <ul style="list-style-type: none"> <li>2.402 - 2.482 GHz</li> </ul> <p>Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.</p> 802.11a/n <ul style="list-style-type: none"> <li>4.9 - 4.95 GHz (Japan)</li> <li>5.15 - 5.25 GHz</li> <li>5.25 - 5.35 GHz</li> <li>5.47 - 5.725 GHz</li> <li>5.825 - 5.850 GHz</li> </ul> <p>Note: Indonesia no support this band)</p>
	<b>Data Rates</b>	<ul style="list-style-type: none"> <li>802.11b: 1, 2, 5.5, 11 Mbps</li> <li>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)</li> </ul>
	<b>Modulation</b>	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
	<b>Security<sup>1</sup></b>	<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
	<b>Output Power<sup>2</sup></b>	<ul style="list-style-type: none"> <li>802.11b : +16dBm minimum</li> <li>802.11g : +14dBm minimum</li> <li>802.11a : +14dBm minimum</li> <li>802.11n HT20(2.4GHz) : +13dBm minimum</li> <li>802.11n HT40(2.4GHz) : +13dBm minimum</li> </ul>
		<ul style="list-style-type: none"> <li></li> </ul>

### Technical Specifications – Networking

	<ul style="list-style-type: none"><li>• 802.11n HT20(5GHz) : +12dBm minimum</li><li>• 802.11n HT40(5GHz) : +12dBm minimum</li><li>• 802.11ac 80MHz(5GHz) : +11dBm minimum</li></ul>	
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 60 mW (WLAN unassociated) Radio disabled: 30 mW	
<b>Power Management</b>	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
<b>Receiver Sensitivity<sup>3</sup></b>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -86dBm maximum 802.11a, 54Mbps : -72dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum	
<b>Antenna type</b>	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth® communications	
<b>Form Factor</b>	PCI-Express M.2 MiniCard	
<b>Dimensions</b>	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
<b>Weight</b>	Type 2230 : 2.8g Or Type 1630 : 2g	
<b>Operating Voltage</b>	3.3v +/- 9%	
<b>Temperature</b>	Operating Non-operating	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
<b>Altitude</b>	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
	<b>LED Activity</b>	LED Amber - Radio OFF; LED White - Radio ON
	<ol style="list-style-type: none"><li>1. Check latest software/driver release for updates on supported security features.</li><li>2. Maximum output power may vary by country according to local regulations.</li><li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li></ol>	
	<b>HP Integrated Module with Bluetooth® 4.2 Wireless Technology</b>	
	<b>Bluetooth® Specification</b>	4.2 Compliant
	<b>Frequency Band</b>	2402 to 2480 MHz
	<b>Number of Available Channels</b>	79 (1 MHz) available channels
	<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric

### Technical Specifications – Networking

<b>Transmit Power</b>	The Bluetooth® component shall operate as a Class II Bluetooth® device with a maximum transmit power of +4 dBm for BR and EDR.		
<b>Receiver Sensitivity</b>	<b>Modulation</b>	<b>0.01% BER</b>	<b>0.001% BER</b>
	GFSK	-80 dBm	-70 dBm
	π/4-DQPSK	-80 dBm	-70 dBm
	8DPSK	-80 dBm	-70 dBm
<b>Power Consumption</b>	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW		
<b>Range</b>	Up to 33 ft (10 m)		
<b>Electrical Interface</b>	USB 2.0 compliant		
<b>Bluetooth® Software Supported Link Topology</b>	Microsoft Windows Bluetooth® Software		
<b>Electrical Interface</b>	Point to Point, Multipoint Pico Nets up to 7 slaves		
<b>Bluetooth® Software Supported Security</b>	Full support of Bluetooth® Security Provisions		
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support		
<b>Power Management Certifications</b>	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff		
<b>Security</b>	All necessary regulatory approvals for supported countries, including:		
<b>Certifications</b>	FCC (47 CFR) Part 15C, Section 15.247 & 15.249		
<b>Bluetooth® Profiles Supported</b>			
<b>Power Management Certifications</b>	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950		
<b>Certifications</b> <b>Bluetooth® Profiles Supported</b>	UL, CSA, and CE Mark		
	Serial Port Profile (SPP) <sup>1</sup>		
	Service Discovery Application Profile (SDAP)		
	Dial-Up Networking (DUN) <sup>1,2</sup>		
	Generic Object Exchange Profile (GOEP) <sup>1,2</sup>		
	Object Push Profile (OPP) <sup>1,2</sup>		
	File Transfer Profile (FTP)		
	Synchronization Profile (SYNC)		
	Hard Copy Cable Replacement (HCRP) <sup>1,2</sup>		
	Personal Area Networking Profile (PAN) <sup>1,2</sup>		
	Human Interface Device Profile (HID) <sup>1,2</sup>		
	FAX Profile (FAX)		
	Basic Imaging Profile (BIP) <sup>2</sup>		
	Headset Profile (HSP)		
	Hands Free Profile (HFP)		
	Advanced Audio Distribution Profile (A2DP)		

### Intel® 3168 802.11ac with PCIe x1 WLAN/ Bluetooth® Combo\*

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
<b>Interoperability</b>	Wi-Fi certification



### Technical Specifications – Networking

Frequency Bands	802.11b/g/n	2.402 - 2.482 GHz  <b>Note:</b> The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels.
	802.11a/n	4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz <b>Note:</b> Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)
Data Rates	<ul style="list-style-type: none"> <li>802.11b: 1, 2, 5.5, 11 Mbps</li> <li>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</li> <li>802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz)</li> <li>802.11ac : MCS0 ~ MCS7, (1SS) (20MHz, 40MHz, and 80MHz)</li> </ul>	
Modulation	Direct Sequence Spread Spectrum  BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM	
Security <sup>1</sup>	<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only</li> <li>AES-CCMP: 128 bit in hardware</li> <li>802.1x authentication</li> <li>WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through CCX4 and CCX Lite</li> <li>WAPI</li> </ul>	
	<sup>1</sup> Check latest software/driver release for updates on supported security features.	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	802.11r Fast Roaming	
Output Power <sup>2</sup>	<ul style="list-style-type: none"> <li>802.11b : +16dBm minimum</li> <li>802.11g : +14dBm minimum</li> <li>802.11a : +14dBm minimum</li> <li>802.11n HT20(2.4GHz) : +14dBm minimum</li> <li>802.11n HT40(2.4GHz) : +12dBm minimum</li> <li>802.11n HT20(5GHz) : +14dBm minimum</li> <li>802.11n HT40(5GHz) : +12dBm minimum</li> <li>802.11ac 80MHz(5GHz) : +11dBm minimum</li> </ul>	
	<sup>2</sup> Maximum output power may vary by country according to local regulations.	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated)	



### Technical Specifications – Networking

	Connect Standby: 10 mW (WLAN+BT) Radio disabled: 5 mW	
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity <sup>3</sup>	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -88dBm maximum 802.11a, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum	
	<sup>3</sup> Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth® communications	
Form Factors	PCI-Express M.2 MiniCard	
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm	
Weight	Type 2230 : 2.8g Or Type 1630 : 2g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating: Non-operating:	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
Humidity	Operating: Non-operating:	10% to 90% (non-condensing) 5% to 95% (non-condensing)
Altitude	Operating: Non-operating:	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber - Radio OFF; LED White - Radio ON	
* Wireless access point and Internet service required and not included. Availability of public wireless access points limited.		
HP Integrated Module with Bluetooth® 4.0/4.1/4.2 Wireless Technology		
Bluetooth® Specification	4.0/4.1/4.2 Compliant	

### Technical Specifications – Networking

Frequency Band	2402 to 2480 MHz														
Number of Available Channels	Legacy : 0~79 (1 MHz/CH) BLE : 0~39 (2 MHz/CH)														
Data Rates and Throughput	Legacy : 3 Mbps data rate; throughput up to 2.17 Mbps														
	BLE : 1 Mbps data rate; throughput up to 0.2 Mbps Legacy : Synchronous Connection Oriented links up to 3, 64 kbps, voice channels														
	Legacy : Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)														
Transmit Power	The Bluetooth® component shall operate as a Class II Bluetooth® device with a maximum transmit power of + 4 dBm for BR and EDR.														
Receiver Sensitivity Legacy	<table><tr><td>Modulation</td><td>0.01% BER</td><td>0.001% BER</td></tr><tr><td>GFSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>π/4-DQPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr><tr><td>8DPSK</td><td>-80 dBm</td><td>-70 dBm</td></tr></table>			Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	π/4-DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER													
GFSK	-80 dBm	-70 dBm													
π/4-DQPSK	-80 dBm	-70 dBm													
8DPSK	-80 dBm	-70 dBm													
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW														
Range	Legacy Up to 33 ft (10 m) BLE Up to 99 ft (30 m)														
Electrical Interface	USB 2.0 compliant														
Bluetooth® Software Supported Link Topology	Microsoft Windows Bluetooth® Software														
Electrical Interface Bluetooth® Software Supported Security	Point to Point, Multipoint Pico Nets up to 7 slaves														
	Full support of Bluetooth® Security Provisions														
Power Management Certifications	Microsoft Windows ACPI, and USB Bus Support														
	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff														
Security	All necessary regulatory approvals for supported countries, including:														
Certifications Bluetooth® Profiles Supported	FCC (47 CFR) Part 15C, Section 15.247 & 15.249														
Power Management Certifications	ETS 300 328, ETS 300 826														
	Low Voltage Directive IEC950														
Certifications	UL, CSA, and CE Mark														

Technical Specifications – Networking

Bluetooth® Profiles Supported	Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2</sup> Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
	Audio Video Remote Control Profile (AVRCP)
Bluetooth® V4.1/V4.2 support feature	V4.1: ESR5/6/7 compliant
	V4.2: ESR8 compliant, LE Secure Connection - Basic.

## AUDIO


### High Definition Audio - MT/SFF/DM

Type	Integrated
HD Stereo Codec	Conexant CX20632
Audio I/O Ports	Headset connector supports a CTIA style headset and <a href="#">is re-taskable as a Line-in, Line-out, Microphone-in or Headphone-out port</a>
	Rear Line-In can be retasked to function as a microphone input
	Rear Line-Out
	Front Headphone-Out
	All ports are 3.5mm and support stereo ( see above tables for system configurations)
Internal Speaker Amplifier	2W class D mono amplifier for the internal speaker only. External speakers must be powered externally.
Multi-streaming Capable	Playback multi-streaming can be enabled in the audio control panel to allow independent audio streams to be sent to/from the front and rear jacks or integrated speaker.
Sampling	Independent sampling rates for DAC's and ADC's; supports resolutions from 16 to 24-bit; 44.1 kHz to 192 kHz for DAC and 44.1 kHz to 96 kHz for ADC
Wavetable Syntheses	Yes - Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Mono Speaker	Yes

## Technical Specifications – Input/Output Devices

### Input/Output Devices

#### HP Conferencing Keyboard

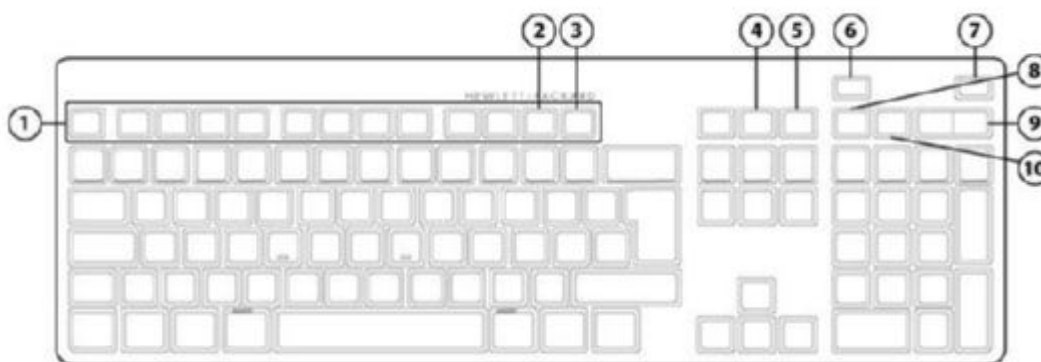

1.	Function Keys	6.	End/Decline a Call
2.	F11 Lync or Skype for Business Contact list *	7.	Answer a Call
3.	F12 Lync or Skype for Business Calendar **	8.	Microphone Mute
4.	Share Screen	9.	Volume Up/Down
5.	Stop Webcam	10.	Audio Mute

\*Microsoft Lync 2013, or Skype for Business, or Microsoft Outlook 2013 Contact list

\*\*Microsoft Lync 2013, or Skype for Business, or Microsoft Outlook 2013 Calendar

<b>Dimensions (H x L x W)</b>	0.85 x 17.34 x 6.10 in (2.16 x 44.05 x 15.50 cm)
<b>Weight</b>	24.69 oz. ( 700 g)
<b>Connectivity</b>	USB cable
<b>Keys</b>	110 (US) Layout, 111 (EU) Layout - depending upon country
<b>Feature Summary</b>	Full-size ultra-quiet keyboard with numerical pad and 12 function keys One-touch simplicity for Microsoft Lync or Skype for Business calls with dedicated keys a LED light indicators
<b>Illuminated keys</b>	Incoming Call - Blinks Green Call in progress -Green Microphone Mute - Orange Audio Mute - Orange Screen Sharing - Orange Stop Webcam - Orange
<b>Other Call control keys</b>	End/Decline Call Volume up and down rocker key

### Technical Specifications – Input/Output Devices

<b>Microsoft Lync/Outlook</b>	<p>Fn+F12 - Lync or Skype for Business Calendar will open. If Lync or Skype for Business is not available will bring Outlook Calendar *</p> <p>Fn+F11 - Lync or Skype for Business Contact will open. If Lync or Skype for Business is not available will bring Outlook Contact list *</p> <p>* Fn+11 and Fn+12 function keys are not supported in Microsoft Windows 8.x Metro mode</p>
<b>Functions Keys</b>	<p>Fn+F10 - System Settings</p> <p>Fn+F9 - Devices</p> <p>Fn+F8 - Search</p> <p>Fn+F7 - Blank</p> <p>Fn+F6 - Up Brightness Adjustment</p> <p>Fn+F5 - Down Brightness Adjustment</p> <p>Fn+F4 - Display Options</p> <p>Fn+F3 - File Explorer</p> <p>Fn+F2 - System Lock</p> <p>Fn+F1 - System Sleep</p>
<b>System requirements</b>	<p>Available USB port</p> <p>Windows 7, Windows 8.x, and Windows 10</p> <p>Server: Microsoft Lync Server 2010 or 2013 and Skype for Business Server 2015</p> <p>Client: Microsoft Lync 2013 version 15.0.46xx or newer or Skype for Business</p> <p>Notes:</p> <ul style="list-style-type: none"> <li>Limited support for Microsoft Lync 2010, Microsoft Lync 2013 Basic and Microsoft Metro Mode</li> <li>Screen brightness functions supported in select HP systems</li> </ul>
<b>Approvals EMC Product Safety</b>	<p>FCC; CE; ACA(C-tick); EAC</p> <p>UL, CE Mark</p>

### HP USB PS/2 Washable Keyboard

<b>Physical Characteristics</b>	Keys	104 (US) Layout, 105 (EU) layout - depending upon country
	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)
	Weight	1.7 lb (0.77 kg) minimum
<b>Electrical</b>	Operating voltage	+ 5VDC ±5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant



### Technical Specifications – Input/Output Devices

<b>Mechanical</b>	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
<b>Environmental</b>	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	4° to 149° F (-20° to 65° C)
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
<b>Operating system support</b>	Windows® 7, Windows Vista, Windows XP Professional	
<b>Approvals</b>	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	

### HP USB Business Slim Smartcard Keyboard

<b>Physical Characteristics</b>	Keys	104, 105, 109 layout (depending upon country)
	Dimensions (H x W x D)	17.34 x 5.68 x 0.78 in (440.6 x 14.45 x 1.98 cm)
	Weight	1.32 lb (0.6± 0.1 kg)
<b>Electrical</b>	Operating voltage	5V
	Power consumption	200 mA
	System interface	USB Interface
	ESD	Air 12.5kV / Contact 8kV
	EMI - RFI	under 3dB
	Microsoft PC 99 - 2001	Conforms to FCC rules for a Class B computing device
<b>Mechanical</b>	Keycaps	Low-profile design
	Switch actuation	60±15g nominal peak force with tactile feedback
	Switch life	10 million keystrokes (Life tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)

### Technical Specifications – Input/Output Devices

<b>Environmental</b>	Non-operating temperature	-22° to 140° F (-30° to 60° C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence	
<b>SmartCard Function</b>	Support	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	IDENTIVE CLOUD 2190 F	
	Standard APIs supported	PC/SC, EMV2000, CT-API	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
	Power consumption	100-mA maximum draw	
	Communication	From card	9600 bps to 330,000 bps
		From computer	12 Mbps (USB transfer speed)
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	CCID protocol	
	Reader performance interface	USB connection	
<b>Approvals</b>	Electro-magnetic standards	Europe	2004/108/EC
		USA	USAFCC part 15
<b>Ergonomic Compliance</b>	ISO 9241-410, TUV GS		
<b>Kit Contents</b>	Keyboard, I/O Security and Documentation CD, warranty card		

### HP USB Business Slim Keyboard

<b>Physical characteristics</b>	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	171.97 x 68.35 x 8.27 in (436.8± 1.5 x 137.6± 1.0 x 21.0± 1.0 cm)
	Weight	1.32 lb (0.6± 0.08 kg)

### Technical Specifications – Input/Output Devices

<b>Electrical</b>	Operating voltage	+ 4.4 - 5.25VDC
	Power consumption	50-mA maximum (with 5 VDC power supplied and three LEDs ON)
	System interface	USB Type A plug connector
	ESD	Contact Discharge: 2, 4,6,8KV Air Discharge: 2, 4, 8,10,12.5KV
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
<b>Mechanical</b>	Keycaps	Low-profile design
	Switch actuation	60±12.5g nominal peak force with tactile feedback
	Switch life	10 million keystrokes (Life tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
<b>Environmental</b>	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence
<b>Approvals</b>	UL, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	
<b>Kit contents</b>	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

Technical Specifications – Input/Output Devices

HP PS/2 Business Slim Keyboard		
Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	171.97 x 68.35 x 8.27 in (436.8± 1.5 x 137.6± 1.0 x 21.0± 1.0 cm)
	Weight	1.32 lb (600± 80 g)
Electrical	Operating voltage	+ 4.4 - 5.25VDC
	Power consumption	50-mA maximum (with 5 VDC power supplied and three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	Contact Discharge: 2, 4,6,8KV Air Discharge: 2, 4, 8,10,12.5KV
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Keycaps	Low-profile design
	Switch actuation	60±12.5g nominal peak force with tactile feedback
	Switch life	10 million keystrokes (Life tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant

### Technical Specifications – Input/Output Devices

<b>Environmental</b>	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	N/A
	Non-operating shock	65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface
	Operating vibration	2-g peak acceleration
	Non-operating vibration	Starting at 5 Hz, vary the frequency of vibration from 5 to 500 Hz and back to 5 Hz at a Logarithmic sweep rate of 1 octave per minute.
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	29.93 in (76 cm) on concrete, 16-drop sequence
<b>Approvals</b>	UL, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	

### HP USB (Grey) Business Slim Keyboard

<b>Physical characteristics</b>	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	17.19 x 5.41 x 0.82 in (43.68±1.5 x 13.76±1.0 x 2.1 ±1.0 cm)
	Weight	1.32 lb (0.6± 0.08 kg)
<b>Electrical</b>	Operating voltage	+ 4.4 - 5.25VDC
	Power consumption	100-mA maximum (with 5 VDC power supplied and three LEDs ON)
	System interface	USB Type A plug connector
	ESD	Contact Discharge: 4, 6, 8 KV
	EMI - RFI	Air Discharge: 8, 10, 12 KV / 15 KV
	Microsoft PC 99 - 2001	Conforms to FCC rules for a Class B computing device; Functionally compliant
<b>Mechanical</b>	Keycaps	Low-profile design
	Switch actuation	Rubber dome + membrane
	Switch life	10 million
	Switch type	Rubber dome
	Key-leveling mechanisms	Link bar
	Cable length	For all double-wide and greater-length keys
	Microsoft PC 99 - 2001	Yes
<b>Environmental</b>	Acoustics	55-dBA maximum sound pressure level
	Operating temperature	10°C to 50°
	Non-operating temperature	-30°C to 90°
	Operating humidity	10% to 90% (non-condensing at ambient)

### Technical Specifications – Input/Output Devices

	Non-operating humidity	60% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	30 in (76.2 cm) on concrete, 16-drop sequence
<b>Approvals</b>	FCC; CE; VCCI; BSMI; KC; EAC; RCM; TUV-GS; UL; RoHS; WEEE	
<b>Ergonomic compliance</b>	ANSI HFS 100; ISO 9241-4; and TUVGS	

### HP Wireless Business Slim Keyboard and Mouse

<b>Keyboard</b>	Dimensions ( L x W x H)	171.97 x 68.35 x 8.27 in (436.8± 1.5 x 137.6± 1.0 x 21.0± 1.0 cm)
	Weight - Without Two AA Alkaline Batteries	1.23 lb (560± 80 g)
<b>Mouse</b>	Dimensions (H x L x W)	1.46 x 4.53 x 2.47 in (37 x 115 x 62.9 mm)
	Weight - Without Two AA Alkaline Batteries	0.15 lb (67 g)
<b>Receiver</b>	Dimensions (H x L x W)	0.33x 1.79 x 0.72 in (8.4 x 45.5 x 18.4 mm)
	Weight	0.21 oz (5.9 g)
	Cable Length - Minimum	6 ft (1.8 m)
	Range	32.8 ft (10 m)
<b>System Requirements</b>	Available USB port for the receiver CD-ROM Drive *This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <a href="http://www.microsoft.com/windows/windows-7/">http://www.microsoft.com/windows/windows-7/</a> for details.	

### Technical Specifications – Input/Output Devices

<b>Approvals</b>	Product Safety	UL; CSA /TUV (Europe only); CE Mark; CB Report
	Ergonomics	ANSI; ISO (Europe only); GS Mark (Germany only)
	EMC	FCC; CE; ACA (-tick); BSMI; KC ; VCCI
	CE Mark	EN 55022:2010; EN 55024; EN 301489-1; EN 61000
	Design Guidelines for PCs	PC 99 - connector overmold colors; PC 2001 - full functionality
	Telecom	All local telecom requirements and approvals for intended markets
	USA	FCC Title 47 CFR, Par 15, Subpart C; other local requirements
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, Thailand, Canada, China, Japan, Korea, Taiwan, India, Venezuela, Ecuador, Russia, Ukraine, Israel, Croatia, United Arab Emirates, Peru, Brazil, Chile, Argentina, Mexico, South Africa, and up to 193 countries worldwide.
<b>Environmental</b>	Keyboard contains 25% post-consumer recycled plastic material.	

<b>HP PS/2 Mouse</b>		
<b>Dimensions</b> (H x L x W)	1.46 x 2.48 x 4.53 in (3.70 x 6.29 x 11.50 cm)	
<b>Weight</b>	3.53 oz (100g; +10g/- 5 g)	
<b>Environmental</b>	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
<b>Electrical</b>	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge



### Technical Specifications – Input/Output Devices

	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
<b>Mechanical</b>	Resolution	800 DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	±15%
	Switch actuation	65±20 gf
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	80 km
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
<b>Scroll wheel</b>	Width	6 mm
	Diameter	22.5 ± 0.2 mm
	Maximum rotation force	50 gf-cm
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions
<b>Regulatory Approvals</b>	UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick	

### HP USB 1000dpi Laser Mouse

<b>Dimensions</b> (H x L x W)	1.47 x 4.53 x 2.47 in (37.3 x 114.97 x 62.86 mm)	
<b>Weight</b>	3.360 oz (102g)	
<b>Cable length</b>	70.9 in (180 cm)	
<b>System requirements</b>	Available USB port	
<b>Environmental</b>	Operating Temperature	32° to 104° F (0° to 40° C)
	Non-operating Temperature	-4° to 140° F (-20° to 60° C)
	Operating Humidity	10% to 90% (non-condensing at ambient)
<b>Mechanical</b>	Resolution	1000dpi
	Tracking Speed	45 cm/sec
	Cable Length	70.9 in (180 cm)



### Technical Specifications – Input/Output Devices

HP USB PS/2 Washable Mouse		
<b>Dimensions</b> (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)	
<b>Weight</b>	4.44 oz (126 g)	
<b>Environmental</b>	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
<b>Electrical</b>	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC99 - 2001	Functionally compliant
<b>Mechanical</b>	Resolution	400 ± 20% DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	100 in/s/s (2.54 m/s/s)
	Switch actuation	61 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
<b>Scroll wheel</b>	Width	8 mm
	Diameter	1.01 in (25.6 mm)
	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions
<b>Regulatory approvals</b>	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

Technical Specifications – Input/Output Devices

HP USB Hardened Mouse			
Mouse Type	Wired optical mouse		
Interface	USB 2.0		
Dimensions (H x L x W)	114.97 x 62.92 x 37.3 mm (+/-0.3 mm) (11.49 x 6.29 x 1.46 in)		
Weight	92 g (+/-10 g) (3.2 oz)		
Cable length	1.8 M		
Tracking	X-Y Positioning	X-Y Wheel Resolution	1000 DPI
		Tracking Speed	Up to 30 in/sec in either X or Y direction
	Z Axis Wheel	Z Wheel Revolution	24 counts per revolution
		Tracking Speed	0 ~ 120 rpm
Environmental	Operating temperature	0° - 40°C	
	Non-operating temperature	-40° - 65°C	
	Operating humidity	90%	
	Agency Approvals	CE FCC RCM VCCI EMC EAC BSMI UL ICES-003 Class B KCC TUV/GS	
Electrical	Input Voltage & Current	4.4 ~ 5.25 VDC / 100 mA	
	Power Consumption	Under nominal 5 VDC power supplied, max current consumption is 100mA with tracking speed up to 30 in/sec	
Color	Black		
System requirements	Windows 10, Windows 8.1 32/64bit, Windows 7 32/64bit		



Technical Specifications – Input/Output Devices

HP Grey V2 Mouse		
Dimensions (H x L x W)	1.46 x 4.53 x 2.48 in (3.72 x 11.5 x 6.29 cm) ±1 mm	
Weight	3.53 oz (100g; +10g/- 5 g)	
Environmental	Operating temperature	50° to 122°F (10° to 50° C)
	Non-operating temperature	-22° to 140°F (-30° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	20% to 80% (non condensing at ambient)
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
Electrical	Operating voltage	4.75~5.25 Vdc
	Power consumption (typical)	10mA
Mechanical	Connector	USB 2.0
	Type	3D mouse (3 keys and wheel)
	Resolution	800 DPI
	Sensor	PixArt vendor Optical USB mouse sensor. DIP
	Tracking speed	30 inch/sec (max)
	Tracking acceleration	8G(max), 1G=9.8m/s2
	Cable length	6 ft (1.8 m)
Color	Grey	
Regulatory Approvals	FCC, CE, ICES, C-TICK, VCCI, KCC, BSMI, ISO9241, Part 4, Computer Work Station Ergonomics compliance, IEC 801-2, IEC 1000-4-2, EN 55024:1998 + A1:2001 + A2:2003, European Standard EN 55022: 2006 Class B, CE Mark	

HP USB Mouse		
Dimensions (H x L x W)	2.5 x 4.5 x 1.5 in (63.5 x 114.3 x 38.1 mm)	
Weight	0.22 lb (99.79 g)	
Color	Black	
Connector	USB	
Mechanical	Resolution	800 DPI sensitivity
	Buttons	Two primary buttons and clickable scroll wheel

## Technical Specifications – Miscellaneous Features

### MISCELLANEOUS FEATURES

#### Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel® Wired for Management support; industry wide initiative to make Intel® architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

#### Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
  - Power LED will blink red 2 to 5 times, then blink white 2 or more times, then repeat (with beep tones for each blink initially):

■ 2 red + 2 white	User must provide file for BIOS recovery (USB storage typically)
■ 2 red + 3 white	User must enter a key sequence to proceed with recovery by policy
■ 2 red + 4 white	BIOS recovery is in progress
■ 3 red + 2 white	Memory could not be initialized
■ 3 red + 3 white	Graphics adapter could not be found
■ 3 red + 4 white	Power supply failure / not connected
■ 3 red + 5 white	Processor not installed
■ 3 red + 6 white	Current processor does not support an enabled feature
■ 4 red + 2 white	Processor has exceeded its temperature threshold / system thermal shutdown
■ 4 red + 3 white	System internal temperature has exceeded its threshold
■ 5 red + 2 white	System controller firmware is not valid
■ 5 red + 3 white	System controller detected BIOS is not executing
■ 5 red + 4 white	BIOS could not complete initialization / PCA failure
■ 5 red + 5 white	System controller rebooted the system after a health or recovery timer triggered
- HP PC Hardware Diagnostics UEFI:
  - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from <http://hp.com/go/techcenter/pcdiags>
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- BIOS recovery files are maintained on the local OS drive when updating with HP BIOS Update and Recovery utility (HPBIOSUPDREC)
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- CD & Diskette Removal
- Tool icon for easy Identification

ADDITIONAL FEATURES

	Description
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Boot Sectors Protection	MBR or GPT boot sectors of the hard drive are critical to securely starting the operating system. By saving the MBR or GPT data (depending on the how the OS was installed), the BIOS will be able to monitor for changes and allow the user to override them with the backup copy at boot-up.
Drive Protection System	<p>DPS Access through F10 Setup during Boot</p> <p>A diagnostic hard drive self-test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user</p> <p>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced</p> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I - Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II - Off-Line Data Collection	By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure
SMART III - Off-Line Read Scanning with Defect Reallocation	IOEDC: I/O Error Detection Circuitry
SMART IV - End-to-End CRC for hard drives	Detects errors in Read/Write buffers on HDD cache RAM Interface in F10 setup provides confirmation of SMART IV support.

After-Market Options (availability may vary by region)

### Business Monitors (sample list)\*

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP ProDisplay P240va 23.8-inch Monitor	X	X	X	X
HP ProDisplay P232 23-inch Monitor	X	X	X	X
HP ProDisplay P222c 21.5-inch Video Conferencing Monitor	X	X	X	X

\*Additional models are available.

### Communication Devices

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
Intel® Ethernet I210 - T1 Gbe NIC		X	X	X
Intel® 7265 802.11ac 2x2 DualBand Combo PCIe x1 Card		X	X	X

### Graphics Solutions

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
NVIDIA® GeForce® GT 730 2GB DP PCIe x8 Card		X	X	X
AMD® Radeon R7 450 4GB PCIe x16 Card			X	X
HP UHD USB Graphics Adapter	X	X	X	X
HP DisplayPort Cable Kit	X	X	X	X
HP DisplayPort To DVI-D Adapter	X	X	X	X
HP DisplayPort To VGA Adapter	X	X	X	X
HP DisplayPort To HDMI 4k Adapter	X	X	X	X
HP DVI to DVI Cable	X	X	X	X
HP (Bulk) 700mm DisplayPort Cable Kit	X	X	X	X

### Data Storage Drives

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP 500GB 7200PRM SATA 6.0Gb/s 3.5" Hard Drive		X	X	X
HP 1TB 7200rpm SATA 6Gb/s 3.5" Hard Drive		X	X	X
HP 256GB SATA TLC Solid State Drive	X	X	X	X
HP 512GB Turbo Drive G2 TLC M.2 SSD Drive	X	X	X	X
HP 9.5mm Slim Removable SATA 500GB		X	X	X
HP 256GB SATA Non-SED Solid State Drive	X	X	X	X
HP 9.5mm G3 8/4 SFF G4 400 SFF/MT DVD-Writer		X	X	X

### Input Devices

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP Conferencing Keyboard	X	X	X	X
HP USB Business Slim Keyboard	X	X	X	X
HP PS/2 Business Slim Keyboard	X	X	X	X
HP Wireless Business Slim Keyboard and Mouse**	X	X	X	X
HP USB Business Slim Grey Keyboard (EMEA only)	X	X	X	X
HP USB Business Slim Smart Card CCID Keyboard	X	X	X	X
HP USB PS/2 Washable Keyboard and Mouse Kit**	X	X	X	X
HP USB Grey V2 Mouse (EMEA only)	X	X	X	X
HP USB Business Slim Keyboard and Mouse (China Only)	X	X	X	X
HP USB Hardened Mouse	X	X	X	X
HP PS/2 Mouse (Expansion module required for use with DM)	X	X	X	X
HP USB Mouse	X	X	X	X
HP USB 1000dpi Laser Mouse	X	X	X	X

\*\* Keyboard contains 25% post-consumer recycled plastic material

### Desktop Mini Accessories

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP Desktop Mini DVD Super Multi-Writer ODD Expansion Module	X			
HP Desktop Mini 500GB HDD/ I/O Expansion Module	X			

### After-Market Options (availability may vary by region)

HP Desktop Mini Rack Mount Tray Kit	X			
HP Desktop Mini Security/Dual VESA Sleeve	X			
HP Desktop Mini 65W Power Supply Kit	X			
HP Desktop Mini 90W Power Supply Kit	X			
HP Desktop Mini Vertical Chassis Stand	X			
HP Desktop Mini Lock Box	X			
HP Desktop Mini Port Cover Kit	X			
HP Desktop Mini I/O Expansion Module	X			
HP Integrated Work Center Desktop Mini/Thin Clients	X			
HP Single Monitor Arm	X			
HP Quick Release Bracket	X			

### System Memory

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP 4GB DDR4-2400 DIMM		X	X	X
HP 8GB DDR4-2400 DIMM		X	X	X
HP 16GB DDR4-2400 DIMM		X	X	X
HP 4GB DDR4-2400 SODIMM	X			
HP 8GB DDR4-2400 SODIMM	X			
HP 16GB DDR4-2400 SODIMM	X			

### Multimedia Devices

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP Business Headset v2	X	X	X	X
HP USB Business Speakers v2	X	X	X	X

### Security Devices

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP Business PC Security Lock v2 Kit		X	X	X
HP Keyed Cable Lock 10mm Kit	X	X	X	X
HP Dual Head Keyed Cable Lock Kit	X	X	X	X

### Stands and Accessories

	400 G3 DM	400 G4 SFF	400 G4 MT	480 G4 MT
HP (10) 400 G4 600/800 G3 SFF G4 MT Bezel Support Kit		X	X	
HP Single Monitor Arm	X	X	X	X

### LANDesk Software (E-Delivery)\*

\*Optional and sold separately.

© Copyright 2017 HP Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the e warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron, Core, Pentium are registered trademarks or trademarks of Intel Corporation in the U.S. and other countries. Bluetooth® is a trademark of its proprietor, used by HP, Inc. under license. USB Type-C and USB-C are trademarks of USB Implementers Forum. NVIDIA, GeForce and NVS are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Radeon are trademarks of Advanced Micro Devices, Inc. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. DisplayPort and the DisplayPort logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States.



After-Market Options (availability may vary by region)  
countries.



[illegible]