


PRESTIGIO®

GRAPHENE PD

Portable charger

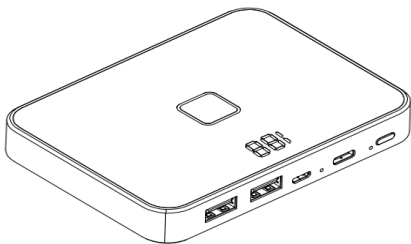

User Manual

Contents:

Read Before Using	3
Benefits of Prestigio Graphene PD portable charger	5
Product Bundle	6
Components and Interface Elements	7
Technical Specifications	9
Operation Guide	10
Safety Guidelines	13
LED Indicators	15
Troubleshooting	16
Care Recommendations	20
Transportation and Storage Rules	21
Waste Disposal	22

Read Before Using

Thank you for choosing the Prestigio Graphene PD wireless charger. To ensure that you are using the charger correctly and safely, please read this manual before you start. Do not discard the manual, as you may have to refer to it in the future.

Please note that the design and position of certain elements may differ from the images and descriptions you will find below because, as part of its commitment to continuous improvement, the manufacturer reserves the right to alter the charger's specifications without prior notice.

The company will not be held liable for damage caused by improper use of the charger.

The purpose of this manual is to provide information, and it does not constitute any overt or covert warranty.

For the latest updates, go to www.prestigio.com.

Benefits of Prestigio Graphene PD Charger

The Prestigio Graphene PD portable charger is designed for your comfort. It brings together all the features of a modern high-tech device in a stylish body.

By using the included power adapter, you can fully charge your device in just 40 minutes.


The combination of a portable charging device and a wireless charging interface for smartphones provides the easiest, most flexible use possible.

All of Prestigio Graphene PD's ports support the modern QC3.0/PD quick charge protocols.

Product Bundle

Prestigio Graphene PD wireless charger	1 pc.
Power adapter 12V/5A	1 pc.
USB-C 1m cable	1 pc.
Quick user guide	1 pc.
Warranty card	1 pc.

Components and Interface Elements

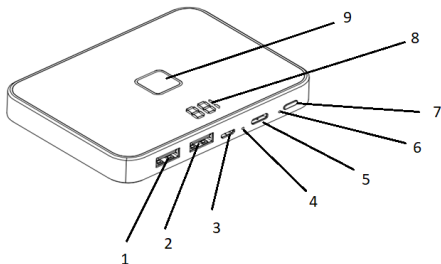

- 1, 2. USB-A
- 3. Micro-USB
- 4. Port use indicator
- 5. USB-C
- 6. Wireless charging indicator
- 7. On button

- 8. Battery level indicator
- 9. Spot where you should align with the center of your smartphone for wireless charging.

Technical Specifications

Weight	0.29 kg
Dimensions	110*80*17 mm (l*w*h)
Body material	Aluminum, tempered glass
Capacity	10,000 mA per hour (37 W per hour)
USB-A1 (output)	QC3.0 (5V3A/9V2A/12V1.5A)
USB-A2 (output)	QC3.0 (5V3A/9V2A/12V1.5A)
USB-B (input)	QC3.0 (5V3A/9V2A/12V1.5A)
USB-C (output)	QC3.0/PD (5V3A/9V2A/12V1.5A)
USB-C (input) When used with the original charger	12V/5A
USB-C (input)	QC3.0/PD (5V3A/9V2A/12V1.5A)
Wireless interface	5W/7.5W/10W
Operating temperature	-10 to 45 °C

Operation Guide

Fully charge the device before the first use. Use the power adapter included.

Wired charging

Connect the device that you would like to charge to the respective port by using an appropriate cable.

Attention!

You should only use cables of sufficient quality. Cable quality is one of the key factors impacting charging speed.

Wireless charging

1. Press the portable charger's On button.
2. Wait for the wireless charging indicator to light up blue and blink 3 times, then go out for 2 seconds, then light up again.
3. The indicator will remain active for 7 seconds, giving you time to place your smartphone on the specially designated spot. Note that the smartphone must support wireless charging.

4. The indicator will continue to blink regularly throughout the wireless charging process to indicate that the charger is in use.

Attention

While charging, do not place any metal objects (including paper clips, coins, keys, etc.) or plastic bank cards between the smartphone and the charging pad. This may damage your smartphone or its case, the charging pad, or the object within the charger's active range.



Charging multiple devices

The Graphene PD portable charger can be connected to several devices at the same time for wired charging, or a combination of wired and wireless charging. To charge multiple devices, simply connect them to the charger using any available method.

Safety Guidelines

1. Do not open the portable charger or take it apart.
2. Do not attempt to replace the built-in batteries.
3. Do not break or pierce the charger or the included batteries.
4. Keep away from ignition sources.
5. Do not use the charger inside a case, bag, or other enclosed container or space. The charger must always have free access to air.
6. Keep away from direct sunlight: do not store the charger and especially do not use it in direct sunlight. Avoid any risk of the device overheating.
7. Use the charger only for its intended purpose.
8. If you have run into an issue, or if any part of the charger has been damaged, stop using it immediately, unplug it, and contact a service center.
9. The charger cannot come into contact with moisture, oil, chemicals, or any organic fluids. We do not recommend using the charger in areas with high humidity.
10. Do not use the charger in very dusty places.

11. Keep the charger and its accessories out of the reach of children.

LED Indicators

The port use indicator shows a solid green light.	One or several Prestigio Graphene PD ports are in use.
The wireless charging indicator shows a blinking blue light.	Prestigio Graphene PD is in wireless charging mode.
The battery level indicator blinks periodically. The port use and wireless charging indicators are dark.	Prestigio Graphene PD is charging

Troubleshooting

General issues

- If you run into any issues, always start troubleshooting by ensuring that the charger is not damaged or covered in any foreign substances and that it does not have an unpleasant odor. If you discover any of the above, stop using the charger immediately and contact the service center.
- Ensure that the charger has not been subjected to excessive cold or heat. Leave it at room temperature for at least 30 minutes. To ensure normal operation, the ambient temperature around the charger must be between -10 °C and 45 °C.

<p>The charger is not working. The battery level indicator is dark</p>	<ul style="list-style-type: none">- Ensure that the charger has not simply lost its charge. Connect it to the included power adapter for at least 10 minutes- Ensure that the socket you have plugged the adapter into is receiving power
<p>The device is not charging. The battery level indicator is stuck at 0</p>	<ul style="list-style-type: none">- Ensure that the socket you have plugged the adapter into is receiving power- Connect the charger to the included power adapter for at least 10 minutes
<p>Wired charging is not working</p>	<ul style="list-style-type: none">- Ensure that the portable charger has not simply lost its charge.- Check the integrity of the cable that you are using.- Try using another cable.

<p>Wireless charging is not working</p>	<ul style="list-style-type: none">- Ensure that the portable charger has not simply lost its charge.- Ensure that your smartphone supports wireless charging- Ensure that no other objects were placed between the charger and the smartphone- Take the smartphone out of its case- Ensure that your smartphone is properly aligned with the charging pad Try repositioning your smartphone by moving it a little in different directions
<p>The problem isn't solved</p>	<p>If this didn't solve your problem or if you have additional questions, please contact customer support. The contact information is provided in the warranty card.</p>

Care Recommendations

Clean the charger with a soft, dry cloth or with alcohol-free wipes for cleaning office equipment.

Transportation and Storage Rules

1. The charger is not intended for use in residential, business, or industrial zones with a hazard risk.
2. We recommend storing and using the charger in environments where temperatures range from 0 °C to +45 °C and the relative humidity is 10~80%.
3. Long-term storage is permitted only in the charger's original packaging in dark, dry, clean, well-ventilated enclosed spaces.
4. The charger may be shipped by any means of transport across any distance, but it must be shipped in its original packaging.

Waste Disposal

Do not dispose of the charger and its accessories with regular household waste. At the end of their service life, take them to an electronics recycling facility.

© 2020 Prestigio. Все права защищены. Все указанные торговые марки и названия, а также логотипы и другие символы являются собственностью их соответствующих владельцев. Компания Prestigio оставляет за собой право вносить изменения в настоящий документ без предварительного уведомления клиентов и не несет ответственности за любые возможные негативные последствия, которые могут возникнуть из-за технических и/или типографских ошибок и/или использования устаревшей версии данного документа.

prestigio.com

