


Wi-Fi + RF Switch Module

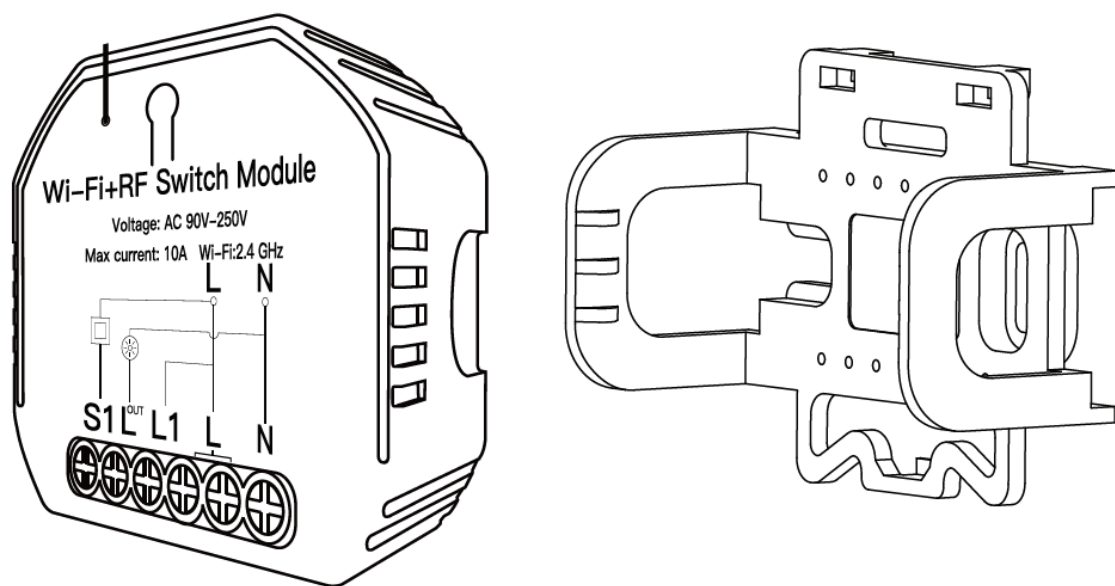

MS-104

User Manual • Uživatelský manuál

Dear customer,

Thank you for purchasing our product. Please read the following instructions carefully before first use and keep this user manual for future reference. Pay particular attention to the safety instructions. If you have any questions or comments about the device, please contact the customer line.

✉ www.alza.co.uk/kontakt

☎ +44 (0)203 514 4411

Importer Alza.cz a.s., Jankovcova 1522/53, Holešovice, 170 00 Praha 7, www.alza.cz


Global international operation Whenever & Wherever You are, All-in-one Mobile App



Schedule
timer




Voice
control-work
with Google




Home Voice
control-work
with Amazon



Alexa Device
Sharing

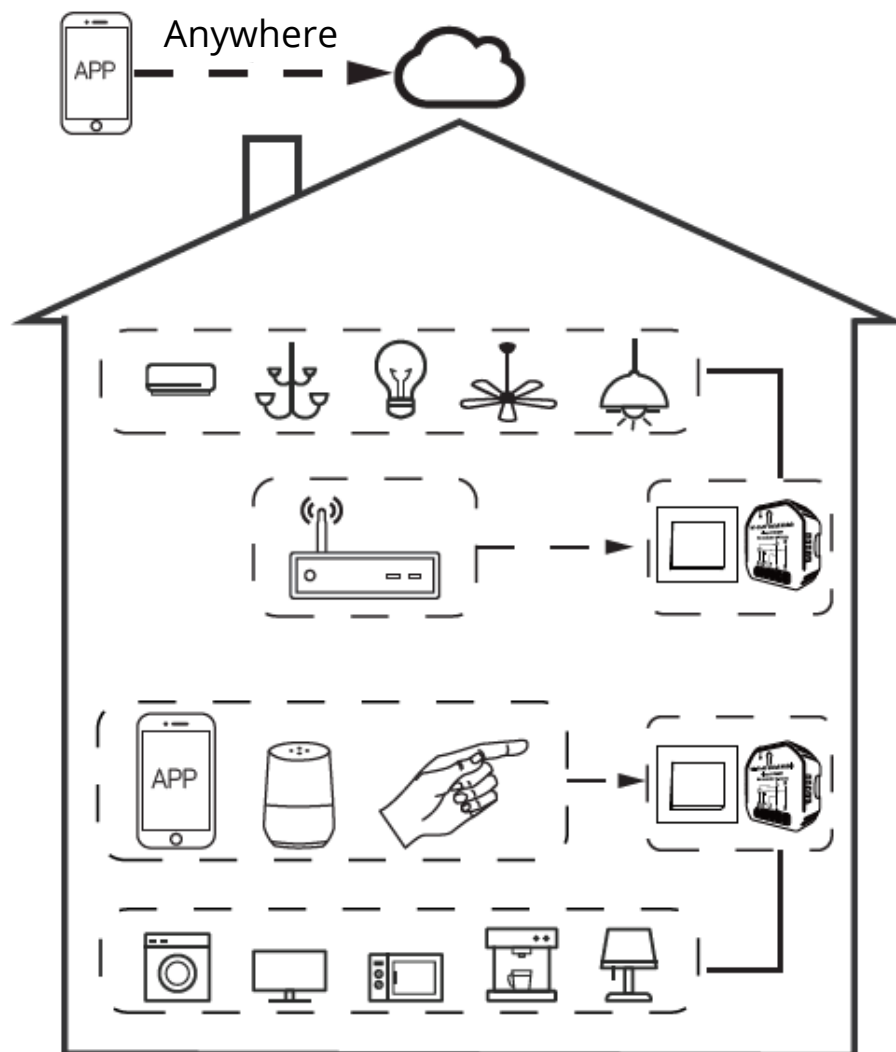

Inhouse local operation

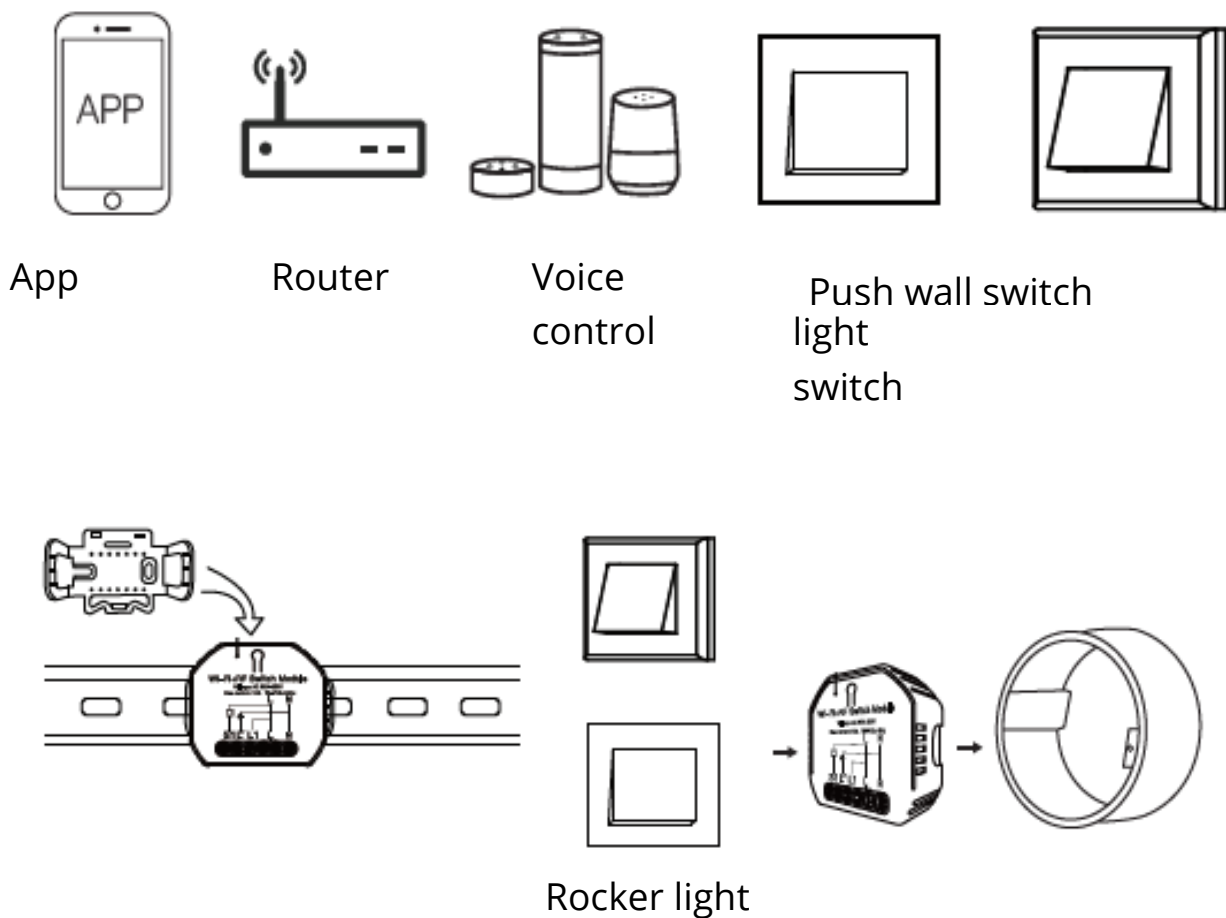


Installation

Warnings:

1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of the reach of children.
3. Keep the device away from water, damp, or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulting in abnormal operation of the device.

5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble, repair, or modify the device.

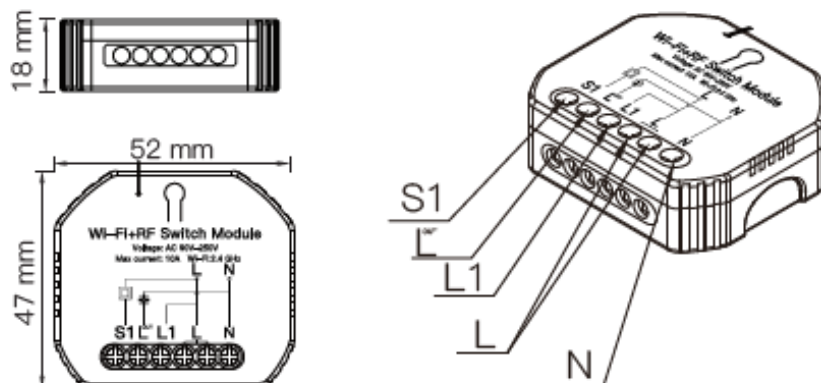


Technical specifications


Product type	Wi-Fi + RF Switch Module
Voltage	90-250V AC
Current	10A
Wi-Fi frequency	2.4GHz Wi-Fi
RF frequency	RF433 MHz
Operation temp.	-10°C - +40°C
Case temp.	Tc: +80°C (Max.)
Operation range	≤ 200 m
Dims (WxDxH)	52x47x18 mm
IP rating	IP20
Warranty	2 years

Wiring diagram


1. With one switch

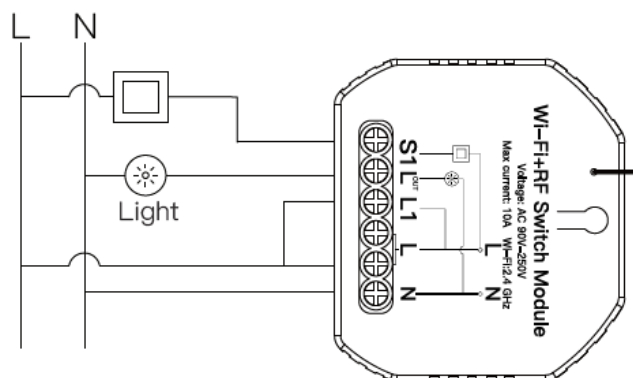


2. Without switch

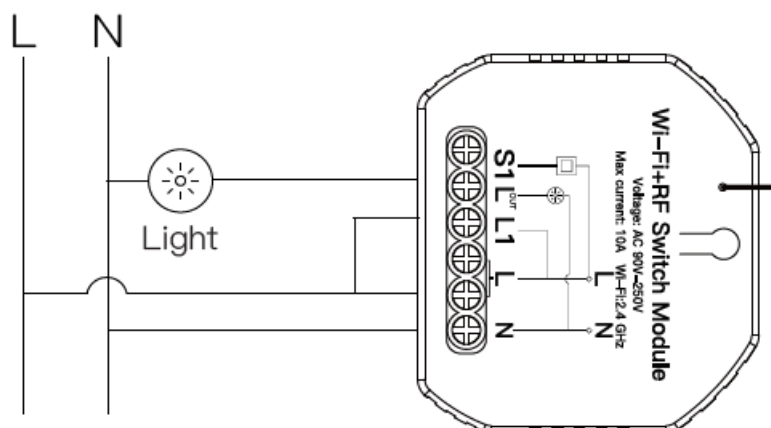

3. With 2 Way switches

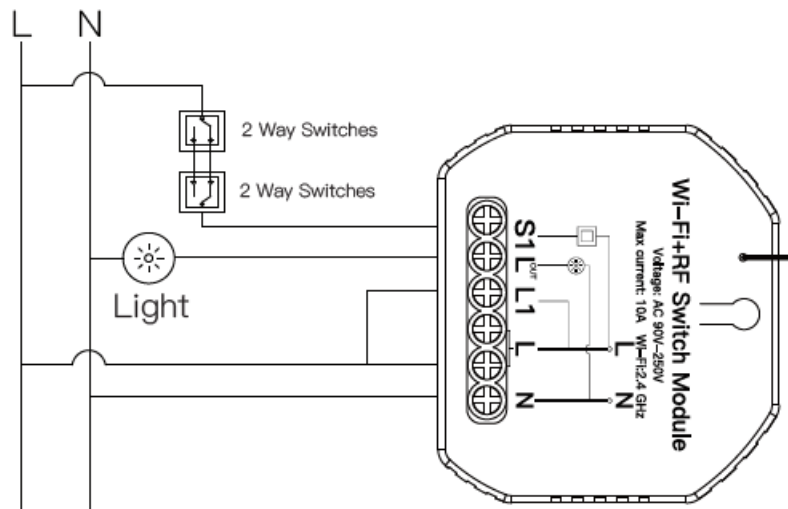

4. With Wall Socket

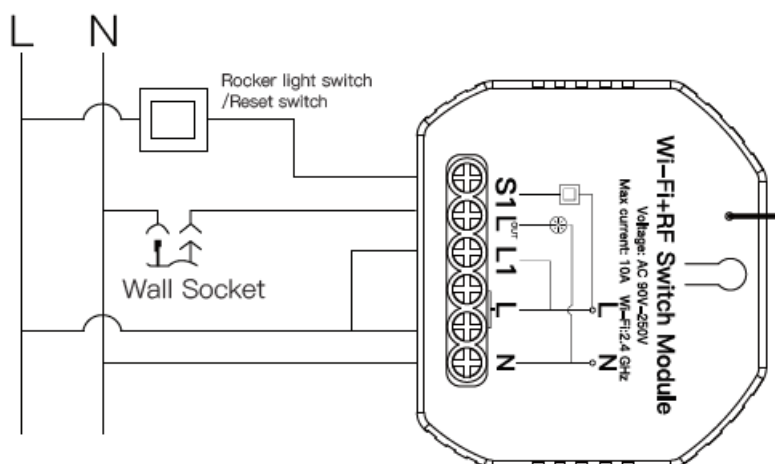

Wiring Instructions and Diagrams

1. Turn off the power supply before carrying out any electrical installation work.
2. Connect wires according to the wiring diagram.
3. Insert the module into the junction box.

4. Connect the power supply and follow switch module configuration instructions.

NOTES:

Put your smartphone close to the switch module when you are configuring, and make sure you have min. 50% Wi-Fi signal.

FAQ

Q1: What should I do if I cannot configure the switch module?

- a. Please check whether device is powered on.
- b. Make sure your mobile and switch module are under the same 2.4 GHz Wi-Fi network.
- c. Whether it is in good internet conditions.
- d. Make sure the password entered in App is correct.
- e. Make sure the wiring is correct.

Q2: What device can be connected to this Wi-Fi switch module?

Most of your household electrical appliances can be, such as lamps, laundry machine, coffee maker, etc.

Q3: What happens if the Wi-Fi goes off?

You can still control the device connected to the switch module with your traditional switch and once Wi-Fi is active again the device connected to module will connect automatically to your Wi-Fi network.

Q4: What should I do if I change the Wi-Fi network or change the password?

You must re-connect Wi-Fi switch module to the new Wi-Fi network according to the App User Manual.

Q5: How do I reset the device?

Power on/off device 5 times until the beeper on module sounds continuously.

Manual override

The switch module terminal reserves the access of manual override function for the end-user to switch on/off.

Switch on/off permanent on/off function.

NOTES:

1. Both the adjustment on App and switch can be reset, the last adjustment remains in memory.
2. The App control is synchronizing with the manual switch.

APP USER MANUAL



iOS App / Android App



1

Scan the QR code to download Smart Life App, or you can also search keyword “Smart Life” at App Store or Google play to download App.


2



Log in register your account with your mobile number or e-mail address. Type in the verification code sent to your mobile or mailbox, then set your login password. Click “Create Family” to enter the App.

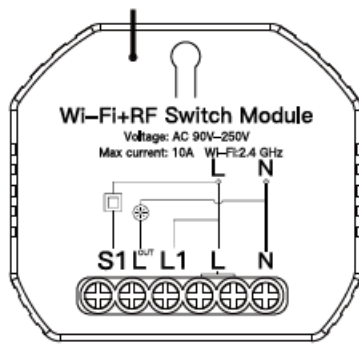

Rocker light switch



Push wall switch (Reset switch)

3


Wi-Fi link method: (two pairing methods)

Complete the wiring of the switch module before pairing

Method one:

Pair and clear up the Wi-Fi code with Bluetooth and Wi-Fi connected meantime. (New Updated)


1. Make sure your phone is connected to Wi-Fi and Bluetooth.

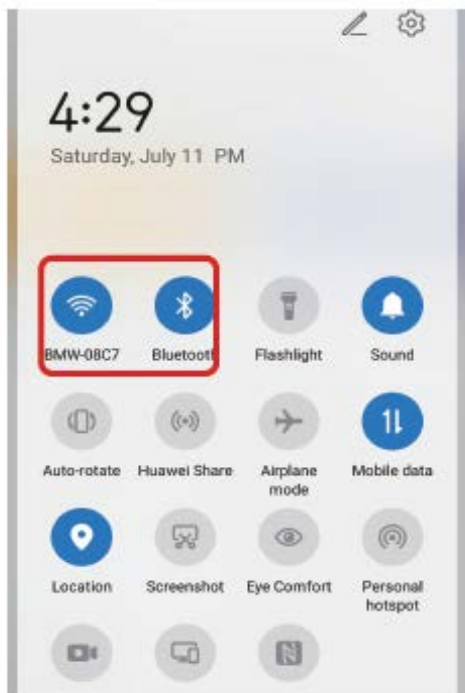



2. Open Smart Life / Tuya App and Click “+”, then the prompt page will automatically show on the screen. Click “Go to add”.




3. Select the device you want to add and click “+”.

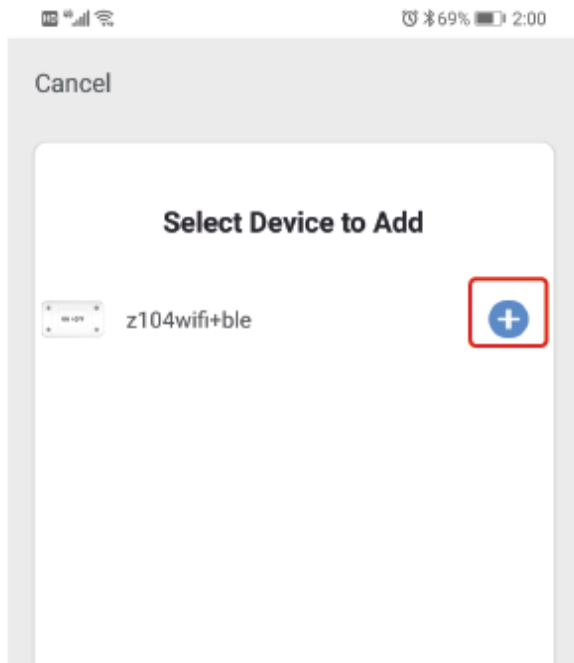

4. Enter Wi-Fi Password and click “Next”, waiting for completing the connection.

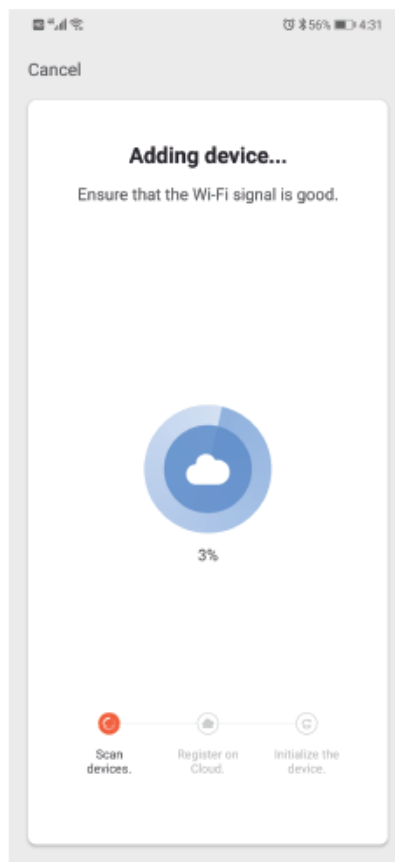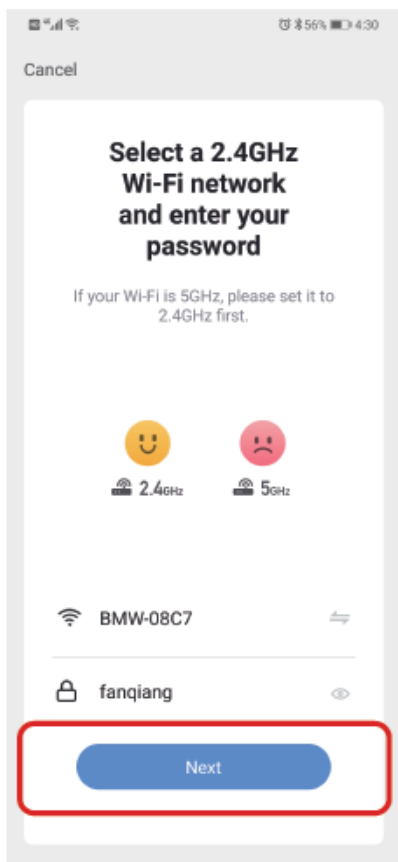

5. Add the device successfully, you can edit the name of the device to enter the device page by click “Done”.

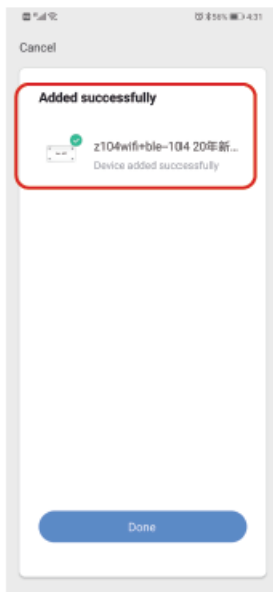

How to reset Wi-Fi code

a. **For reset switch:** press the switch button for 10 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.

b. **For rocket light switch:** press the switch button for 20 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.

NOTE:

This Wi-Fi + RF switch module fits for rocker light switch and reset switch meanwhile. Please pay attention to the different pairing modes.


Method two:

Pair with traditional pairing method. After the wiring of switch module is done, press the traditional switch to enter the pairing mode.

a. **For reset switch:** press the switch button for 10 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.

b. **For rocket light switch:** press the switch button for 20 times until the beep sounds continuously and rapidly as Di-Di-Di... for pairing and reset mode.

4

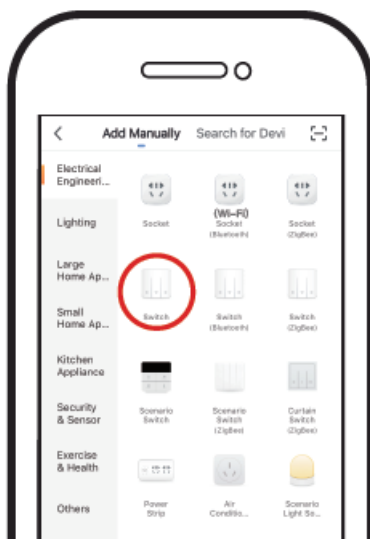


Open the App, select “+” on top right and choose “Switch (Wi-Fi)” to add device.

5




Make sure your smart phone and Wi-Fi + RF switch module are under the same Wi-Fi network at 2.4GHz connection. Confirm when the light blinks rapidly (twice a second).

6

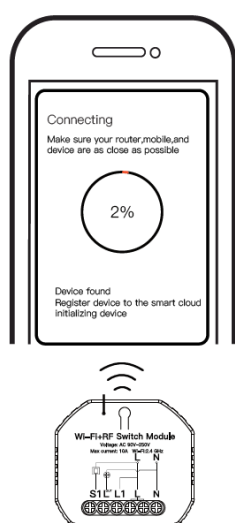


The connecting will take about 10-120 seconds to complete depending on your network condition.

7

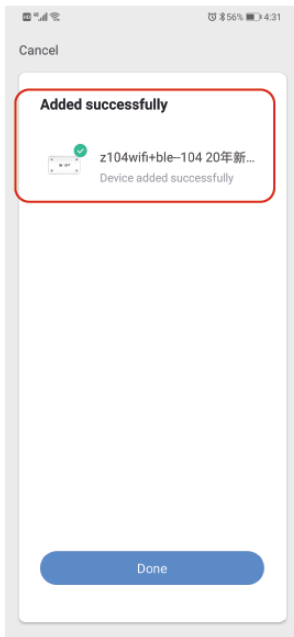


When pairing is done, the switch will be shown on the App.

8

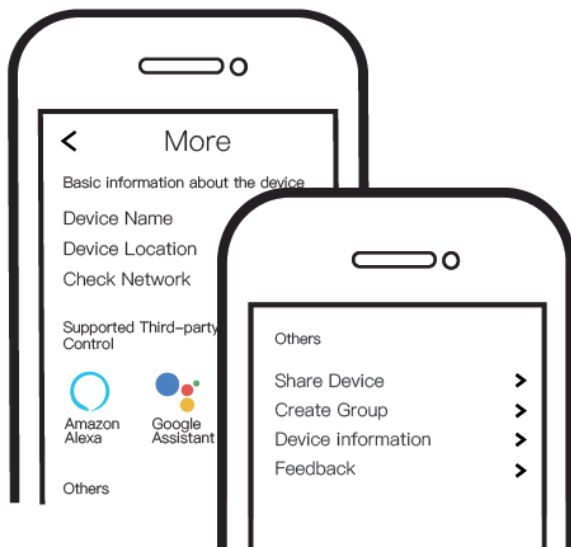

Connect to Amazon Alexa or Google Assistant for voice control or share the devices with your families or friend.

9

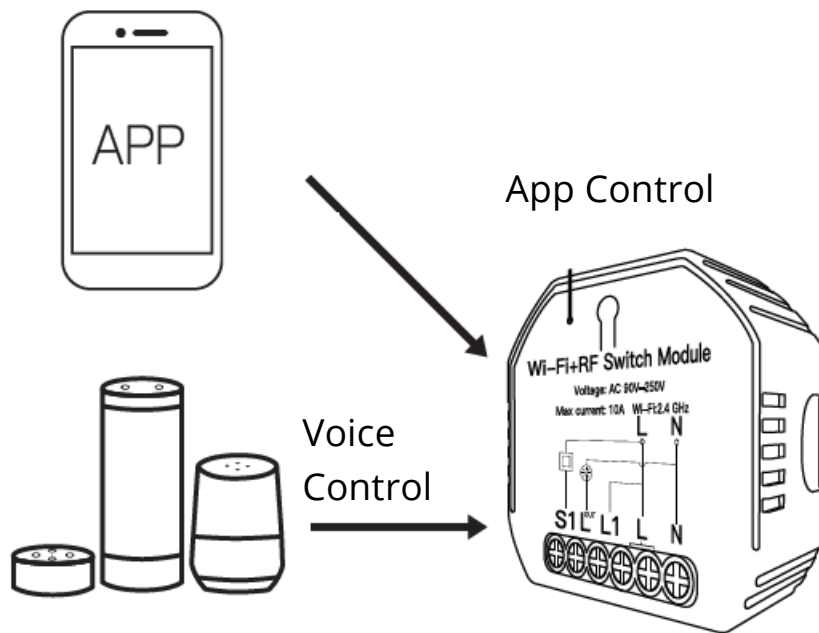

Enjoy your smart life of home automation for lighting control by using our All-in-one mobile App wherever you are in the world or simply by voice control when you are sitting at home comfortably.

Pair and clear up the RF code

1. How to pair the RF code

- a. **For reset switch:** press the switch button for 5 times until do you hear Di-Di (2 times). Then the matching of RF code is successful.
- b. **For rocket light switch:** press the switch button for 10 times (ON/OFF cycle for 5 times) until do you hear Di-Di (2 times). Then the matching of RF code is successful.

2. How to clear up the RF code

a. **For reset switch:** press the switch button for 5 times until do you hear Di-Di (2 times), waiting for 5 seconds, press the switch button for 5 times again until do you hear Di-Di-Di-Di (4 times). Then the RF code is now cleared up.

b. **For rocket light switch:** press the switch button for 10 times (ON/OFF cycle for 5 times) until do you hear Di-Di (2 times), waiting for 5 seconds, press the switch button for 10 times (ON/OFF cycle for 5 times) again until do you hear Di-Di-Di-Di (4 times). Then the RF code is now cleared up.

How to achieve multi-control association

NOTE:


Please confirm you have successfully finished the Wi-Fi link method above for adding this switch to your Smart Life App before the association.

1. Wi-Fi- add another smart switch to the same Smart Life / Tuya App. (If there is a smart switch having been added before to the app, just go to next step.)


NOTE:

There is no need to wire the new added switch to the light, only L and N are required for wiring.

2. Then you will see two devices in the app and click the main switch (as One gang switch below) by entering the next operation.

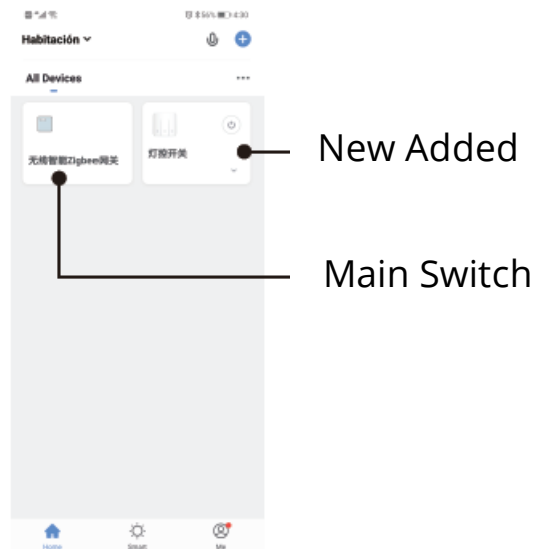

3. Click  in the upper right corner and choose “Multi-Control Association” and then click “+” in the right corner.

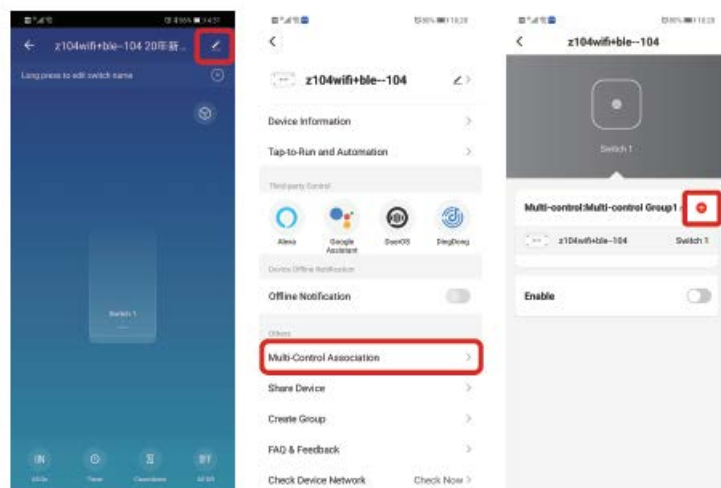

4. Choose the switch that you want to associate to and then choose the switch button that you want to control the same light.

5. Then go back to previous page, you will see two items in the page, one is your main switch, the other is the one you associate just now.


NOTE:

Please confirm the associated switch is enabled.



6. Now you can control your light with two switches. Do not associate another button in the same switch for multi-control.

7. If you want to add another third or more smart switches to control your light, just repeat the steps above. And you will see the result as below when you associate another new switch.

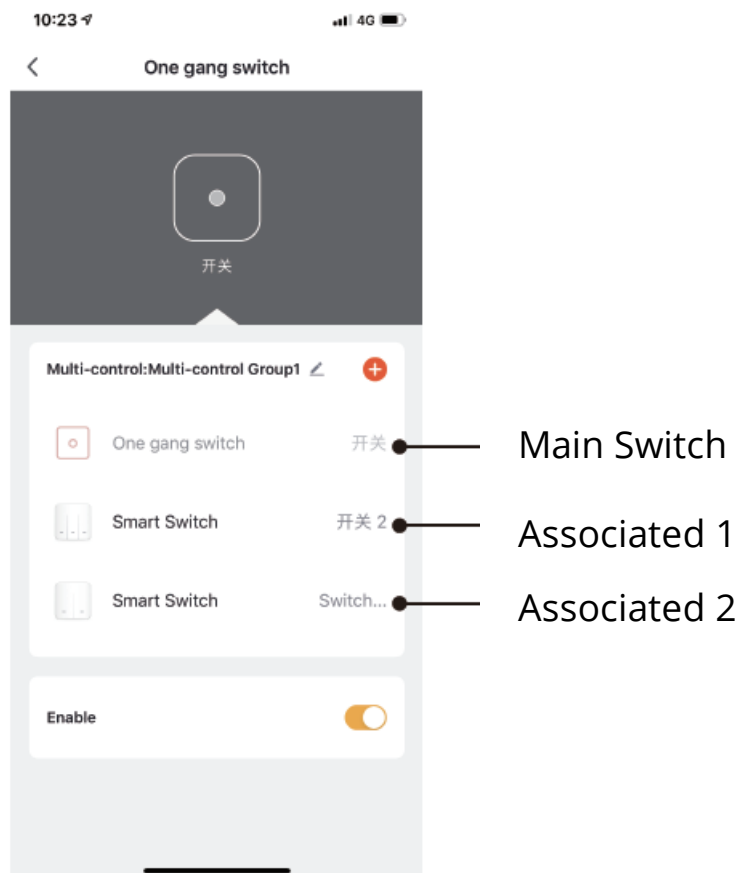

Warranty Conditions

A new product purchased in the Alza.cz sales network is guaranteed for 2 years. If you need repair or other services during the warranty period, contact the product seller directly, you must provide the original proof of purchase with the date of purchase.

The following are considered to be a conflict with the warranty conditions, for which the claimed claim may not be recognized:

- Using the product for any purpose other than that for which the product is intended or failing to follow the instructions for maintenance, operation and service of the product.
- Damage to the product by a natural disaster, the intervention of an unauthorized person or mechanically through the fault of the buyer (e.g. during transport, cleaning by inappropriate means, etc.).
- Natural wear and aging of consumables or components during use (such as batteries, etc.).
- Exposure to adverse external influences, such as sunlight and other radiation or electromagnetic fields, fluid intrusion, object intrusion, mains overvoltage, electrostatic discharge voltage (including lightning), faulty supply or input voltage and inappropriate polarity of this voltage, chemical processes such as used power supplies, etc.
- If anyone has made modifications, modifications, alterations to the design or adaptation to change or extend the functions of the product compared to the purchased design or use of non-original components.

EU Declaration of Conformity

Identification data of the manufacturer's / importer's authorized representative:

Importer: Alza.cz a.s.

Registered office: Jankovcova 1522/53, Holešovice, 170 00 Prague 7

IČO: 27082440

Subject of the declaration:

Title: Wi-Fi + RF Switch Module

Model / Type: MS-104

The above product has been tested in accordance with the standard(s) used to demonstrate compliance with the essential requirements laid down in the Directive(s):

Directive No. (EU) 2014/53/EU

Directive No. 2011/65/EU as amended 2015/863/EU

Prague, 23.8.2020



WEEE

This product must not be disposed of as normal household waste in accordance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE - 2012/19 / EU). Instead, it shall be returned to the place of purchase or handed over to a public collection point for the recyclable waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. Contact your local authority or the nearest collection point for further details. Improper disposal of this type of waste may result in fines in accordance with national regulations.



Vážený zákazníku,

děkujeme Vám za zakoupení našeho produktu. Prosíme, pečlivě si přečtěte následující instrukce před prvním použitím a uživatelskou příručku si uschovejte pro pozdější užití. Zejména dbejte na bezpečnostní pokyny. Pokud máte jakékoliv dotazy či připomínky ohledně přístroje, prosíme, obraťte se na zákaznickou linku.



www.alza.cz/kontakt




+420 255 340 111

Dovozce Alza.cz a.s., Jankovcova 1522/53, Holešovice, 170 00 Praha 7, www.alza.cz


Globální mezinárodní provoz, kdykoli a kdekoli jste, mobilní aplikace typu „vše v jednom“.



Časový
rozvrh




Hlasové
ovládání



Amazon Alexa



Sdílení zařízení

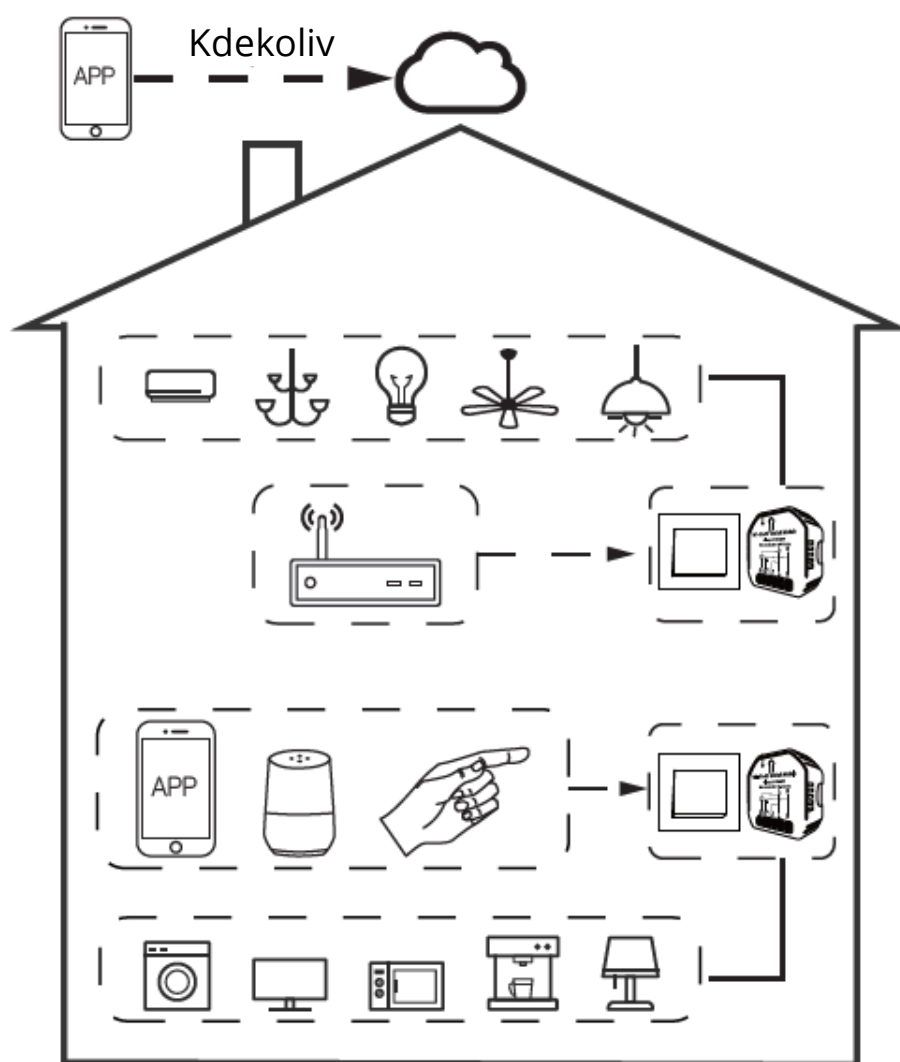

Interní místní provoz




Aplikace







Router




Hlasové
ovládání



Push nástěnný spínač
(resetovací spínač)

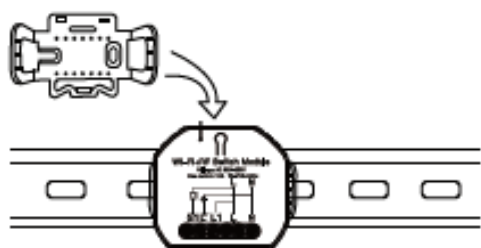


Kolébkový
spínač světla

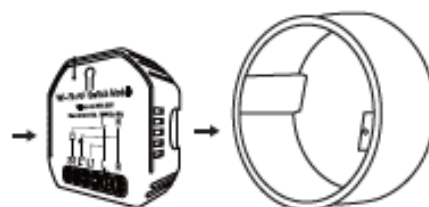

Instalace

Varování:

1. Instalaci musí provést kvalifikovaný elektrikář v souladu s místními předpisy.
2. Uchovávejte zařízení mimo dosah dětí.
3. Chraňte zařízení před vodou, vlhkem nebo horkým prostředím.
4. Instalujte zařízení mimo dosah silných zdrojů signálu, jako je mikrovlnná trouba, které by mohly způsobit přerušení signálu a abnormální provoz zařízení.
5. Překážky betonovými stěnami nebo kovovými materiály mohou snížit efektivní dosah zařízení a je třeba se jim vyhnout.
6. Nepokoušejte se zařízení rozebírat, opravovat nebo upravovat.

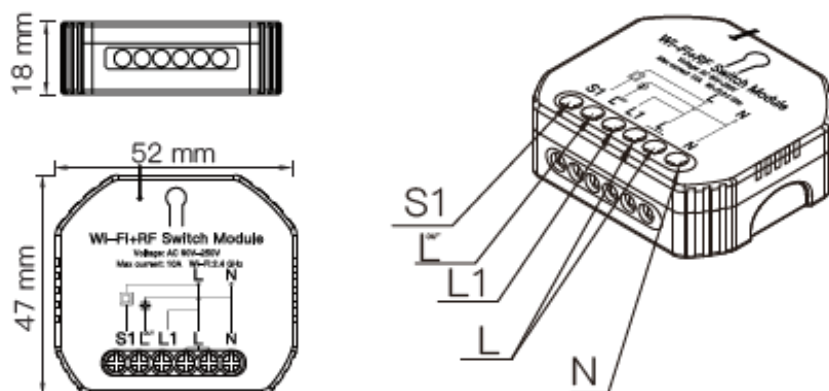


Technické specifikace


Typ produktu	Wi-Fi + RF Spínací modul
Napětí	90-250V AC
Proud	10A
Wi-Fi frekvence	2.4GHz Wi-Fi
RF frekvence	RF433 MHz
Provozní teplota	-10°C - +40°C
Teplota případu	Tc: +80°C (Max.)
Provozní rozsah	≤ 200 m
Rozměry	52x47x18 mm
Hodnocení IP	IP20
Záruka	2 roky

Elektrické schéma


1. S jedním spínačem

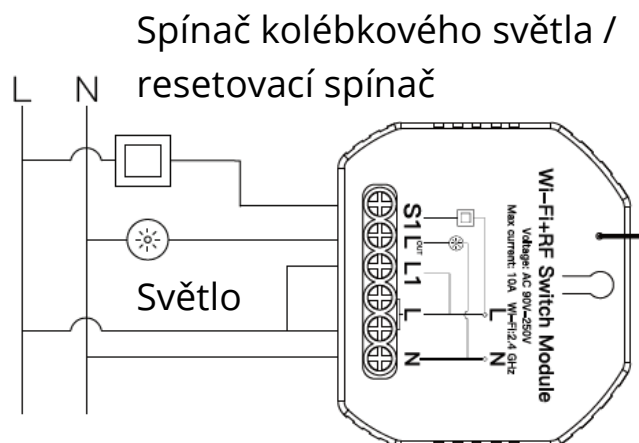


2. Bez spínače

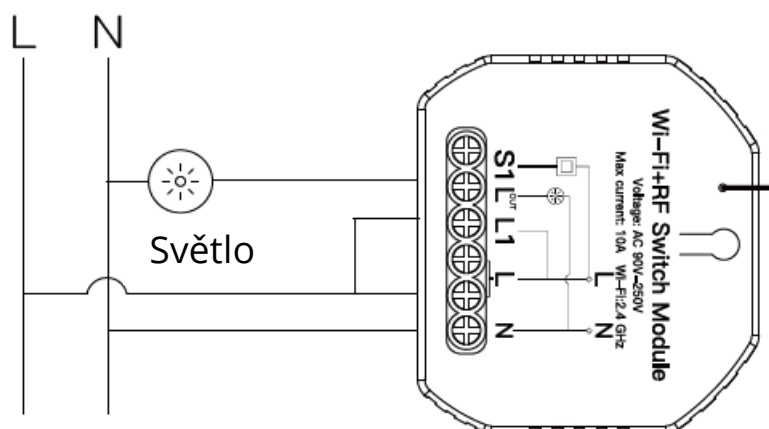

3. S 2cestnými spínači

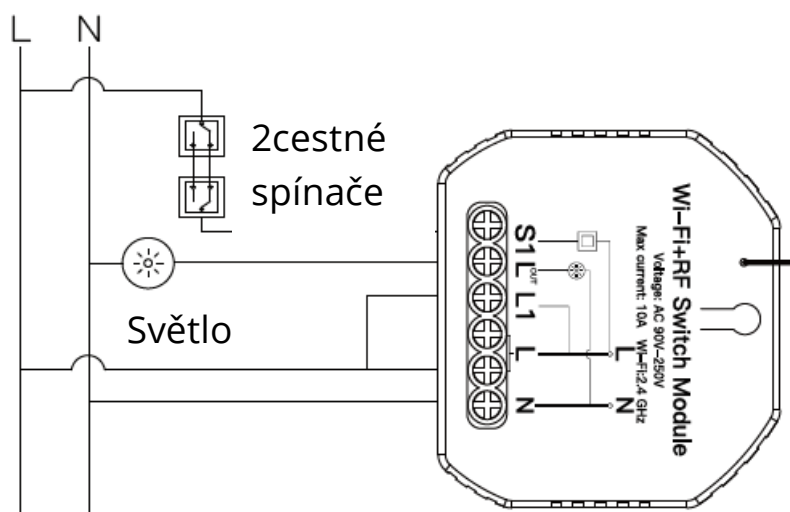

4. S nástěnnou zásuvkou

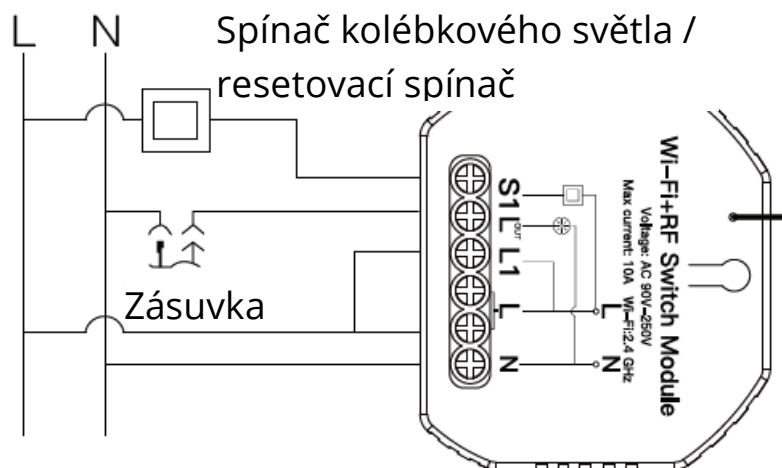

Pokyny a schémata zapojení

1. Před prováděním jakýchkoli elektroinstalačních prací vypněte napájení.
2. Připojte vodiče podle schématu zapojení.
3. Vložte modul do spojovací skříňky.

4. Připojte napájecí zdroj a postupujte podle pokynů ke konfiguraci modulu spínače.

POZNÁMKA:

Při konfiguraci položte smartphone blízko k přepínacímu modulu a ujistěte se, že máte min. 50% signál Wi-Fi.

Často kladené otázky

1: Co mám dělat, když nemůžu nakonfigurovat spínací modul?

- a. Zkontrolujte, zda je zařízení zapnuté.
- b. Ujistěte se, že váš mobilní a spínací modul jsou ve stejné síti Wi-Fi 2,4 GHz.
- c. Ujistěte se, že máte dobré podmínky pro připojení k internetu.
- d. Zkontrolujte, zda je heslo zadané v aplikaci správné.
- e. Zkontrolujte správnost zapojení.

2: Jaké zařízení lze připojit k tomuto spínači Wi-Fi?

Většinu domácích elektrických spotřebičů, jako jsou lampy, pračky, kávovary atd.

3: Co se stane, když se Wi-Fi vypne?

Stále můžete ovládat zařízení připojené k spínači pomocí tradičního spínače a jakmile je Wi-Fi znovu aktivní, zařízení připojené k modulu se automaticky připojí k vaší síti Wi-Fi.

4: Co mám dělat, když změním síť Wi-Fi nebo změním heslo?

Podle uživatelské příručky aplikace musíte znovu připojit modul spínače Wi-Fi k nové síti Wi-Fi.

5: Jak resetuji zařízení?

Zapněte / vypněte zařízení 5krát, dokud nepřetržitě nezazní zvukový signál na modulu.

Ruční ovládání

Terminál spínacího modulu si vyhrazuje přístup k funkci ručního potlačení pro zapnutí / vypnutí koncového uživatele.

Zapnutí / vypnutí funkce trvalého zapnutí / vypnutí.

POZNÁMKY:

1. Lze resetovat nastavení v aplikaci i spínač, poslední nastavení zůstává v paměti.
2. Ovládání aplikace se synchronizuje s ručním spínačem.

NÁVOD K POUŽITÍ APLIKACE



iOS Aplikace / Android Aplikace



1

Naskenujte QR kód a stáhněte si aplikaci Smart Life, nebo můžete také vyhledat klíčové slovo „Smart Life“ v App Store nebo Google Play a stáhnout aplikaci.


2



Přihlaste se a zaregistrujte svůj účet pomocí mobilního čísla nebo e-mailové adresy. Zadejte ověřovací kód zaslaný na váš mobilní telefon nebo poštovní schránku a poté zadejte přihlašovací heslo. Kliknutím na "Create Family" (Vytvořit rodinu) vstoupíte do aplikace.

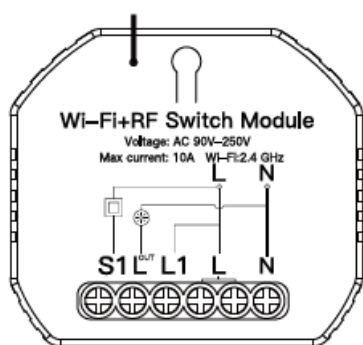

Kolébkový
spínač světla



Push nástěnný
spínač
(resetovací
spínač)

3


Metoda připojení Wi-Fi: (dvě metody párování)

Před spárováním dokončete zapojení spínacího modulu.


Metoda 1:

Spárování a vymazání kódu Wi-Fi s mezitím připojeným Bluetooth a Wi-Fi. (Nově Aktualizováno)


1. Zkontrolujte, zda je telefon připojen k Wi-Fi a Bluetooth.

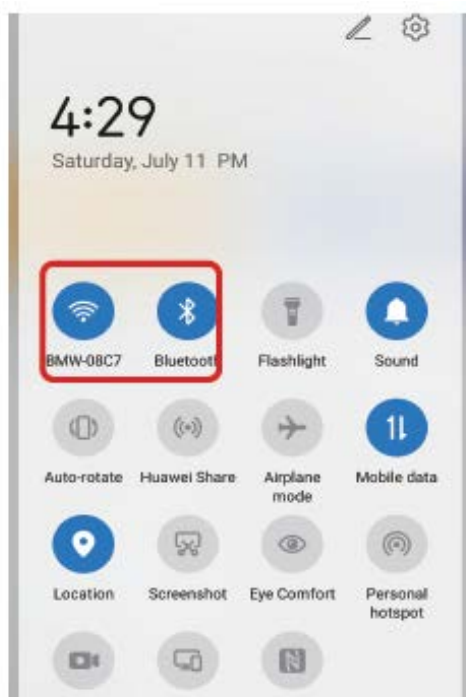



2. Otevřete aplikaci Smart Life / Tuya a klikněte na „+“, na obrazovce se automaticky zobrazí stránka s výzvou. Klikněte na “Go to add” (Přejít pro přidání).

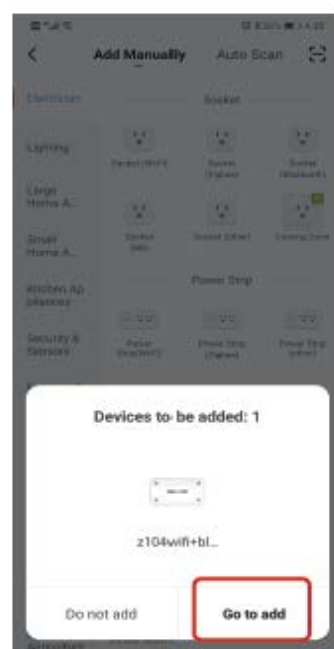


3. Vyberte zařízení, které chcete přidat, a klikněte na „+“.

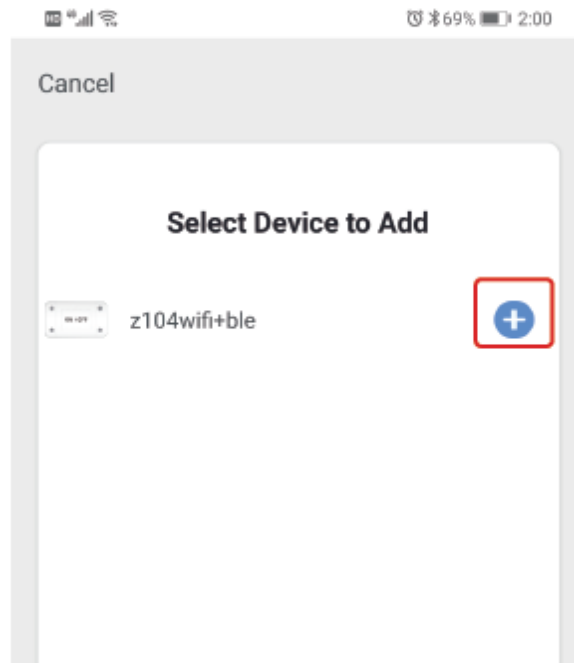

4. Zadejte heslo Wi-Fi a klikněte na “Next” (Další) a počkejte na dokončení připojení.

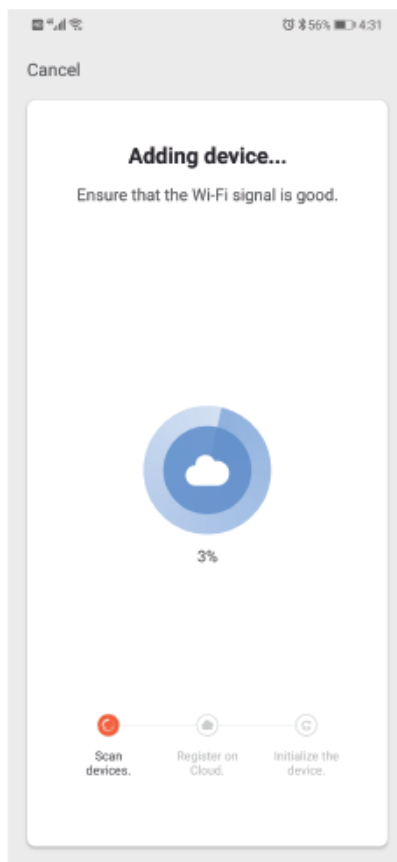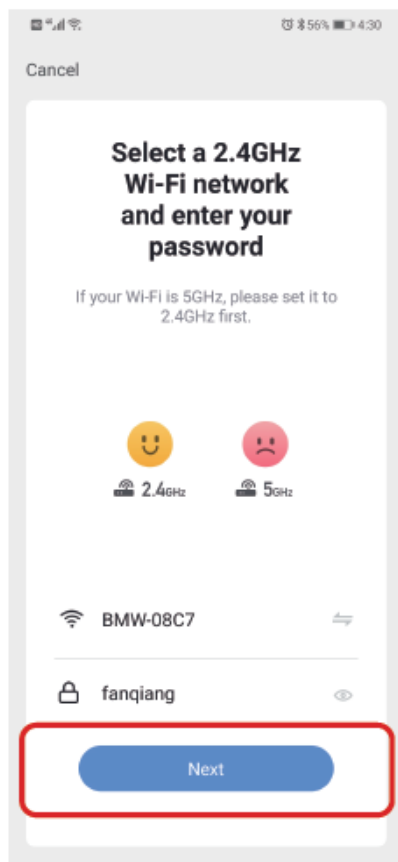

5. Přidejte zařízení úspěšně, můžete upravit název zařízení a vstoupit na stránku zařízení kliknutím na "Done" (Hotovo).

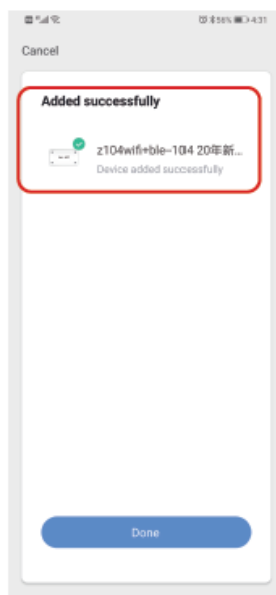

Jak resetovat kód Wi-Fi

a. **Pro resetovací spínač:** stiskněte spínací tlačítko 10krát, dokud nezazní pípnutí nepřetržitě a rychle jako Di-Di-Di... pro režim párování a resetování.

b. **U spínače kolébkového světla:** stiskněte spínací tlačítko 20krát, dokud nezazní pípnutí nepřetržitě a rychle jako Di-Di-Di... pro režim párování a resetování.

POZNÁMKA:

Tento modul spínače Wi-Fi + RF se mezitím hodí pro kolébkový spínač světla a resetovací spínač. Věnujte pozornost různým režimům párování.


Metoda 2:

Spárujte s tradiční metodou párování. Po dokončení zapojení spínacího modulu stiskněte tradiční spínač a přejděte do režimu párování.

a. **Pro resetovací spínač:** stiskněte spínací tlačítko 10krát, dokud nezazní pípnutí nepřetržitě a rychle jako Di-Di-Di... pro režim párování a resetování.

b. **U spínače kolébkového světla:** stiskněte spínací tlačítko 20krát, dokud nezazní pípnutí nepřetržitě a rychle jako Di-Di-Di... pro režim párování a resetování.

4

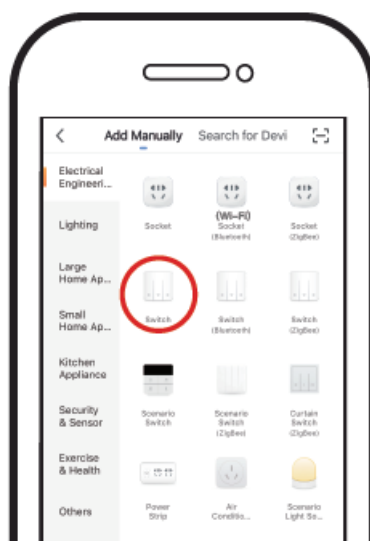


Otevřete aplikaci, vyberte „+“ vpravo nahoře a zvolte “Switch (Wi-Fi)” (Přepnout (Wi-Fi)) pro přidání zařízení.

5




Ujistěte se, že váš chytrý telefon a spínací modul Wi-Fi + RF jsou pod stejnou sítí Wi-Fi při připojení 2,4 GHz. Potvrďte, když kontrolka rychle bliká (dvakrát za sekundu).

6

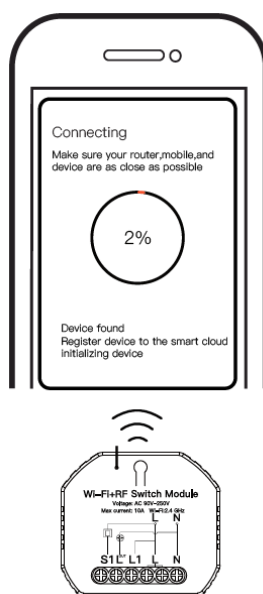


Připojení bude trvat asi 10–120 sekund, v závislosti na stavu sítě.

7

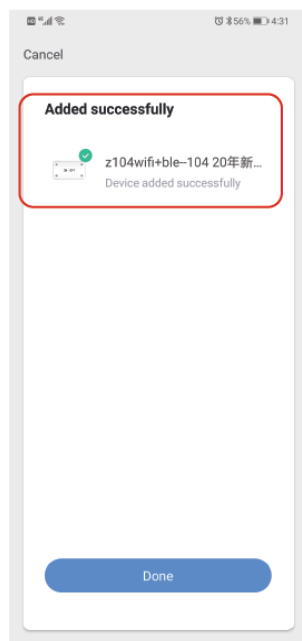

Po dokončení párování se spínač zobrazí v aplikaci.

8

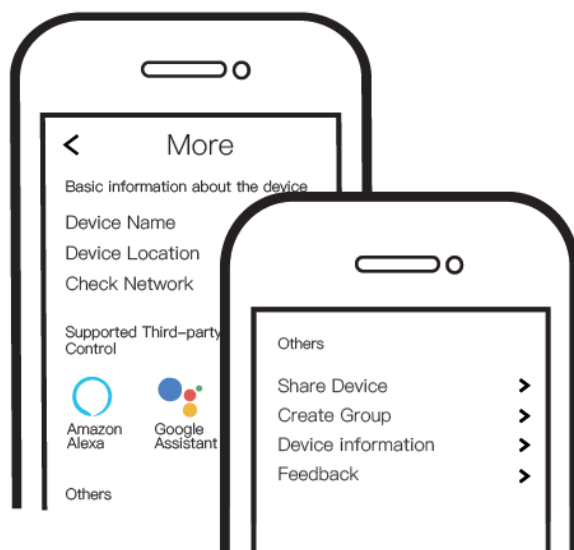

Připojte se k Amazon Alexa nebo Google Assistant pro hlasové ovládání nebo sdílejte zařízení se svou rodinou nebo přáteli.



Užijte si svůj Smart Life domácí automatizace pro ovládání osvětlení pomocí naší mobilní aplikace Vše v jednom (All-in-one mobile App), ať jste kdekoli na světě, nebo jednoduše hlasovým ovládáním, když pohodlně sedíte doma.

Spárování nebo vymazání RF kódu

1. Jak spárovat RF kód

- a. **Pro resetovací spínač:** stiskněte spínací tlačítko 5krát, dokud neuslyšíte Di-Di (2krát). Pak je spárování RF kódu úspěšné.
- b. **U kolébkového spínače:** stiskněte spínač 10krát (cyklus ZAP / VYP 5krát), dokud neuslyšíte Di-Di (2krát). Pak je spárování RF kódu úspěšné.

2. Jak vymazat RF kód

a. **Pro resetovací spínač:** stiskněte spínací tlačítko 5krát, dokud neuslyšíte Di-Di (2krát), počkejte 5 sekund, stiskněte spínací tlačítko ještě 5krát, dokud neuslyšíte Di-Di-Di-Di (4krát)). Poté je RF kód vymazán.

b. **U spínače kolébkového světla:** stiskněte spínač 10krát (cyklus ZAP / VYP 5krát), dokud neuslyšíte Di-Di (2krát), počkejte 5 sekund, stiskněte spínač 10krát (cyklus ZAP / VYP znovu 5krát), dokud neuslyšíte Di-Di-Di-Di (4krát). Poté je RF kód vymazán.

Jak dosáhnout asociace s více kontrolami

POZNÁMKA:

Před přidružením potvrďte, že jste úspěšně dokončili výše uvedenou metodu propojení Wi-Fi pro přidání tohoto Spínače do aplikace Smart Life.

1. Wi-Fi - přidejte další inteligentní Spínač ke stejné aplikaci Smart Life / Tuya. (Pokud již byl do aplikace přidán inteligentní Spínač, přejděte k dalšímu kroku.)

POZNÁMKA:

Není nutné zapojovat nový přidáný spínač ke světlu, pro zapojení jsou zapotřebí pouze L a N.


2. Poté uvidíte v aplikaci dvě zařízení a zadáním další operace kliknete na hlavní spínač (jako Jeden spínač gangu níže).



Nově přidaný
spínač

Hlavní spínač

3. Klikněte  v pravém horním rohu, vyberte „Multi-Control Association“ a poté klikněte na „+“ v pravém rohu.

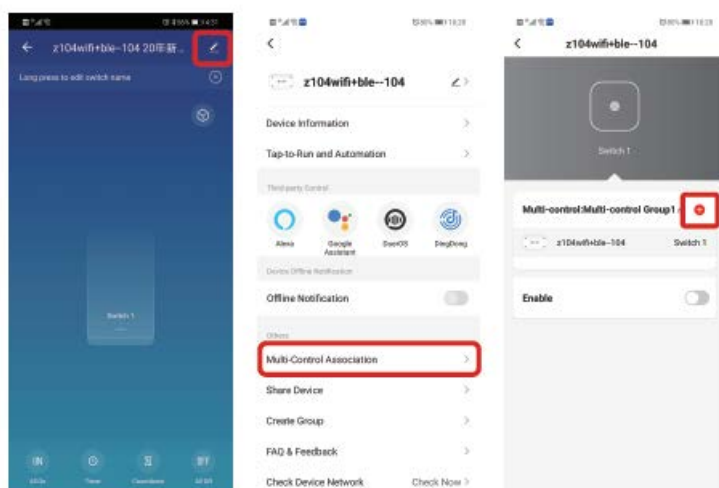

4. Vyberte spínač, který chcete přidružit, a poté vyberte spínač, kterým chcete ovládat stejné světlo.

5. Pak se vraťte na předchozí stránku, na stránce uvidíte dvě položky, jedna je váš hlavní spínač, druhá je ta, kterou právě přidružíte.


POZNÁMKA:

Potvrďte, že je přiřazený spínač povolen.



6. Nyní můžete své světlo ovládat dvěma spínači. Nepřidružujte další tlačítko ve stejném spínači pro ovládání více zařízení.

7. Pokud chcete přidat další třetí nebo více inteligentních spínačů pro ovládání světla, opakujte výše uvedené kroky. Výsledek uvidíte níže, když přidružíte další nový spínač.

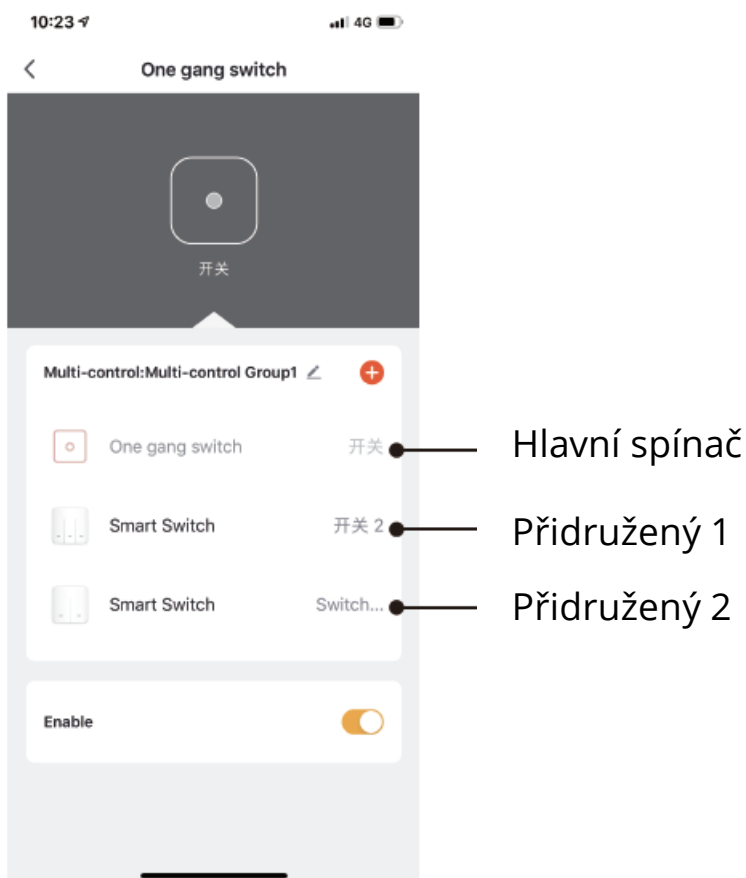

Záruční podmínky

Na nový výrobek pořízený v prodejní síti Alza.cz je poskytnuta záruka 2 roky. Pokud potřebujete opravu nebo jiné služby během záruční doby, kontaktujte přímo prodejce výrobku, je nutné předložit originální doklad o zakoupení s původním datem zakoupení. Kopie dokladů o zakoupení výrobku, změněné, doplněné, bez původních údajů nebo jinak poškozené doklady o zakoupení výrobku nebudou považovány za doklady prokazující zakoupení reklamovaného výrobku.

Za rozpor se záručními podmínkami, pro který nemusí být uplatněný reklamační nárok uznán, se považuje:

- Používání výrobku k jinému účelu, než pro který je výrobek určen nebo nedodržení pokynů pro údržbu, provoz a obsluhu výrobku.
- Poškození výrobku živelnou pohromou, zásahem neoprávněné osoby nebo mechanicky vinou kupujícího (např. při přepravě, čištění nevhodnými prostředky apod.).
- Přirozené opotřebení a stárnutí spotřebního materiálu nebo součástí během používání (jako jsou např. baterie atd.).
- Vystavení nepříznivému vnějšímu vlivu, např. slunečnímu a jinému záření či elektromagnetickému poli, vniknutí tekutiny, vniknutí předmětu, přepětí v síti, napětí vzniklému při elektrostatickém výboji (včetně blesku), chybnému napájecímu nebo vstupnímu napětí a nevhodné polaritě tohoto napětí, vlivu chemických procesů např. použitých napájecích článků apod.
- Pokud byly kýmkoliv provedeny úpravy, modifikace, změny konstrukce nebo adaptace ke změně nebo rozšíření funkcí výrobku oproti zakoupenému provedení nebo použití neoriginálních součástí.

EU Prohlášení o shodě

Identifikační údaje dovozce:

Dovozce: Alza.cz a.s.

Registrované sídlo: Jankovcova 1522/53, Holešovice, 170 00 Praha 7

IČO: 27082440

Předmět prohlášení:

Název: Wi-Fi + RF Spínací Modul

Model / Typ: MS-104

Výše uvedený produkt byl testován v souladu s normou (normami) používanými k prokázání souladu se základními požadavky stanovené směrnicí (směrnic):

Směrnice č. (EU) 2014/53/EU

Směrnice č. 2011/65/EU ve znění 2015/863/EU

Praha, 23.8.2020



WEEE

Tento produkt nesmí být likvidován jako běžný domácí odpad v souladu se směrnicí EU o likvidaci elektrických a elektronických zařízení (WEEE – 2012/19/EU). Místo toho musí být vrácen v místě zakoupení nebo odevzdán ve veřejné sběrně recyklovatelného odpadu. Správnou likvidaci přístroje pomůžete zachovat přírodní zdroje a napomáháte prevenci potenciálních negativních dopadů na životní prostředí a lidské zdraví. Další podrobnosti si vyžádejte od místního úřadu nebo nejbližšího sběrného místa. Při nesprávné likvidaci tohoto druhu odpadu mohou být v souladu s národními předpisy uděleny pokuty.

