



GameSir GK300

Wireless Mechanical Gaming Keyboard

User's guide

Importer

Alza.cz a.s.

Jankovcova 1522/53

Holešovice 170 00 Prague 7

www.alza.cz

Dear customer,

Thank you for purchasing our product. Please read the following instructions carefully before using for the first time and keep this user manual for future reference. Pay particular attention to the safety instructions. If you have any questions or comments about the device, please contact the customer line. Customer line, available 24 hours a day: +44 (0)203 514 4411, www.alza.co.uk.

Important: Please fully charge GameSir GK300 wireless mechanical gaming keyboard before the first use.

PACKAGE CONTENTS

- GameSir GK300 Wireless Mechanical Gaming Keyboard
- Agility X 2.4GHz Wireless Dongle
- Micro-USB Cable (3.28 ft.)
- User Manual

PRODUCT REQUIREMENTS

- Windows 7 (or higher)/ macOS / Linux
- Android 4.0 (or higher) / iOS 7.0 (or higher)
- * PC with USB port


REGISTRATION

Register your GameSir ID online at <https://gamesir.hk/> to get real-time information on your product's warranty status and a series of exclusive benefits from GameSir.

YOUR BENEFITS

- 12 months limited manufacturer's warranty
- Free online technical support at <https://gamesir.hk/> (Supports English and Japanese)

DEVICE LAYOUT

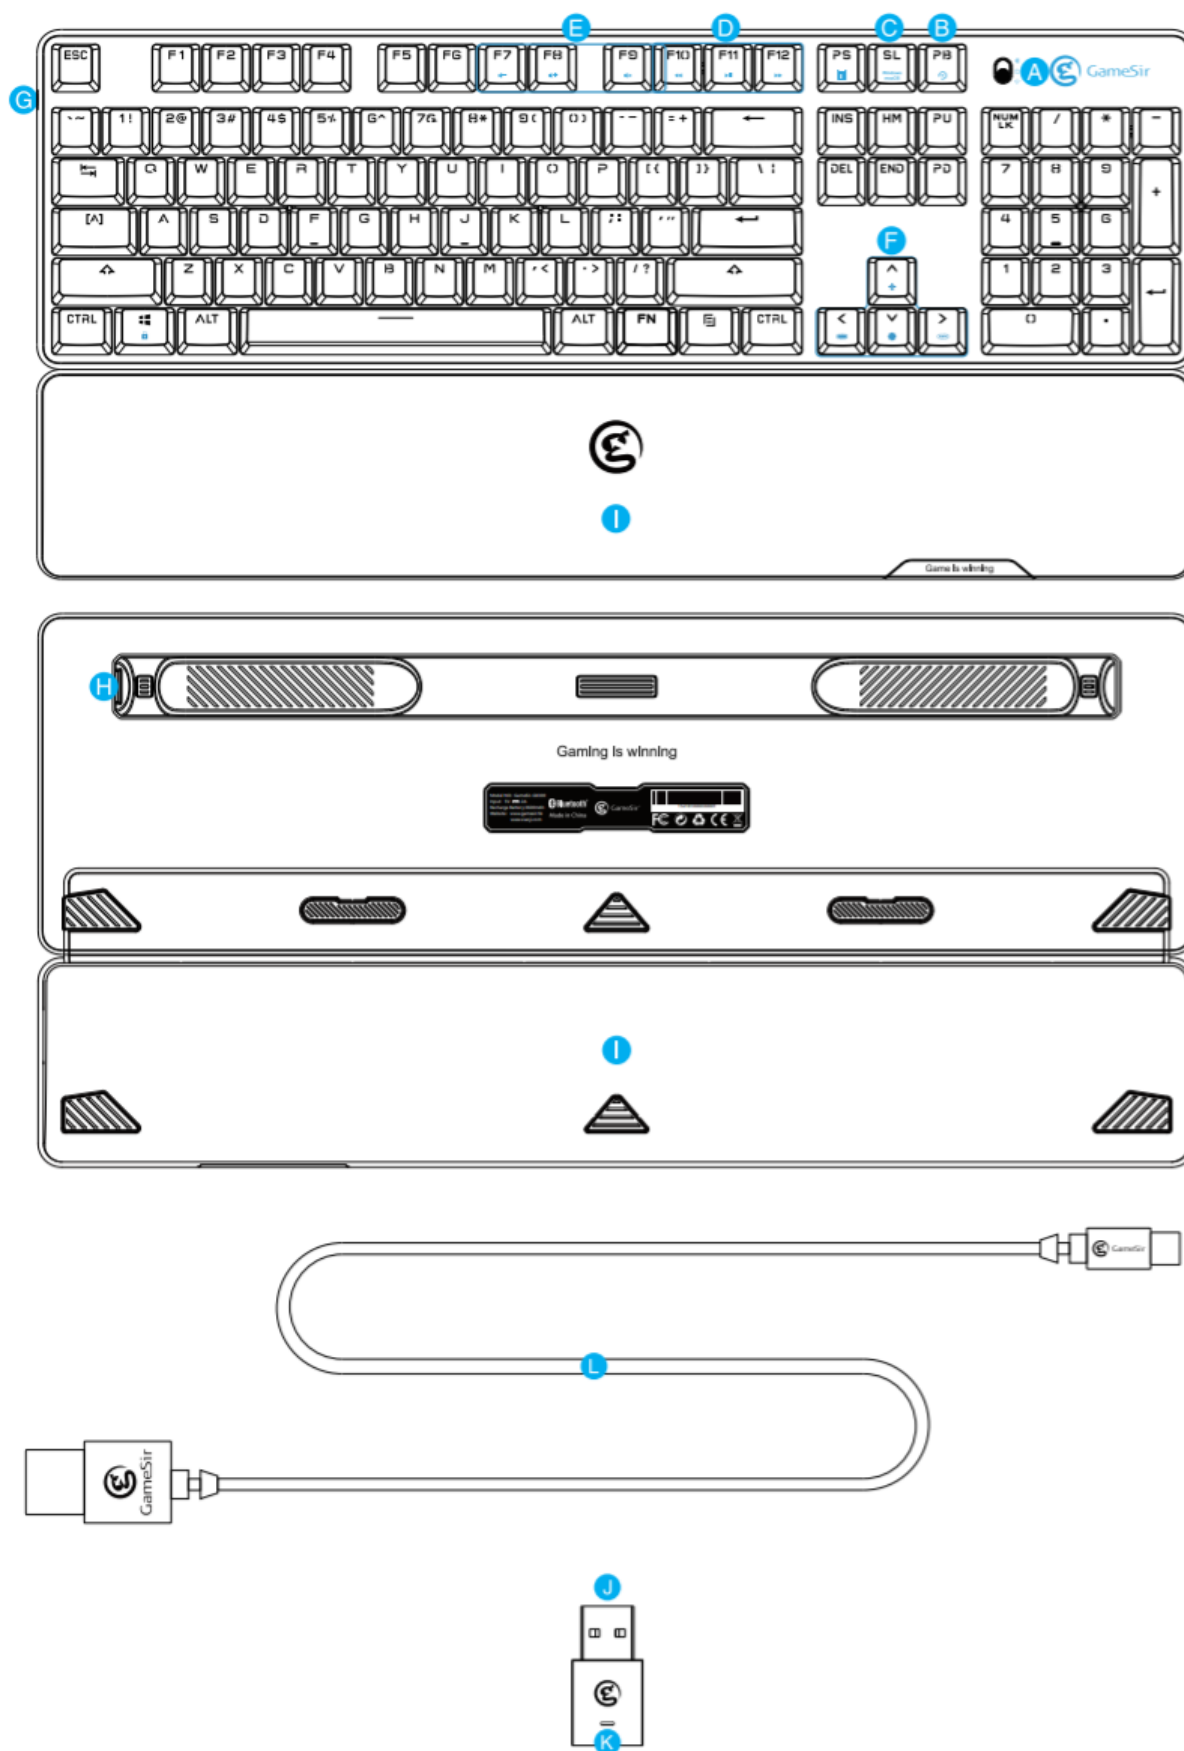

- A. Power switch & LED indicator
- B. Forced pairing
- C. Windows/macOS switch
- D. Media control area
- E. Volume control area
- F. Lighting effects control area
- G. Micro-USB charging port
- H. 2.4GHz dongle box
- I. Removable palm rest
- J. Agility X 2.4GHz wireless dongle
- K. Dongle indicator light
- L. Micro-USB cable (3.28 ft.)

CONNECTION

Connect PC via 2.4GHz wireless dongle

- a. Switch down to button, the LED indicator light will flash in green, GameSir GK300 wireless mechanical gaming keyboard is ready to be connected.
- b. Plug 2.4GHz wireless dongle into Windows PC's USB port, the indicator lights of GameSir GK300 wireless mechanical gaming keyboard and Agility X 2.4GHz wireless dongle will stay green.
- c. Wait until the LED indicator of GameSir GK300 wireless mechanical gaming keyboard flashes in green. The LED indicator of 2.4GHz wireless dongle will be off after 1 minute. The connection is complete.

Notice: If GameSir GK300 wireless mechanical gaming keyboard fails to connect automatically, simultaneously press FN+Reset button for 3 seconds to reconnect.

Connect PC via Bluetooth 4.2

- a. Switch up to button, the LED indicator light will flash in blue, GameSir GK300 wireless mechanical gaming keyboard is ready to be connected.
- b. Turn on Bluetooth in Windows PC, search GameSir GK300 wireless mechanical gaming keyboard to pair and connect.
- c. Wait until the LED indicator of GameSir GK300 wireless mechanical gaming keyboard flashes in blue. The connection is complete. GameSir GK300 wireless mechanical gaming keyboard will reconnect to the same PC automatically.

Notice: If GameSir GK300 wireless mechanical gaming keyboard fails to connect automatically, simultaneously press FN+Reset button for 1 second to reconnect.

Connect Android/iOS device via Bluetooth 4.2

- a. Switch up to button, the LED indicator light will flash in blue, GameSir GK300 wireless mechanical gaming keyboard is ready to be connected.
- b. Turn on Bluetooth on your mobile phone, search GameSir GK300 wireless mechanical gaming keyboard to pair and connect.
- c. Wait until the LED indicator of GameSir GK300 wireless mechanical gaming keyboard flashes in blue. The connection is complete. GameSir GK300 wireless mechanical gaming keyboard will reconnect to the same Android/iOS device automatically.

Notice: If GameSir GK300 wireless mechanical gaming keyboard fails to connect automatically, simultaneously press FN+Reset button for 1 second to reconnect

AUTOMATIC POWER OFF / LIGHTING

2.4GHz wireless mode

- When GameSir GK300 wireless mechanical gaming keyboard is disconnected under 2.4GHz wireless mode, its backlight will automatically power off within 60 seconds under no operations and be in sleep mode within 120 seconds. Please power on and reconnect.
- When GameSir GK300 wireless mechanical gaming keyboard is connected under 2.4GHz wireless mode, its backlight will automatically dim within 60 seconds under no operations and be in sleep mode within 20 minutes. Press any key to awake the keyboard.

Bluetooth mode

- When GameSir GK300 wireless mechanical gaming keyboard is disconnected under Bluetooth mode, its backlight will automatically power off within 60 seconds under no operations and be in sleep mode within 120 seconds. Please power on and reconnect.
- When GameSir GK300 wireless mechanical gaming keyboard is connected under Bluetooth mode, its backlight will automatically dim within 60 seconds under no operations and be in sleep mode within 20 minutes. Press any key to awake the keyboard.

POWER INSTRUCTIONS

Low power condition

- When GameSir GK300 wireless mechanical gaming keyboard is in low power condition (15% and below), LED indicator will flash quickly in red.
- When GameSir GK300 wireless mechanical gaming keyboard is in low power condition (5% and below), it will automatically power off for power protection.

Charging statement

- When GameSir GK300 wireless mechanical gaming keyboard is being charged, LED indicator will stay red.
- When GameSir GK300 wireless mechanical gaming keyboard is fully charged, LED indicator will be off.

* Lighting effects of charging indicator and mode indicator have no conflict.

Warranty Conditions

A new product purchased in the Alza.cz sales network is guaranteed for 2 years. If you need repair or other services during the warranty period, contact the product seller directly, you must provide the original proof of purchase with the date of purchase.

The following are considered to be a conflict with the warranty conditions, for which the claimed claim may not be recognized:

- Using the product for any purpose other than that for which the product is intended or failing to follow the instructions for maintenance, operation and service of the product.
- Damage to the product by a natural disaster, the intervention of an unauthorized person or mechanically through the fault of the buyer (e.g. during transport, cleaning by inappropriate means, etc.).
- Natural wear and aging of consumables or components during use (such as batteries, etc.).
- Exposure to adverse external influences, such as sunlight and other radiation or electromagnetic fields, fluid intrusion, object intrusion, mains overvoltage, electrostatic discharge voltage (including lightning), faulty supply or input voltage and inappropriate polarity of this voltage, chemical processes such as used power supplies, etc.
- If anyone has made modifications, modifications, alterations to the design or adaptation to change or extend the functions of the product compared to the purchased design or use of non-original components.

This product has been tested in accordance with the standards used to demonstrate compliance with the essential requirements set out in the relevant directives. You can find the declaration of conformity on the alza.cz website.



WEEE

This product must not be disposed of as normal household waste in accordance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE - 2012/19 / EU). Instead it shall be returned to the place of purchase or handed over to a public collection point for the recyclable waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. Contact your local authority or the nearest collection point for further details. Improper disposal of this type of waste may result in fines in accordance with national regulations.

