

ViewSonic  PROJECTOR
LS700-4K


Key Features

- 3,300 ANSI Lumens
- 4K UHD with HDR support
- 2nd Generation Laser Phosphor Technology
- Movie Mode with Notch Filter Technology
- Cinema SuperColor Technology with Rec.709



Product Description

Combining laser technology with 4K Ultra HD resolution and 3,300 lumens of high brightness, the LS700-4K projector delivers a premium home theater experience in any room, day or night. Utilizing the latest laser light technology that lasts up to 20,000 hours, the LS700-4K delivers long-term enjoyment for movies, games, and other multimedia entertainment. Featuring HDR compatibility, exclusive Cinema SuperColor Technology, and true Ultra HD 3840 x 2160 resolution, the LS700-4K delivers a breathtaking home cinema experience you expect to only get at the movie theater. With high brightness and optimized sound, this projector provides bright visuals and immersive audio in nearly any room or environment, while an ultra-low input latency ensures faster frame-by-frame action and smooth gameplay without delay. Set-up is a breeze too: 1.3x optical zoom and versatile connectivity options allow for more flexible mounting and easy installation. For an amazing home theater viewing experience with lifelike color and razor-sharp details, the LS700-4K delivers.

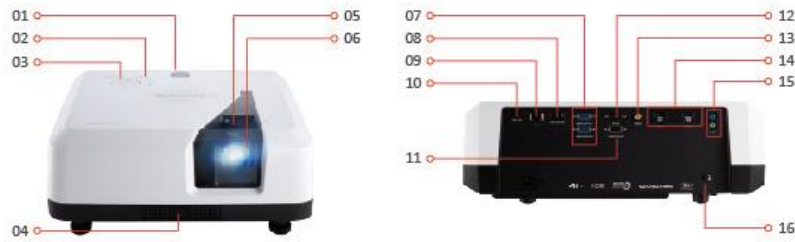

- 1. Power Key/Top IR
- 2. LED indicator
- 3. Keypad
- 4. Front IR
- 5. Zoom/Focus
- 6. Lens
- 7. Computer In

- 8. USB 5V/1.5A OUT
- 9. LAN
- 10. Mini USB
- 11. Monitor out
- 12. RS-232
- 13. Video
- 14. HDMI

- 15. Audio in/out
- 16. Kensington Lock

Visit Us  www.viewsonic.com

SPECIFICATION

Native Resolution:	3840x2160
DMD Type:	DC3
Brightness:	3300 ANSI Lumens
Contrast Ratio:	3000000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Laser Phosphor system
Light Source Life (Normal):	up to 20000
Lamp Watt:	Nichia MCD
Lens:	F=1.9-2.09, f=12-15.6mm
Projection Offset:	100%+/-5%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3X
Digital Zoom:	0.8x- 2.0x
Image Size:	60"-300"
Throw Distance:	1.5-8.79m (100"@2.5m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	34dB
Audible Noise (Eco):	32dB
Input Lag:	66ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p,2160P
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	2
Composite:	1
HDMI:	2 (HDMI 2.0/HDCP 2.2 x1, HDMI2.0/HDCP 1.4 x1)
Audio-in (3.5mm):	1
USB Type A:	1 (USB2.0 Reader, share with power)
RJ45 Input:	1 (LAN control)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	2W
USB Type A (Power):	1 (5V/ 1.5A)

CONTROL

RS232 (DB 9-pin male):	1
RJ45:	1
USB Type Mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 260W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	7.14Kg
Gross Weight:	9.11Kg
Dimensions (WxDxH) with Adjustment Foot:	396x314x157mm
Packing Dimensions:	499x402x261mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Total 22 languages
User Guide Language:	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	1