



### 27" WQHD IPS panel with an ergonomic stand and USB-C Connectivity

Supplying USB Type-C connectivity, the XUB2792QSC allows you to simplify your workspace by using a single cable to connect, power (65W power delivery) and charge the notebook from the monitor, providing the foundation for hybrid office spaces. The IPS panel and WQHD (2560x1440) resolution offer noticeably sharper images, excellent colour performance, wide viewing angles, making this ideal for productivity solutions, demanding office applications as well as CAD. Equipped with speakers, headphone socket, a blue light reducer function to reduce eye fatigue and an ergonomic height adjustable stand for optimal user comfort.

TCO conformity and ultra-low power consumption make this XUB2792QSC an ideal display for the modern environmentally conscious, yet productive workplace.



Technologie IPS

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



USB-C

## 01 CHARAKTERISTIKA OBRAZU

Design	3-side borderless
Úhlopříčka monitoru	27", 68.5cm
Panel	IPS Panel Technology LED, matte finish
Nativní rozlišení	2560 x 1440 @75Hz (3.7megapixel WQHD)
Formát obrazu	16:9
Jas	350 cd/m <sup>2</sup>
Kontrast	1000:1
Pokročilý kontrast	80M:1
Čas reakce (GTG)	4ms
Úhel sledování	horizontální/vertikální: 178°/178°, na parvo/na lefo: 89°/89°, nahoru/dolů: 89°/89°
Barevná podpora	16.7mln (sRGB: 99%; NTSC: 72%)
Horizontalfrequenz	30 - 120kHz
Arbeitsfläche H x B	596.7 x 335.7mm, 23.5 x 13.2"
Velikost bodů	0.233mm
Barva	matná, černá

## 02 ROZHRANÍ / KONEKTORY / OVLÁDÁNÍ

Vstupní porty	HDMI x1 DisplayPort x1 USB-C x1 (Power delivery 65W)
USB HUB	x2 (v.3.0 (DC5V, 900mA))
HDCP	ano
Konektor pro sluchátka	ano

## 03 VLASTNOSTI

Redukce modrého světla	ano
Flicker Free LED	ano
Extra	i-style Colour
Jazyky OSD	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Kontrolní tlačítka	Power, Menu/ Select, Up/ Volume, Down/ ECO, Exit, Input
Nastavitelné parametry	picture adjust (brightness, contrast, Eco, blue light reducer, ACR, OD), colour settings (colour temp., user preset, i-Style colour), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, MST, USB, RGB Range, information), input select, audio settings (volume, mute)
Reproduktory	2 x 2W
Výhoda	Kensington-lock™ připraven, DDC2B, Mac OSX

## 04 MECHANICKÉ ČÁSTI

Úpravy polohy	výška, swivel, náklon, Pivot (rotace na obě strany)
Výškově nastavitelné	150mm
Otočný (Pivot)	90°
Úhel otočení	90°; 45° na lefo; 45° na parvo
Úhel náklonu	23° nahoru; 5° dolů
VESA	100 x 100mm
Systém správy kabelů	ano

## 05 ZAHRNUTÉ PŘÍSLUŠENSTVÍ

Kabely	napájecí, HDMI, DP, USB-C
Ostatní	uživatelský manuál, instrukce bezpečnosti

## 06 POWER-MANAGEMENT


Napájecí zdroj:	interní
Napájení	AC 100 - 240V, 50/60Hz
Odběr energie:	21W typisch, 0.5W odpočinek, 0.3W vypnutý

## 07 UDRŽITELNOST

Předpisy	TCO Certified, CE, TÜV-GS, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, ENERGY STAR®, UKCA
Energetická třída (Regulation (EU) 2017/1369)	E
REACH SVHC	nad 0.1% olova

## 08 ROZMĚRY / HMOTNOST

Rozměry výrobku Š x V x D	613.5 x 394.5 (544.5) x 209.5mm
Rozměry balení Š x V x D	693 x 170 x 446mm
Váha (bez balení)	6.8kg
Váha (s balením)	8.4kg
EAN code	4948570121663

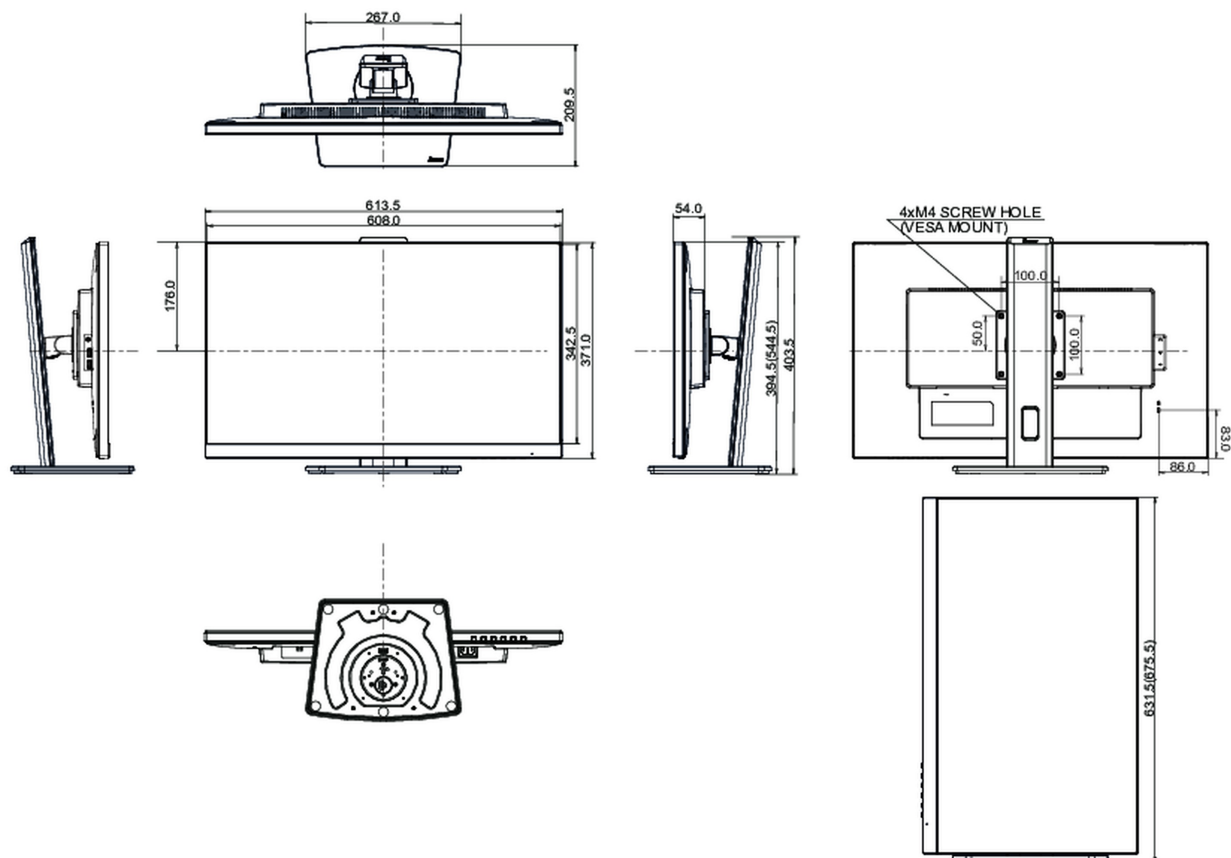

Všechny ochranné známky jsou registrovány a chráněny. Vyhrazené právo na změny. Veškeré ploché panely LCD splňují normu ISO-9241-307:2008 v oblasti počtu vadných pixelů.

© Iiyama Corporation. All rights reserved.