

SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

The ideal docking solution for dual 4K Ultra HD monitors

Features of the SD4750P include the ability to select between HDMI 2.0 and DP 1.2++ video ports, six USB ports, 85W of power delivery, Kensington DockWorks™ software and a three-year warranty.

Features include:

- Ultra HD video for up to two monitors
- Flexibility to select between HDMI 2.0 and DP 1.2++
- Universal docking station with support for USB-C and USB-A laptops
- Six USB ports
- · 85W of power delivery
- Free DockWorks™ software
- · Three-year warranty





Kensington

SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721



Dual 4K video output (HDMI 2.0 and DP 1.2 @ 60Hz)

Delivers Ultra HD images. Four video ports allow users the ability to select between HDMI 2.0 and DP 1.2++ without the need for cumbersome adapters.



Universal Docking Station

A smart technology investment for evolving and mixed computer environments, the SD4750P connects to any USB-C or USB 3.0 laptop, and supports Windows, Mac and Chrome operating systems.



Six USB ports (USB-C and USB 3.0)

Front: 1x USB-C 3.1 Gen1 at up to 5V/3A and 1x USB-A 3.1 Gen1 at up to 5V/2.4A

Back: 4x USB-A 3.1 Gen1 at up to 5V/0.9A



85W power delivery

Ideal for devices that require higher power. For USB 3.0 laptops requiring power delivery, see our optional 60W power splitter (K38310EU).



1m (3.28ft) USB-C to USB-C cable with USB 3.0 adapter included

Eliminates the frustration of compatibility issues. Ideal for graphic designers, photographers and multi-user/hot desk office environments.



Free Kensington DockWorks™ Software

Enables the best connection, performance and security from your Kensington dock.



Three-year warranty


Rest assured knowing you're covered by Kensington.

Kensington

SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

Back

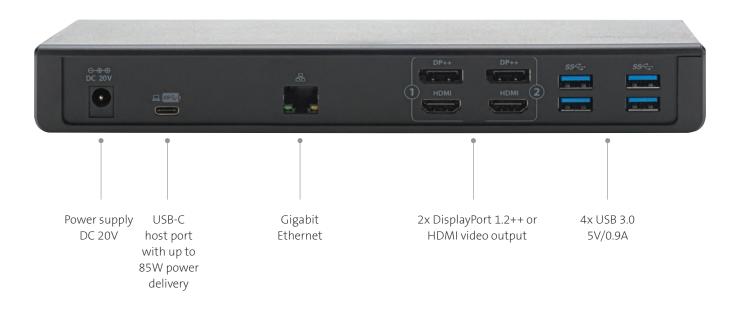

Front





SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

	Operating systems supported	Windows 7+, macOS 10.14+, Chrome OS 44+
	Plug & Play	DisplayLink driver installation required download software from Kensington.com or via Windows update
	System resource requirement	CPU: Intel® Core™ i5 6th generation or above Memory: 8GB or above GPU: Intel® HD Graphics 620 or above
	USB-C Power Delivery	5V/ 9V/ 12V/ 15V/ 20V @ 3A (up to 85W, 20V @ 4.25A)
USB interface		
	Type of USB connector	USB-C & USB 3.0 connector
	Host connector	Support USB 3.1 Gen 1 Type A & Type-C
USB connections		
	Front ports	1 x USB 3.1 Gen 1 Type A, support BC1.2 (5V/1.5A) & Apple charging (5V/2.4A), 1 x USB 3.1 Gen 1 Type C (5V/3A
	Back ports	4 x USB 3.1 Gen 1 Type A (5V/0.9A)
Network connections		
	Ethernet port	RJ45
	Compatible ethernet speeds	10/100/1000Mbps
Host connectivity		
	Host docking connector	USB-C with Power Delivery up to 85W, USB 3.0
Video connections		
	Video connectors	2 x HDMI v2.0 and 2 x DisplayPort 1.2++
	Maximum resolution supported	Single or dual monitors: 4096 x 2160 @ 60Hz
	HDCP support	Yes
Audio connections		
	Audio connectors	3.5mm audio for headphone/speaker; 3.5mm audio for microphone
	Audio channels supported	Stereo LR

Kensington

	USB data encryption	HDCP 2.2 encryption over USB 2.0 & 3.1
ED indicator		
	Blue LED	Power indicator
	Green LED	USB connection indicator
Material specifications		
	Exterior enclosure	PC ABS with texture
	Bottom metal base plate	Sheet metal
	Product colour PMS	Black
Other features		
	Kensington Security Slot	Yes
Product dimensions		
	Unit weight	0.395kg (0.87lbs)
	Unit dimensions without peripherals	250 x 82.5 x 34.4mm (13.78 x 3.25 x 1.35in)
	Enclosure colour & material	PMS Black, PC ABS
	Desktop footprint	206.25cm² (32in²)
Packaging dimensions		
	Packaging style	Bulk package (K39105EU)
	Packaging dimensions	118 x 85 x 273mm (4.65 x 3.35 x 10.75in)
	Packaging weight	1.345kg (2.97lbs)
	Master carton	4 pcs Width: 348mm (13.7in) Depth: 293mm (11.5in) Height: 126mm (4.96in) Weight: 5.65kg (12.46lbs)
	Package content	1 x SD4750P Dock 1 x USB-C to USB-C cable with USB-A tether – 1m (3.28ft) 1 x power supply 1 x IG (instruction guide) 1 x warranty card 1 x compliance sheet



Power and environmental

Power adapter rating	Input: 100-240V; 1.8A Output: 20V DC; 6.75A (135W)
Operating temperature	0 to 40° C (32 to 104° F)
Storage temperature	-30 to 65° C (-22 to 149° F)
Relative humidity	55% operating temperature @ 25°C

Country of origin, regulatory, and warranty

Country of origin	China
Certifications & compliance	FCC, IC, CE EMC, RCM, VCCI, RoHS, ACCO RSL
Warranty	3-year limited – worldwide



