



Mi True Wireless Earphones 2 Basic User Manual




Read this manual carefully before use, and retain it for future reference.

Product Overview



Charging Case

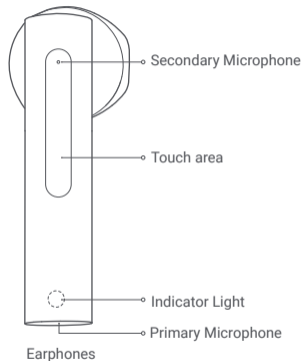

Earphones

Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.

Instructions

Charging

● Charging the earphones

When the earphones are placed in the charging case, they will automatically start charging.

● Charging the charging case

The indicator of the charging case is white during charging and goes off once it is fully charged.

Checking battery level

● Checking the battery level of the earphones

After connecting the earphones to a phone, you can check the earphone's battery level on the phone's status bar.

Note: The phone's status bar always displays the battery level of the earphone with the lowest battery level. This feature is not supported by some phones.

● Checking the battery level of the charging case

Open the lid of the charging case, or place the earphones into the charging case:

1) When the indicator light of the charging case stays lit for 5 seconds, it means the battery is sufficient.

2) The indicator of the charging case is blinking white, which indicates that the level of the charging case is low. Please charge immediately.

● Checking the battery level by a Mi phone

After successfully connecting to a phone, place the earphones into the charging case and close its lid. Make sure the Bluetooth function is enabled on your Mi phone. Hold your phone close to the charging case, then open the case's lid. A notification will appear on the phone, then you can check the battery level of the earphones and the charging case.

Note: When checking the battery level on your phone, please update your Mi phone to the latest stable version. This feature is currently only supported by some Mi phones.

Turning on

When opening the charging case, the earphones will automatically turn on.

Note: When using the earphones for the first time, place them in the charging case and close the lid to activate them.

Sleep Mode

Place the earphones back into the charging case and close the lid, the earphones will disconnect and go into sleep mode automatically.

Wearing

Take the earphones out of the charging case and insert them into your ears according to the left (L) and right (R) marks.

Note: After using the earphones, place them back into the charging case. This will extend their lifespan and help you avoid losing or misplacing them.

Connecting

Connecting the earphones to a new device

1) Place the earphones into the charging case, press and hold the touch area of either earphone for 3 seconds. The indicator of the earphones is blinking white and the earphones are waiting for a connection.

2) Enable the devices Bluetooth, then locate and connect to "Mi TW Earphones 2 Basic". If a passcode is requested, enter "0000".

● Connecting the earphones with a Mi phone

Place the earphones into the charging case and close its lid. Make sure the Bluetooth function is enabled on your Mi phone. Hold your phone close to the charging case, then open the case's lid. Follow the

on-screen instructions of the phone to connect to the earphones.

Note: The feature of fast connection is currently only supported by some Mi phones, please update your Mi phone to the latest stable version.

● Connection interrupted

When your device is out of wireless range of the earphones or its Bluetooth function is disabled, the earphones will automatically enter the awaiting connection mode. If the earphones are not connected to any device within five minutes, they will enter sleep mode.

● Automatic connection

When the earphones are in the charging case, opening the lid of the charging case will automatically connect the earphones to the most recently used Bluetooth device. If the earphones are not connected to any device within five minutes, they will enter sleep mode.


Note: If the earphones cannot automatically connect to a device, you will need to manually connect the earphones to the desired device via the device's Bluetooth settings.

Due to the connection characteristics of the Bluetooth signal, in dense environments with 2.4 GHz electromagnetic signal interferences, there may be occasional disconnects or no sound.

Clearing connection history

- 1) Place the left and the right earphone into the charging case.
- 2) Simultaneously press and hold the touch areas of the left and the right earphones for seven seconds, then release the touch areas once the indicators of the earphones light up in white.
- 3) The earphones have been reset and the connection history has been cleared. The indicators of the earphones blink white and the earphones are waiting for a connection.

Function overview




- Incoming calls
Gently tap either one of the earphones twice: Answer/End calls
- Music and voice assistant
While wearing both earphones:
Gently tap the right (R) earphone twice: Play/Pause Music
Gently tap the left (L) earphone twice: Access the voice assistant
Taking out the earphone: Pause music
While wearing one earphone: Gently tap the earphone twice: Play/Pause music

Notes:

- 1) The voice assistant can be used only if your device supports it and this function needs to be granted permission on the device.
- 2) When only using the left earphone, place the right earphone into the charging case and close the lid.

Specifications

Model: TWSEJ08WM Net Weight: 48 g Input: 5 V 1 A
Charging Port: Type-C Impedance: 32 Ω 
Charging Time: Approx. 1,5 h Wireless Connectivity: Bluetooth 5.0
Bluetooth Profiles: BLE/HFP/HSP/A2DP/A/VRCP
Supported Audio Codecs: SBC/AAC
Wireless Range: 10 m (open space without obstacles)
Earphone's Battery Life (standalone): Approx. 5 h
Total Battery Life (with charging case): Approx. 20 h
Bluetooth Operation Frequency: 2402-2480 MHz (for EU)
Maximum Transmit Power for BT: 10 dBm (for EU)
Maximum Transmit Power for BLE: 10 dBm (for EU)

WEEE Information



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.



Hereby Tiinlab declares that the radio equipment type TWSEJ08WM is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
<http://www.mi.com/global/service/support/declaration.html>

Safety Caution

- Do not expose batteries or battery packs to excessive heat such as sunshine, fire or the like.
- Replacement of a battery with an incorrect type that can defeat a safeguard (such as catching fire, explosion, leakage of corrosive electrolyte etc.).
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding that can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
- Risk of explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions.
- The product operation maximum ambient temperature is 40°C.



To prevent possible hearing damage, do not listen at high volume levels for long periods.



The symbol indicates DC voltage

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Xiaomi Inc. is under licence. Other trademarks and tradde names are those of their respective owners.

Manufactured for: Xiaomi Communications Co., Ltd.
Manufactured by: Tiinlab Acoustic Technology Limited (a Mi Ecosystem company)

Address: Tianliao Building 1403, Tianliao Industrial Area A, Taoyuan Street, Nanshan District, Shenzhen 518055, China
For further information, please go to www.mi.com