

ZYXEL



WAH7608

4G LTE Portable Router




Quick Start Guide

1 Hardware Installation

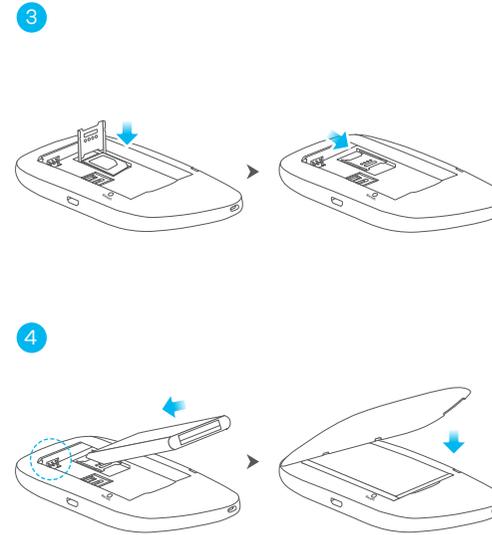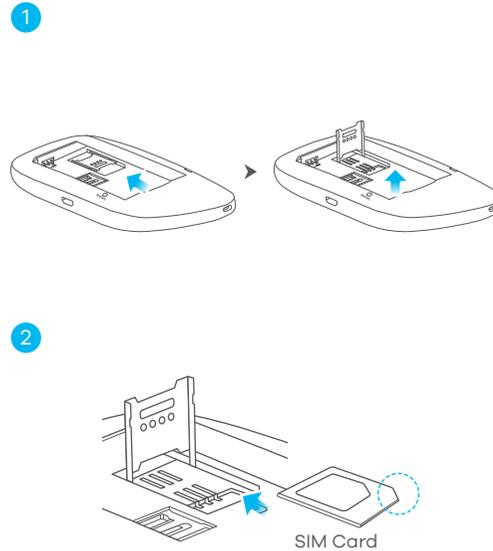

2 Check Internet Connection

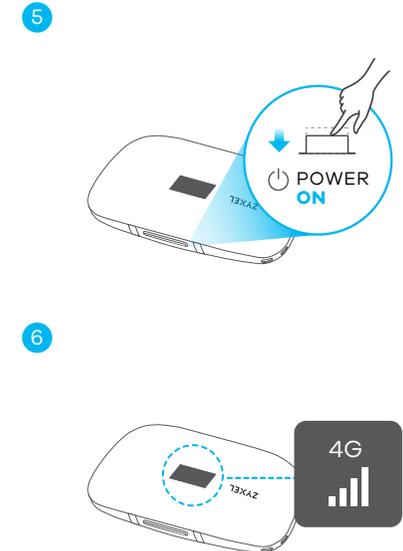

Package Contents


- Device
- Battery
- USB cable
- Adapter
- QSG
- Declaration of Conformity
Safety Warning
Warranty Card

- EN** ① Remove the lid. Push the metal latch in the SIM slot down to unlock it. Then lift the latch.
- ② Gently place the Mini SIM card into the SIM Card slot.
- Note 1:** If you have a Micro or Nano SIM card, use a SIM card adapter to correctly fit it into the Mini SIM Card slot.
- Note 2:** Make sure the SIM card is placed correctly to avoid damage to the pins.

- EN** ③ Drop the latch and push it upwards to lock the SIM card into place.
- Note:** To Insert a Micro SD memory card repeat steps 1-3 in the Micro SD card slot.
- ④ Gently insert the battery and close the WAH7608 with the lid.

- EN** ⑤ Press the **Power** button and release it when the screen turns on.
- ⑥ Check if the WAH7608 has successfully connected to the mobile network.
- Note:** Your SIM card should have an active mobile data plan.

3 Connecting to the WAH7608

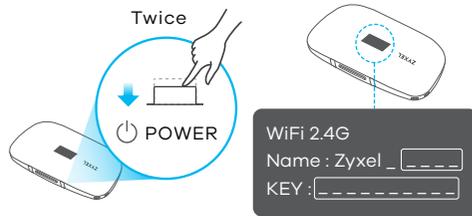


OR

Optional




- EN** Press the **Power** button twice to view the WAH7608's wireless network settings. From another device find this **Name** (SSID) and enter the **KEY** to connect wirelessly to the WAH7608.
OR
(Optional) If your client supports WPS, press its **WPS** button. Within 2 minutes, press the WAH7608's **WPS** button to begin WPS pairing.

Charge your WAH7608

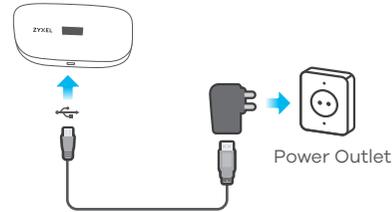


OR

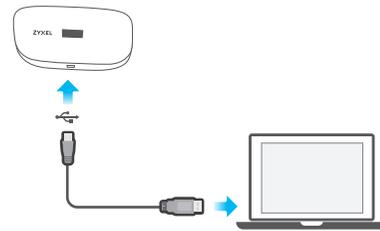

- EN** Use the included power adapter to connect the WAH7608 to a power outlet or a computer's USB port.

Download the App

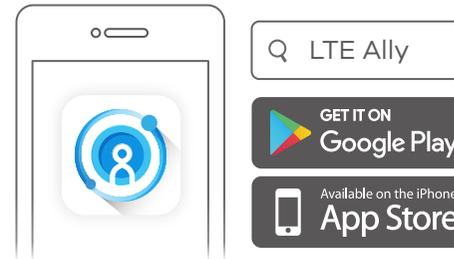

- EN** Download and use LTE Ally to configure the WAH7608's fast Internet sharing, control connected devices and data usage.

Troubleshooting

Problem: I cannot connect to the WAH7608 wireless network.

Possible Solutions:

1. Make sure the wireless network is enabled. Press the **WPS** button for 3 seconds to enable or disable the WAH7608's wireless network.
2. Make sure you used the correct **WiFi Name** and **KEY** to connect.
3. Remove the lid. Press the **Reset** button and release it when the screen displays **Reset** to return your WAH7608 to factory-default settings.

Problem: I am connected to the WAH7608 but cannot access the Internet.

Possible Solutions:

1. If your SIM card has a PIN code, use LTE Ally or connect to the web configurator (<http://192.168.1.1>) using the username (**admin**) and password (Default: **1234**) to unlock your SIM card.
2. Make sure your SIM card's account is valid and has an active data plan.
3. Make sure your data plan has not reached its limit.
4. Make sure you're in the ISP's coverage area.
5. Make sure you correctly inserted the SIM card in the SIM card slot.
6. Make sure your mobile access information (such as APN) is entered correctly. You can check this in the web configurator (<http://192.168.1.1>) or LTE Ally.

See the User's Guide at www.zyxel.com for more information, including customer support and safety warnings .

EU Importer
Zyxel Communications A/S
Gladsaxevej 378, 2. th. 2860 Søborg, Denmark.
<http://www.zyxel.dk>

US Importer
Zyxel Communications, Inc
1130 North Miller Street Anaheim, CA 92806-2001
<http://www.us.zyxel.com>